


Product Data

Split System Cooling

| | |
|----------------|------------------|
| 4A7A6024N1000A | 4A7A6018J1000A |
| 4A7A6036N1000A | 4A7A6024J1000A |
| 4A7A6048N1000A | 4A7A6030J1000A/B |
| 4A7A6060N1000A | 4A7A6035J1000A |
| | 4A7A6036J1000B |
| | 4A7A6041J1000A |
| | 4A7A6042J1000A |
| | 4A7A6048J1000A |
| | 4A7A6049J1000A |
| | 4A7A6060J1000B |
| | 4A7A6060K1000A |
| | 4A7A6061C1000A |

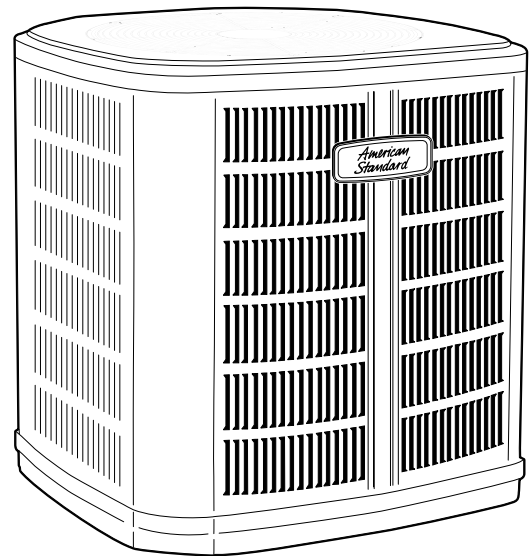

Note: "Graphics in this document are for representation only. Actual model may differ in appearance."

Product Specifications

| Model No. ^(a) | 4A7A6024N1000A | 4A7A6036N1000A | 4A7A6048N1000A | 4A7A6060N1000A |
|--|--------------------|--------------------|--------------------|--------------------|
| POWER CONNS. – V/PH/HZ ^(b) | 208/230/1/60 | 208/230/1/60 | 208/230/1/60 | 208/230/1/60 |
| MIN. BRCH. CIR. AMPACITY | 13.4 | 18.4 | 28 | 35 |
| BR. CIR. PROT. RTG. – MAX. (AMPS) | 20 | 30 | 45 | 60 |
| COMPRESSOR | DURATION™ - SCROLL | DURATION™ - SCROLL | DURATION™ - SCROLL | DURATION™ - SCROLL |
| No. Compress. – No. Stages | 1 – 2 | 1 – 2 | 1 – 2 | 1 – 2 |
| RL AMPS – LR AMPS | 10.2 – 55.2 | 14.2 – 78.1 | 20.4 – 122.1 | 26.9 – 152.9 |
| Outdoor Fan FL AMPS | 0.71 | 0.71 | 2.80 | 1.30 |
| Fan HP | 1/8 | 1/8 | 1/3 | 1/4 |
| Fan Dia (inches) | 27.6 | 27.6 | 27.6 | 27.6 |
| Coil | SPINE FIN™ | SPINE FIN™ | SPINE FIN™ | SPINE FIN™ |
| Refrigerant R-410A | 9 LBS., 4 OZ | 8 LBS., 12 OZ | 13 LBS., 3 OZ | 12 LBS., 9 OZ |
| LINE SIZE – IN. O.D. GAS ^(c) | 3/4 | 3/4 | 7/8 | 1–1/8 |
| LINE SIZE – IN. O.D. LIQ. ^(c) | 3/8 | 3/8 | 3/8 | 3/8 |
| Dimensions H x W X D Crated (IN.) | 46.4 x 35.1 x 38.7 | 51 x 35.1 x 38.7 | 51 x 35.1 x 38.7 | 51 x 35.1 x 38.7 |
| Weight – Shipping (lbs.) | 280 | 288 | 296 | 312 |
| Weight – Net (lbs.) | 244 | 250 | 259 | 275 |
| Start Components | NO | NO | NO | NO |
| Sound Enclosure | NO | NO | NO | NO |
| Compressor Sump Heat | NO | NO | NO | NO |
| Optional Accessories: | | | | |
| Rubber Isolator Kit | BAYISLT101 | BAYISLT101 | BAYISLT101 | BAYISLT101 |
| Snow Leg - Base & Cap 4" High | BAYLEGS002 | BAYLEGS002 | BAYLEGS002 | BAYLEGS002 |
| Snow Leg - 4" Extension | BAYLEGS003 | BAYLEGS003 | BAYLEGS003 | BAYLEGS003 |
| Hard Start Kit Scroll | BAYKSKT263 | BAYKSKT263 | BAYKSKT266 | BAYKSKT266 |
| Crankcase Heater Kit | BAYCCHT301 | BAYCCHT301 | BAYCCHT301 | BAYCCHT301 |
| Extreme Condition Mounting Kit | BAYECMT004 | BAYECMT004 | BAYECMT004 | BAYECMT004 |
| Vertical Discharge Air Kit Base 4 | BAYVDTA003 | BAYVDTA004 | BAYVDTA004 | BAYVDTA004 |
| Auto Charge Solenoid Kit | BAYCAKT001 | BAYCAKT001 | BAYCAKT001 | BAYCAKT001 |
| Refrigerant Lineset ^(d) | | | | |

^(a) Certified in accordance with the Air-Source Unitary Heat Pump Equipment certification program which is based on AHRI Standard 210/240.

^(b) Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

^(c) Standard line lengths – 60', Standard lift – 25' Suction and Liquid line. For Greater lengths and lifts refer to refrigerant piping software Pub#32-3312-0* (* denotes latest revision).

^(d) 25, 30, 35, and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the American Standard Quick Reference Guide.

Product Specifications

| Model No. ^(a) | 4A7A6018J1000A | 4A7A6024J1000A | 4A7A6030J1000A | 4A7A6030J1000B |
|---|--------------------|--------------------|--------------------|--------------------|
| POWER CONNS. – V/PH/HZ ^(b) | 208/230/1/60 | 208/230/1/60 | 208/230/1/60 | 208/230/1/60 |
| MIN. BRCH. CIR. AMPACITY | 12 | 13 | 17 | 14 |
| BR. CIR. PROT. RTG. – MAX. (AMPS) | 20 | 25 | 25 | 25 |
| COMPRESSOR | DURATION™ - SCROLL | DURATION™ - SCROLL | DURATION™ - SCROLL | DURATION™ - SCROLL |
| RL AMPS – LR AMPS | 9 – 47.5 | 10.1 – 52 | 12.8 – 67.8 | 10.9 – 62.6 |
| Outdoor Fan FL AMPS | 0.64 | 0.64 | 0.64 | 0.64 |
| Fan HP | 1/8 | 1/8 | 1/8 | 1/8 |
| Fan Dia (inches) | 23.02 – 1 | 23.02 | 23.02 | 23.02 |
| Coil | SPINE FIN™ | SPINE FIN™ | SPINE FIN™ | SPINE FIN™ |
| Refrigerant R-410A | 4 LBS., 15 OZ | 4 LBS., 11 OZ | 5 LBS., 8 OZ | 5 LBS., 8 OZ |
| VALVE CONNECTION SIZE – IN. O.D. GAS | 3/4 | 3/4 | 3/4 | 3/4 |
| VALVE CONNECTION SIZE – IN. O.D. LIQ. | 3/8 | 3/8 | 3/8 | 3/8 |
| LINE SIZE – IN. O.D. GAS ^(c) | 3/4 | 3/4 | 3/4 | 3/4 |
| LINE SIZE – IN. O.D. LIQ. | 3/8 | 3/8 | 3/8 | 3/8 |
| Charge Spec. Subcooling | 8°F | 8°F | 8°F | 8°F |
| Dimensions H x W X D Crated (IN.) | 34 x 30.1 x 33 | 34 x 30.1 x 33 | 42 x 30.1 x 33 | 42 x 30.1 x 33 |
| Weight – Shipping (lbs.) | 189 | 190 | 220 | 220 |
| Weight – Net (lbs.) | 161 | 162 | 184 | 184 |
| Optional Accessories: | | | | |
| Anti-short Cycle Timer | TAYASCT501A | TAYASCT501A | TAYASCT501A | TAYASCT501A |
| Evaporator Defrost Control | AY28X079 | AY28X079 | AY28X079 | AY28X079 |
| Rubber Isolator Kit | BAYISLT101 | BAYISLT101 | BAYISLT101 | BAYISLT101 |
| Extreme Condition Mount Kit | BAYECMT023 | BAYECMT023 | BAYECMT023 | BAYECMT023 |
| Start Kit | BAYKSKT263 | BAYKSKT263 | BAYKSKT263 | BAYKSKT263 |
| Crankcase Heater Kit | BAYCCHT302 | BAYCCHT302 | BAYCCHT302 | BAYCCHT302 |
| Seacoast Kit | BAYSEAC001 | BAYSEAC001 | BAYSEAC001 | BAYSEAC001 |
| Low Ambient Kit | BAYLOAM103 | BAYLOAM103 | BAYLOAM103 | BAYLOAM103 |
| Service Valve Panel Cover | AAYSVPANL0032AA | AAYSVPANL0032AA | AAYSVPANL0044AA | AAYSVPANL0044AA |
| Refrigerant Lineset ^(d) | | | | |

^(a) Certified in accordance with the Unitary Air-conditioner equipment certification program which is based on AHRI standard 210/240.

^(b) Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

^(c) Standard line lengths – 60', Standard lift – 60' Suction and Liquid line. For Greater lengths and lifts refer to refrigerant piping software Pub#32–3312–0* (* denotes latest revision).

^(d) 25, 30, 35, and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the American Standard Quick Reference Guide.

Product Specifications

| Model No. ^(a) | 4A7A6035J1000A | 4A7A6036J1000B | 4A7A6041J1000A |
|---|--------------------|--------------------|--------------------|
| POWER CONNS. – V/PH/HZ ^(b) | 208/230/1/60 | 208/230/1/60 | 208/230/1/60 |
| MIN. BRCH. CIR. AMPACITY | 16 | 18 | 20 |
| BR. CIR. PROT. RTG. – MAX. (AMPS) | 25 | 30 | 35 |
| COMPRESSOR | DURATION™ - SCROLL | DURATION™ - SCROLL | DURATION™ - SCROLL |
| RL AMPS – LR AMPS | 12.2 – 80.1 | 13.6 – 79 | 15.4 – 92.1 |
| Outdoor Fan FL AMPS | 0.77 | 0.77 | 1.05 |
| Fan HP | 1/8 | 1/8 | 1/5 |
| Fan Dia (inches) | 23.02 | 24 | 27.5 |
| Coil | SPINE FIN™ | SPINE FIN™ | SPINE FIN™ |
| Refrigerant R-410A | 5 LBS., 11 OZ | 6 LBS., 8 OZ | 6 LBS., 6 OZ |
| VALVE CONNECTION SIZE – IN. O.D. GAS | 3/4 | 3/4 | 3/4 |
| VALVE CONNECTION SIZE – IN. O.D. LIQ. | 3/8 | 3/8 | 3/8 |
| LINE SIZE – IN. O.D. GAS ^(c) | 3/4 | 7/8 | 7/8 |
| LINE SIZE – IN. O.D. LIQ. | 3/8 | 3/8 | 3/8 |
| Charge Spec. Subcooling | 10°F | 8°F | 10°F |
| Dimensions H x W X D Crated (IN.) | 38 x 30.1 x 33 | 42 x 35.1 x 38.7 | 42 x 35.1 x 38.7 |
| Weight – Shipping (lbs.) | 183 | 246 | 246 |
| Weight – Net (lbs.) | 156 | 212 | 212 |
| Optional Accessories: | | | |
| Anti-short Cycle Timer | TAYASCT501A | TAYASCT501A | TAYASCT501A |
| Evaporator Defrost Control | AY28X079 | AY28X079 | AY28X079 |
| Rubber Isolator Kit | BAYISLT101 | BAYISLT101 | BAYISLT101 |
| Extreme Condition Mount Kit | BAYECMT004 | BAYECMT004 | BAYECMT004 |
| Start Kit | BAYKSKT263 | BAYKSKT263 | BAYKSKT263 |
| Crankcase Heater Kit | BAYCCHT302 | BAYCCHT302 | BAYCCHT302 |
| Seacoast Kit | BAYSEAC001 | BAYSEAC001 | BAYSEAC001 |
| Low Ambient Kit | BAYLOAM103 | BAYLOAM103 | BAYLOAM103 |
| Service Valve Panel Cover | AAYSVPANL0044AA | AAYSVPANL0044AA | AAYSVPANL0046AA |
| Refrigerant Lineset ^(d) | | | |

^(a) Certified in accordance with the Unitary Air-conditioner equipment certification program which is based on AHRI standard 210/240.

^(b) Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

^(c) Standard line lengths – 60', Standard lift – 60' Suction and Liquid line. For Greater lengths and lifts refer to refrigerant piping software Pub#32–3312–0* (* denotes latest revision).

^(d) 25, 30, 35, and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the American Standard Quick Reference Guide.

Product Specifications

| Model No. ^(a) | 4A7A6042J1000A | 4A7A6048J1000A | 4A7A6049J1000A |
|---|--------------------|--------------------|--------------------|
| POWER CONNS. – V/PH/HZ ^(b) | 208/230/1/60 | 208/230/1/60 | 208/230/1/60 |
| MIN. BRCH. CIR. AMPACITY | 21 | 24 | 26 |
| BR. CIR. PROT. RTG. – MAX. (AMPS) | 35 | 40 | 40 |
| COMPRESSOR | DURATION™ - SCROLL | DURATION™ - SCROLL | DURATION™ - SCROLL |
| RL AMPS – LR AMPS | 16.7 – 109 | 18.5 – 124 | 18.5 – 124 |
| Outdoor Fan FL AMPS | 0.64 | 0.93 | 2.80 |
| Fan HP | 1/8 | 1/5 | 1/3 |
| Fan Dia (inches) | 27.5 | 27.5 | 27.5 |
| Coil | SPINE FIN™ | SPINE FIN™ | SPINE FIN™ |
| Refrigerant R-410A | 8 LBS., 2 OZ | 7 LBS., 2 OZ | 10 LBS., 10 OZ |
| VALVE CONNECTION SIZE – IN. O.D. GAS | 7/8 | 7/8 | 7/8 |
| VALVE CONNECTION SIZE – IN. O.D. LIQ. | 3/8 | 3/8 | 3/8 |
| LINE SIZE – IN. O.D. GAS ^(c) | 7/8 | 7/8 | 7/8 |
| LINE SIZE – IN. O.D. LIQ. | 3/8 | 3/8 | 3/8 |
| Charge Spec. Subcooling | 8°F | 8°F | 10°F |
| Dimensions H x W X D Crated (IN.) | 50.4 x 35.1 x 38.7 | 50.4 x 35.1 x 38.7 | 50.4 x 35.1 x 38.7 |
| Weight – Shipping (lbs.) | 302 | 306 | 322 |
| Weight – Net (lbs.) | 252 | 256 | 272 |
| Optional Accessories: | | | |
| Anti-short Cycle Timer | TAYASCT501A | TAYASCT501A | TAYASCT501A |
| Evaporator Defrost Control | AY28X079 | AY28X079 | AY28X079 |
| Rubber Isolator Kit | BAYISLT101 | BAYISLT101 | BAYISLT101 |
| Extreme Condition Mount Kit | BAYECMT004 | BAYECMT004 | BAYECMT004 |
| Start Kit | BAYKSKT263 | BAYKSKT263 | BAYKSKT263 |
| Crankcase Heater Kit | BAYCCHT302 | BAYCCHT302 | BAYCCHT302 |
| Seacoast Kit | BAYSEAC001 | BAYSEAC001 | BAYSEAC001 |
| Low Ambient Kit | BAYLOAM103 | BAYLOAM103 | BAYLOAM103 |
| Service Valve Panel Cover | AAYSVPANL0046AA | AAYSVPANL0046AA | AAYSVPANL0046AA |
| Refrigerant Lineset ^(d) | | | |

^(a) Certified in accordance with the Unitary Air-conditioner equipment certification program which is based on AHRI standard 210/240.

^(b) Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

^(c) Standard line lengths – 60', Standard lift – 60' Suction and Liquid line. For Greater lengths and lifts refer to refrigerant piping software Pub#32-3312-0* (* denotes latest revision).

^(d) 25, 30, 35, and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the American Standard Quick Reference Guide.

Product Specifications

| Model No. ^(a) | 4A7A6060J1000B | 4A7A6060K1000A | 4A7A6061C1000A |
|---|--------------------|--------------------|--------------------|
| POWER CONNS. – V/PH/HZ ^(b) | 208/230/1/60 | 208/230/1/60 | 208/230/1/60 |
| MIN. BRCH. CIR. AMPACITY | 27 | 28 | 29 |
| BR. CIR. PROT. RTG. – MAX. (AMPS) | 45 | 50 | 50 |
| COMPRESSOR | DURATION™ - SCROLL | DURATION™ - SCROLL | DURATION™ - SCROLL |
| RL AMPS – LR AMPS | 20.8 – 127.1 | 21.9 – 118.7 | 20.8 – 127.1 |
| Outdoor Fan FL AMPS | 1.05 | 0.97 | 1.05 |
| Fan HP | 1/5 | 1/5 | 1/5 |
| Fan Dia (inches) | 27.5 | 27.5 | 27.6 |
| Coil | SPINE FIN™ | SPINE FIN™ | SPINE FIN™ |
| Refrigerant R-410A | 10 LBS., 6 OZ | 9 LBS., 8 OZ | 11 LBS., 13 OZ |
| VALVE CONNECTION SIZE – IN. O.D. GAS | 7/8 | 7/8 | 7/8 |
| VALVE CONNECTION SIZE – IN. O.D. LIQ. | 3/8 | 3/8 | 3/8 |
| LINE SIZE – IN. O.D. GAS ^(c) | 1–1/8 | 1–1/8 | 1–1/8 |
| LINE SIZE – IN. O.D. LIQ. | 3/8 | 3/8 | 3/8 |
| Charge Spec. Subcooling | 10°F | 10°F | 10°F |
| Dimensions H x W X D Crated (IN.) | 50.4 x 35.1 x 38.7 | 50.4 x 35.1 x 38.7 | 50.4 x 35.1 x 38.7 |
| Weight – Shipping (lbs.) | 327 | 302 | 317 |
| Weight – Net (lbs.) | 277 | 252 | 280 |
| Optional Accessories: | | | |
| Anti-short Cycle Timer | TAYASCT501A | TAYASCT501A | TAYASCT501A |
| Evaporator Defrost Control | AY28X079 | AY28X079 | AY28X079 |
| Rubber Isolator Kit | BAYISLT101 | BAYISLT101 | BAYISLT101 |
| Extreme Condition Mount Kit | BAYECMT004 | BAYECMT004 | BAYECMT004 |
| Start Kit | BAYKSKT263 | BAYKSKT263 | BAYKSKT263 |
| Crankcase Heater Kit | BAYCCHT302 | BAYCCHT302 | BAYCCHT302 |
| Seacoast Kit | BAYSEAC001 | BAYSEAC001 | BAYSEAC001 |
| Low Ambient Kit | BAYLOAM103 | BAYLOAM103 | BAYLOAM103 |
| Service Valve Panel Cover | AAYSVPANL0046AA | AAYSVPANL0046AA | AAYSVPANL0046AA |
| Refrigerant Lineset ^(d) | | | |

^(a) Certified in accordance with the Unitary Air-conditioner equipment certification program which is based on AHRI standard 210/240.

^(b) Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

^(c) Standard line lengths – 60', Standard lift – 60' Suction and Liquid line. For Greater lengths and lifts refer to refrigerant piping software Pub#32–3312–0* (* denotes latest revision).

^(d) 25, 30, 35, and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the American Standard Quick Reference Guide.

Sound Power Level

| Sound Power Level | | | | | | | | | |
|-------------------|--------------------------------------|-----------------------------|--------|--------|--------|---------|---------|---------|---------|
| MODEL | A-Weighted Sound Power Level [dB(A)] | Full Octave Sound Power(dB) | | | | | | | |
| | | 63 Hz* | 125 Hz | 250 Hz | 500 Hz | 1000 Hz | 2000 Hz | 4000 Hz | 8000 Hz |
| 4A7A6024N | 72 | 70 | 69 | 63 | 66 | 60 | 56 | 53 | 48 |
| 4A7A6036N | 72 | 64 | 67 | 65 | 64 | 60 | 56 | 54 | 50 |
| 4A7A6048N | 73 | 70 | 67 | 68 | 66 | 63 | 56 | 53 | 49 |
| 4A7A6060N | 74 | 68 | 70 | 66 | 69 | 66 | 57 | 57 | 53 |

Note: Rated in accordance with AHRI Standard 270-2008 *For Reference Only

| Sound Power Level | | | | | | | | | |
|-------------------|--------------------------------------|-----------------------------|--------|--------|--------|---------|---------|---------|---------|
| MODEL | A-Weighted Sound Power Level [dB(A)] | Full Octave Sound Power(dB) | | | | | | | |
| | | 63 Hz* | 125 Hz | 250 Hz | 500 Hz | 1000 Hz | 2000 Hz | 4000 Hz | 8000 Hz |
| 4A7A6018J | 73 | 79 | 69 | 67 | 70 | 70 | 64 | 59 | 53 |
| 4A7A6024J | 73 | 79 | 69 | 67 | 70 | 70 | 64 | 59 | 53 |
| 4A7A6030J | 73 | 79 | 69 | 67 | 70 | 70 | 64 | 59 | 53 |
| 4A7A6035J | 71 | 78 | 72 | 69 | 68 | 66 | 61 | 58 | 53 |
| 4A7A6036J | 71 | 78 | 72 | 69 | 68 | 66 | 61 | 58 | 53 |
| 4A7A6041J | 72 | 81 | 75 | 71 | 70 | 68 | 63 | 58 | 53 |
| 4A7A6042J | 72 | 81 | 75 | 71 | 70 | 68 | 63 | 58 | 53 |
| 4A7A6048J | 72 | 81 | 75 | 71 | 70 | 68 | 63 | 58 | 53 |
| 4A7A6049J | 72 | 81 | 75 | 71 | 70 | 68 | 63 | 58 | 53 |
| 4A7A6060J | 72 | 81 | 75 | 71 | 70 | 68 | 63 | 58 | 53 |
| 4A7A6060K | 72 | 81 | 75 | 71 | 70 | 68 | 63 | 58 | 53 |
| 4A7A6061C | 74 | 68 | 56 | 63 | 73 | 69 | 64 | 59 | 51 |

Note: Rated in accordance with AHRI Standard 270-2008 *For Reference Only

Accessory Description and Usage

Anti-Short Cycle Timer — Solid state timing device that prevents compressor recycling until five (5) minutes have elapsed after satisfying call or power interruptions. Use in area with questionable power delivery, commercial applications, long lineset, etc.

Evaporation Defrost Control — SPST Temperature actuated switch that cycles the condenser off as indoor coil reaches freeze-up conditions. Used for low ambient cooling to 30°F with TXV.

Rubber Isolators — Five (5) large rubber donuts to isolate condensing unit from transmitting energy into mounting frame or pad. Use on any application where sound transmission needs to be minimized.

Hard Start Kit — Start capacitor and relay to assist compressor motor startup. Use in areas with marginal power supply, on long linesets, low ambient conditions, etc.

Extreme Condition Mount Kit — Bracket kits to securely mount condensing unit to a frame or pad without removing any panels. Use in areas with high winds, or on commercial roof tops, etc.


AHRI Standard Capacity Rating Conditions

AHRI Standard 210/240 Rating Conditions

1. Cooling 80°F DB, 67°F WB air entering indoor coil, 95°F DB air entering outdoor coil.
2. High Temperature Heating 47°F DB, 43°F WB air entering outdoor coil, 70°F DB air entering indoor coil.
3. Low Temperature Heating 17°F DB air entering indoor coil.
4. Rated indoor airflow for heating is the same as for cooling.



AHRI Standard 270 Rating Conditions — (Noise rating numbers are determined with the unit in cooling operations.) Standard Noise Rating number is at 95°F outdoor air.

Model Nomenclature

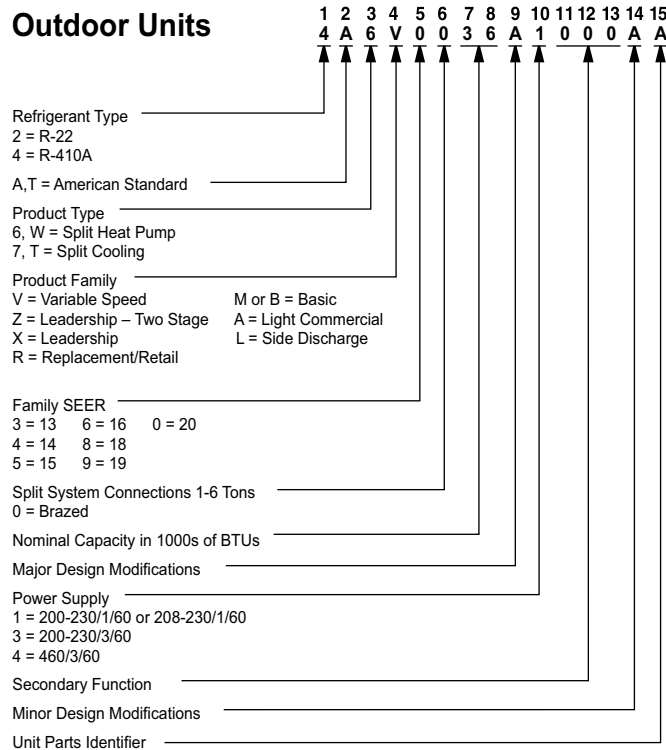

Schematic Diagrams

Figure 1. 024N & 036N Models

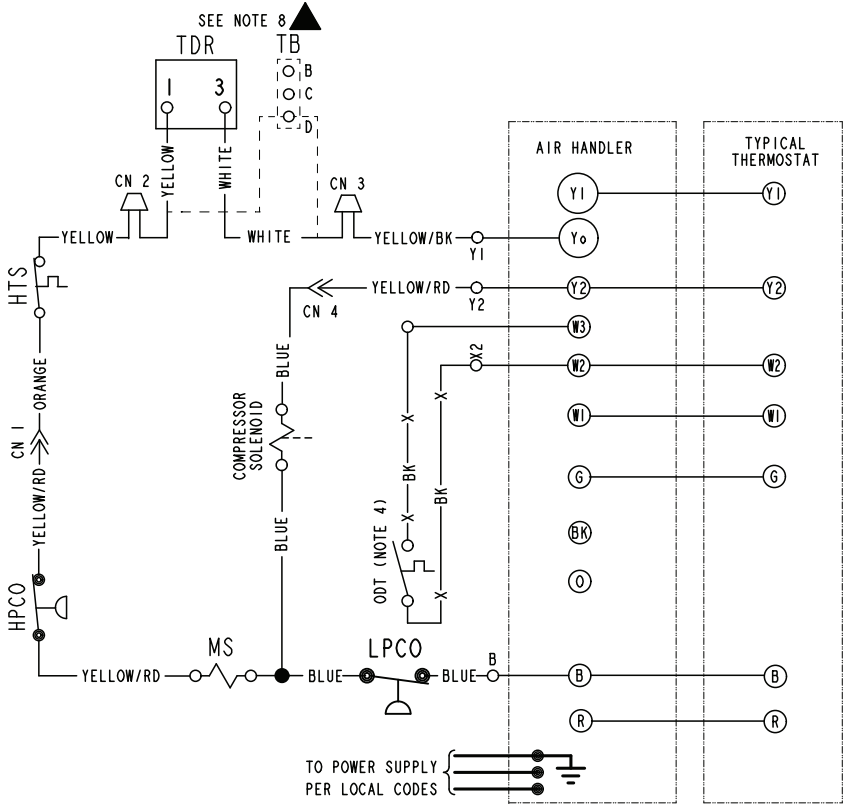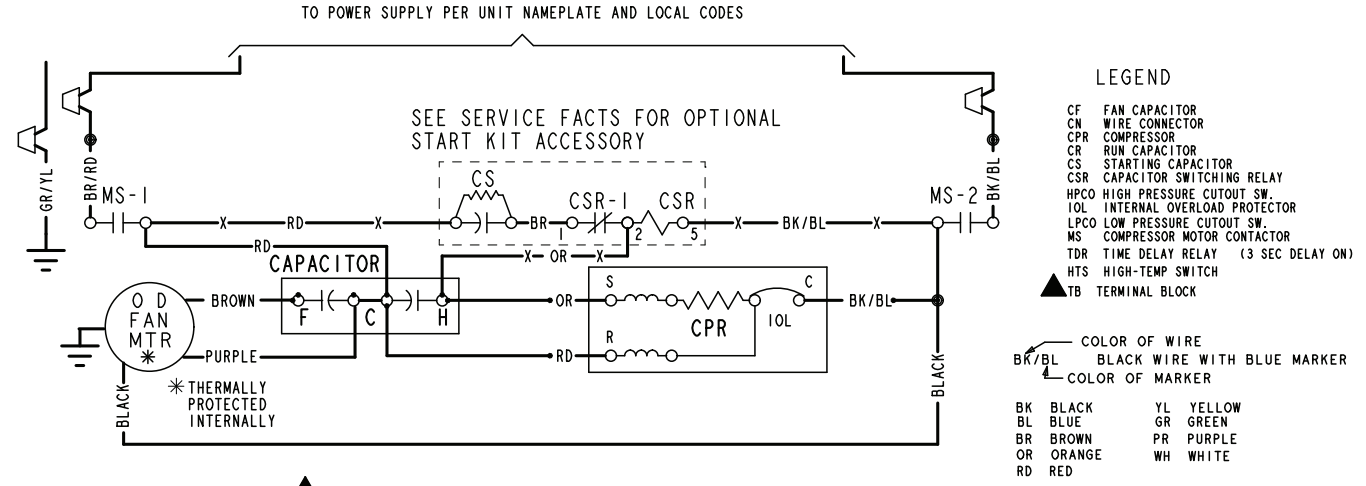

| | |
|--|---|
| <p>▲ WARNING HAZARDOUS VOLTAGE! DISCONNECT ALL ELECTRIC POWER INCLUDING REMOTE DISCONNECTS BEFORE SERVICING. FAILURE TO DISCONNECT POWER BEFORE SERVICING CAN CAUSE SEVERE PERSONAL INJURY OR DEATH!</p> | <p>▲ CAUTION USE COPPER CONDUCTORS ONLY! UNIT TERMINALS ARE NOT DESIGNED TO ACCEPT OTHER TYPES OF CONDUCTORS. FAILURE TO DO SO MAY CAUSE DAMAGE TO THE EQUIPMENT!</p> |
|--|---|

- NOTES:**
1. BE SURE POWER SUPPLY AGREES WITH EQUIPMENT NAMEPLATE.
 2. POWER WIRING AND GROUNDING OF EQUIPMENT MUST COMPLY WITH LOCAL CODES.
 3. LOW VOLTAGE WIRING TO BE NO. 18 AWG MINIMUM CONDUCTOR.
 4. IF OUTDOOR THERMOSTAT (ODT) IS NOT USED, CONNECT W2 TO W3.
 5. WITH Y1 ENERGIZED, INDOOR FAN IS 1ST STAGE AIRFLOW.
 6. WITH Y1 & Y2 ENERGIZED, INDOOR FAN IS 2ND STAGE AIRFLOW.
 7. SEE AIR HANDLER INSTALLER GUIDE FOR DIP SWITCH CONFIGURATIONS.
 8. USE EITHER TDR OR TB. DO NOT USE BOTH IN ONE MODEL. TB IS ALTERNATE FOR TDR.

FOR CANADIAN INSTALLATIONS
 POUR INSTALLATIONS CANADIENNES


CAUTION: NOT SUITABLE FOR USE ON SYSTEMS EXCEEDING 150V-TO-GROUND.
ATTENTION: NE CONVIENT PAS AUX INSTALLATIONS DE PLUS DE 150 V A LA TERRE.

PRINTED FROM D157615P04 REV B

Figure 2. 024N & 036N Models

LEGEND-EQUIPMENT DIAGRAM


- 24 V. } FACTORY WIRING
- LINE V. }
- - - 24 V. } FIELD WIRING
- - - LINE V. }
- ⊥ GROUND
- JUNCTION
- ⊕ WIRE NUT OR CONNECTOR
- ⌚ COIL
- ⊥ CAPACITOR
- ⊥ RELAY CONTACT (N.O.)
- ⊥ RELAY CONTACT (N.C.)
- ⊙ THERMISTOR
- ⊙ INTERNAL OVERLOAD PROTECTOR
- ⊙ PRESSURE ACTUATED SWITCH
- ⊙ TEMP. ACTUATED SWITCH
- ⊙ POL. PLUG FEMALE HOUSING (MALE TERM.)
- ⊙ POL. PLUG MALE HOUSING (FEMALE TERM.)
- ⊙ RESISTOR OR HEATING ELEMENT
- ⊙ MOTOR WINDING
- ⊙ TERMINAL
- ⊙ SINGLE INLINE CONNECTION
- ▲ - - - OPTIONAL CONNECTION

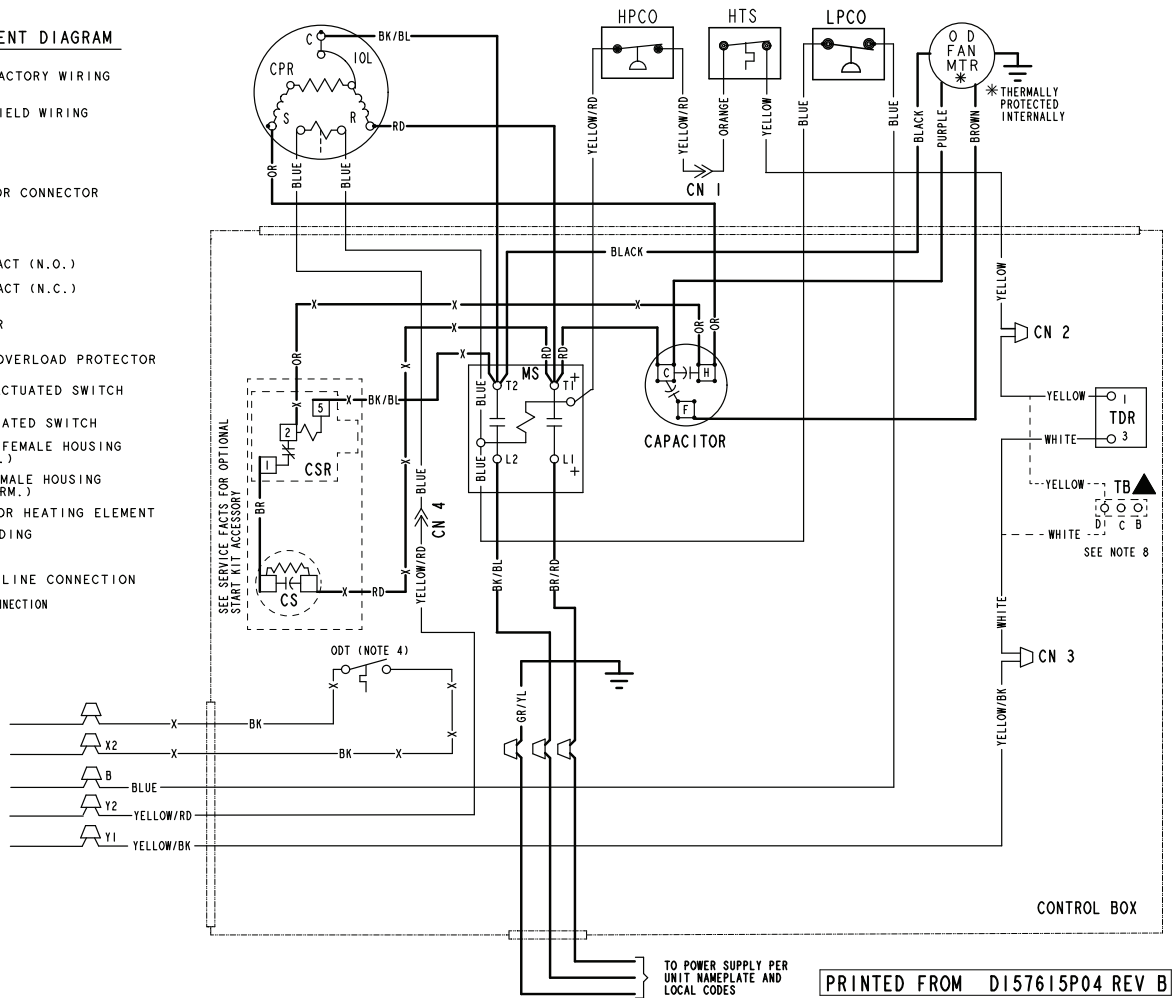

PRINTED FROM DI57615P04 REV B

Figure 3. 048N Models

TO POWER SUPPLY PER UNIT NAMEPLATE AND LOCAL CODES

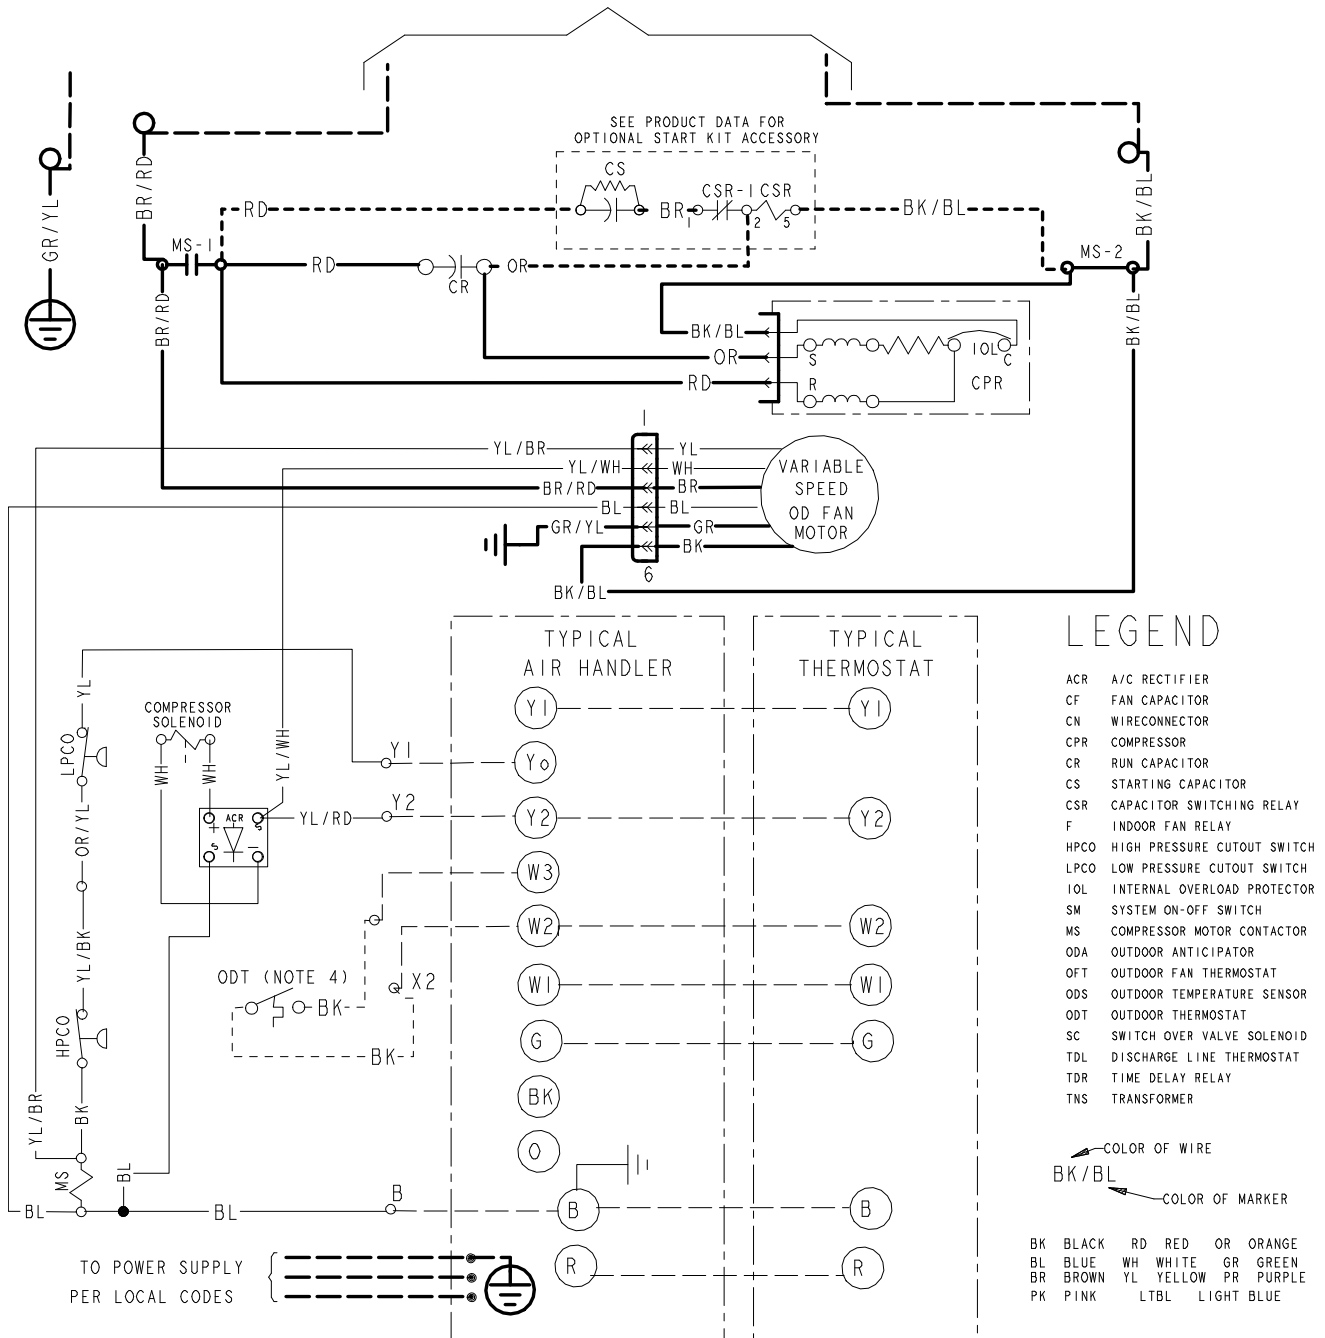

FOR CANADIAN INSTALLATIONS
POUR INSTALLATIONS CANADIENNES

CAUTION: NOT SUITABLE FOR USE ON SYSTEMS EXCEEDING 150V-TO-GROUND
ATTENTION: NE CONVIENT PAS AUX INSTALLATIONS DE PLUS DE 150 V A LA TERRE

PRINTED FROM DI6014IP01 REV B

Schematic Diagrams

Figure 4. 048N Models

NOTES:

1. BE SURE POWER SUPPLY AGREES WITH EQUIPMENT NAMEPLATE.
2. POWER WIRING AND GROUNDING OF EQUIPMENT MUST COMPLY WITH LOCAL CODES.
3. LOW VOLTAGE WIRING TO BE NO. 18 AWG MINIMUM CONDUCTOR.
4. IF OUTDOOR THERMOSTAT (ODT) IS NOT USED, CONNECT W2 TO W3.
5. WITH Y1 ENERGIZED, INDOOR FAN IS 1ST STAGE AIRFLOW.
6. WITH Y1 AND Y2 ENERGIZED, INDOOR FAN IS 2ND STAGE AIRFLOW.
7. SEE AIR HANDLER INSTALLER GUIDE FOR DIP SWITCH CONFIGURATIONS.

LEGEND

| | |
|--------------------------------|---|
| 24 V } FACTORY WIRING | RELAY CONTACT (N.O) |
| 24 V } FIELD WIRING | RELAY CONTACT (N.C) |
| 24 V } FIELD WIRING | THERMISTOR |
| FIELD INSTALLED FACTORY WIRING | TEMP ACTUATED SWITCH |
| MAGNETIC COIL | INTERNAL OVERLOAD PROTECTION |
| GROUND | PRESSURE ACTUATED SWITCH |
| JUNCTION | RESISTOR OR HEATING ELEMENT |
| CAPACITOR | MOTOR WINDING |
| WIRE NUT OR TERMINAL | POL. PLUG FEMALE HOUSING (MALE TERMINALS) |
| TRANSFORMER | POL. PLUG MALE HOUSING (FEMALE TERMINALS) |
| FUSE | |
| TERMINAL BLOCK/BOARD | |


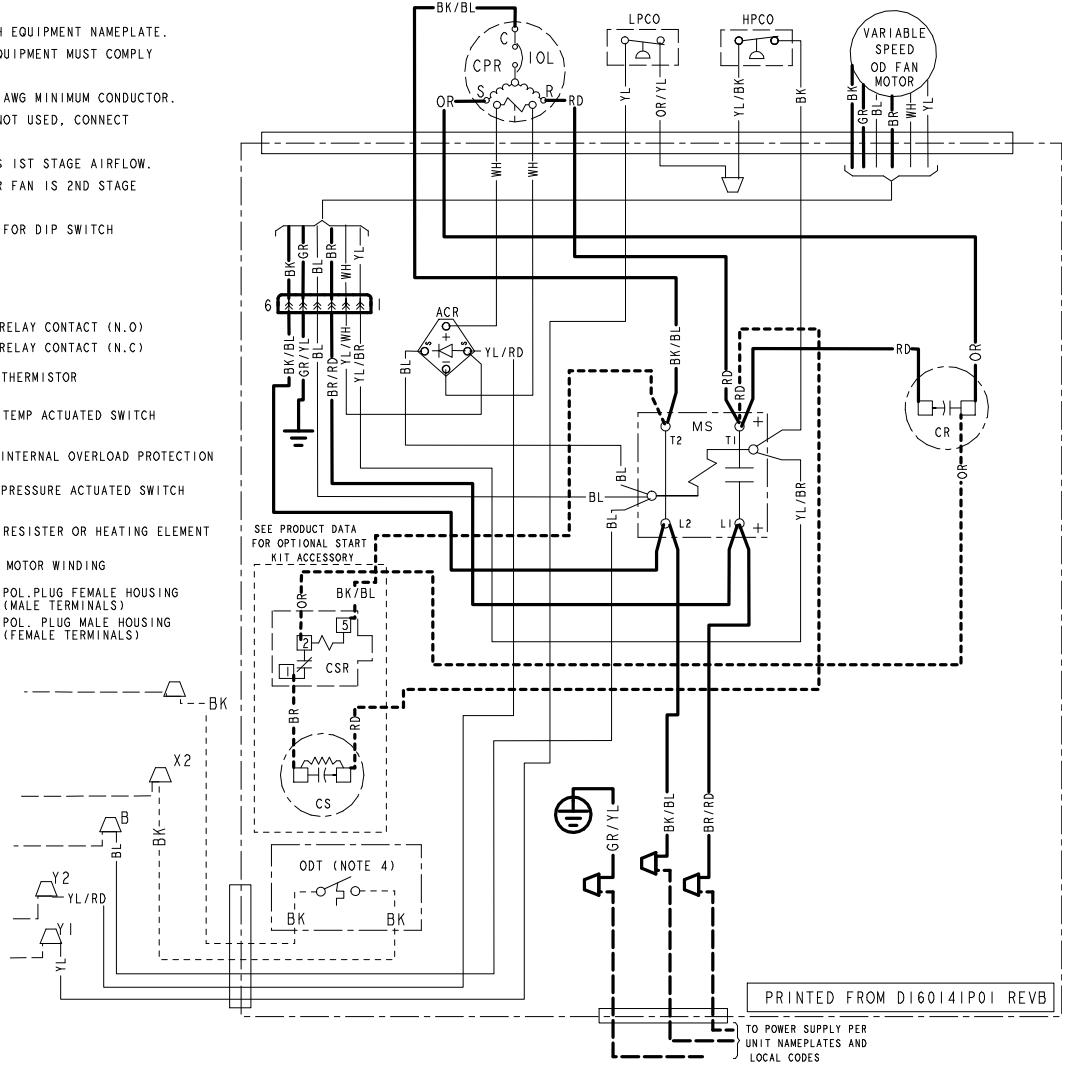



Figure 5. 060N Models

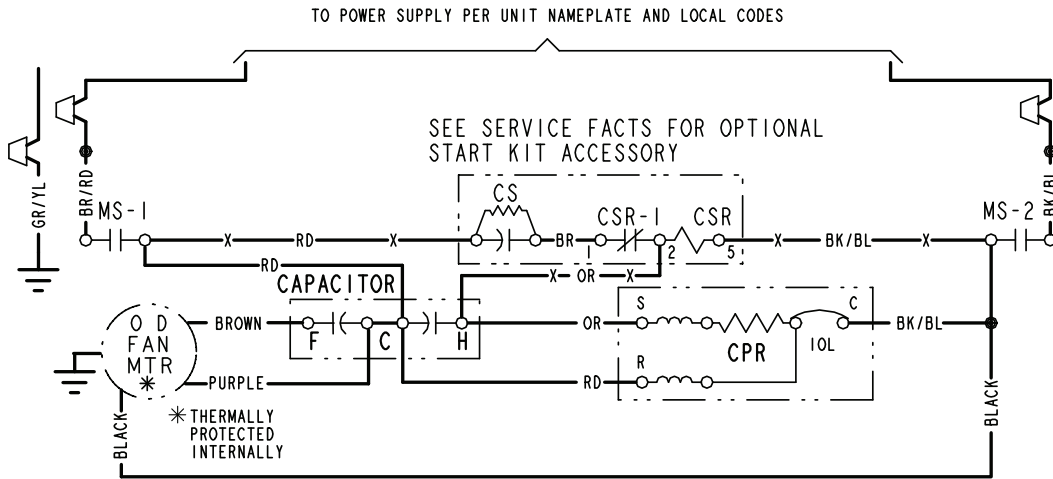

LEGEND

- CA COOLING ANTICIPATOR
- CBS COIL BOTTOM SENSOR
- CF FAN CAPACITOR
- CN WIRE CONNECTOR
- CPR COMPRESSOR
- CR RUN CAPACITOR
- CS STARTING CAPACITOR
- CSR CAPACITOR SWITCHING RELAY
- DFC DEFROST CONTROL
- F INDOOR FAN RELAY
- HA HEATING ANTICIPATOR
- HPCO HIGH PRESSURE CUTOUT SW.
- IOL INTERNAL OVERLOAD PROTECTOR
- ACR A/C RECTIFIER
- LPCO LOW PRESSURE CUTOUT SW.
- MS COMPRESSOR MOTOR CONTACTOR
- ODA OUTDOOR ANTICIPATOR
- OFT OUTDOOR FAN THERMOSTAT
- ODS OUTDOOR TEMPERATURE SENSOR
- ODT OUTDOOR THERMOSTAT
- RHS RESISTANCE HEAT SWITCH
- SC SWITCHOVER VALVE SOLENOID
- SM SYSTEM "ON-OFF" SWITCH
- TDL DISCHARGE LINE THERMOSTAT
- TDR TIME DELAY RELAY (5 SEC DELAY ON)
- TNS TRANSFORMER
- TS HEATING-COOLING THERMOSTAT
- TSH HEATING THERMOSTAT

- COLOR OF WIRE
- BK/BL BLACK WIRE WITH BLUE MARKER
- COLOR OF MARKER
- | | | |
|----------|-----------|-----------|
| BK BLACK | OR ORANGE | YL YELLOW |
| BL BLUE | RD RED | GR GREEN |
| BR BROWN | WH WHITE | PR PURPLE |

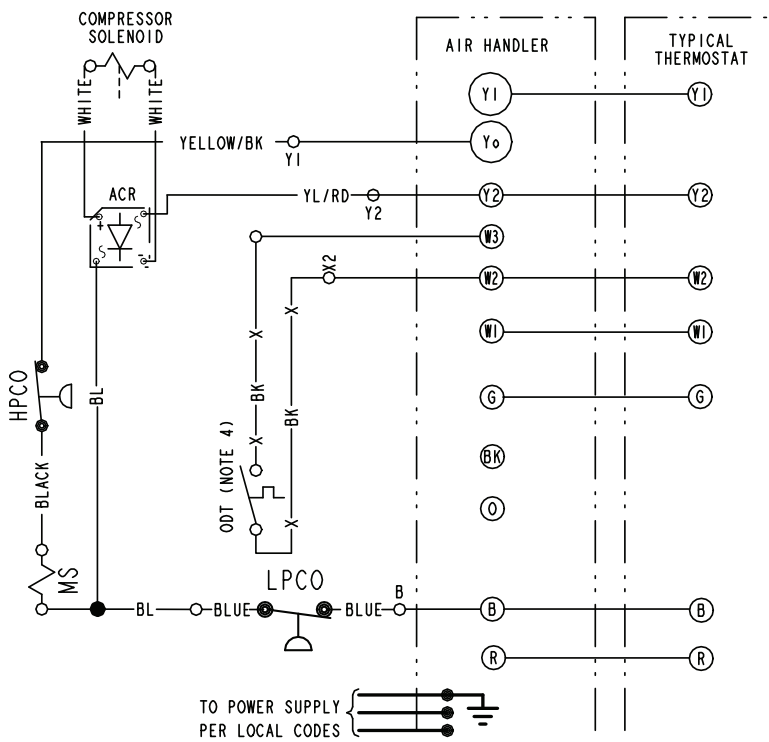

FOR CANADIAN INSTALLATIONS
POUR INSTALLATIONS CANADIENNES

CAUTION: NOT SUITABLE FOR USE ON SYSTEMS EXCEEDING 150V-TO-GROUND.
ATTENTION: NE CONVIENT PAS AUX INSTALLATIONS DE PLUS DE 150 V A LA TERRE.

| | |
|---|--|
| <p>⚠ WARNING HAZARDOUS VOLTAGE! DISCONNECT ALL ELECTRIC POWER INCLUDING REMOTE DISCONNECTS BEFORE SERVICING. FAILURE TO DISCONNECT POWER BEFORE SERVICING CAN CAUSE SEVERE PERSONAL INJURY OR DEATH!</p> | <p>⚠ CAUTION USE COPPER CONDUCTORS ONLY! UNIT TERMINALS ARE NOT DESIGNED TO ACCEPT OTHER TYPES OF CONDUCTORS. FAILURE TO DO SO MAY CAUSE DAMAGE TO THE EQUIPMENT!</p> |
|---|--|

PRINTED FROM D157615P03 REV A

Schematic Diagrams

Figure 6. 060N Models

NOTES:

1. BE SURE POWER SUPPLY AGREES WITH EQUIPMENT NAMEPLATE.
2. POWER WIRING AND GROUNDING OF EQUIPMENT MUST COMPLY WITH LOCAL CODES.
3. LOW VOLTAGE WIRING TO BE NO. 18 AWG MINIMUM CONDUCTOR.
4. IF OUTDOOR THERMOSTAT (ODT) IS NOT USED, CONNECT W2 TO W3.
5. WITH Y1 ENERGIZED, INDOOR FAN IS 1ST STAGE AIRFLOW.
6. WITH Y1 & Y2 ENERGIZED, INDOOR FAN IS 2ND STAGE AIRFLOW.
7. SEE AIR HANDLER INSTALLER GUIDE FOR DIP SWITCH CONFIGURATIONS.

LEGEND-EQUIPMENT DIAGRAM

- 24 V. } FACTORY WIRING
- 24 V. } FIELD WIRING
- LINE V. }
- ⊕ GROUND
- JUNCTION
- ⊕ WIRE NUT OR CONNECTOR
- ⊖ COIL
- ⊖ CAPACITOR
- ⊖ RELAY CONTACT (N.O.)
- ⊖ RELAY CONTACT (N.C.)
- ⊖ THERMISTOR
- ⊖ INTERNAL OVERLOAD PROTECTOR
- ⊖ PRESSURE ACTUATED SWITCH
- ⊖ TEMP. ACTUATED SWITCH
- ⊖ POL. PLUG FEMALE HOUSING (MALE TERM.)
- ⊖ POL. PLUG MALE HOUSING (FEMALE TERM.)
- ⊖ RESISTOR OR HEATING ELEMENT
- ⊖ MOTOR WINDING
- TERMINAL


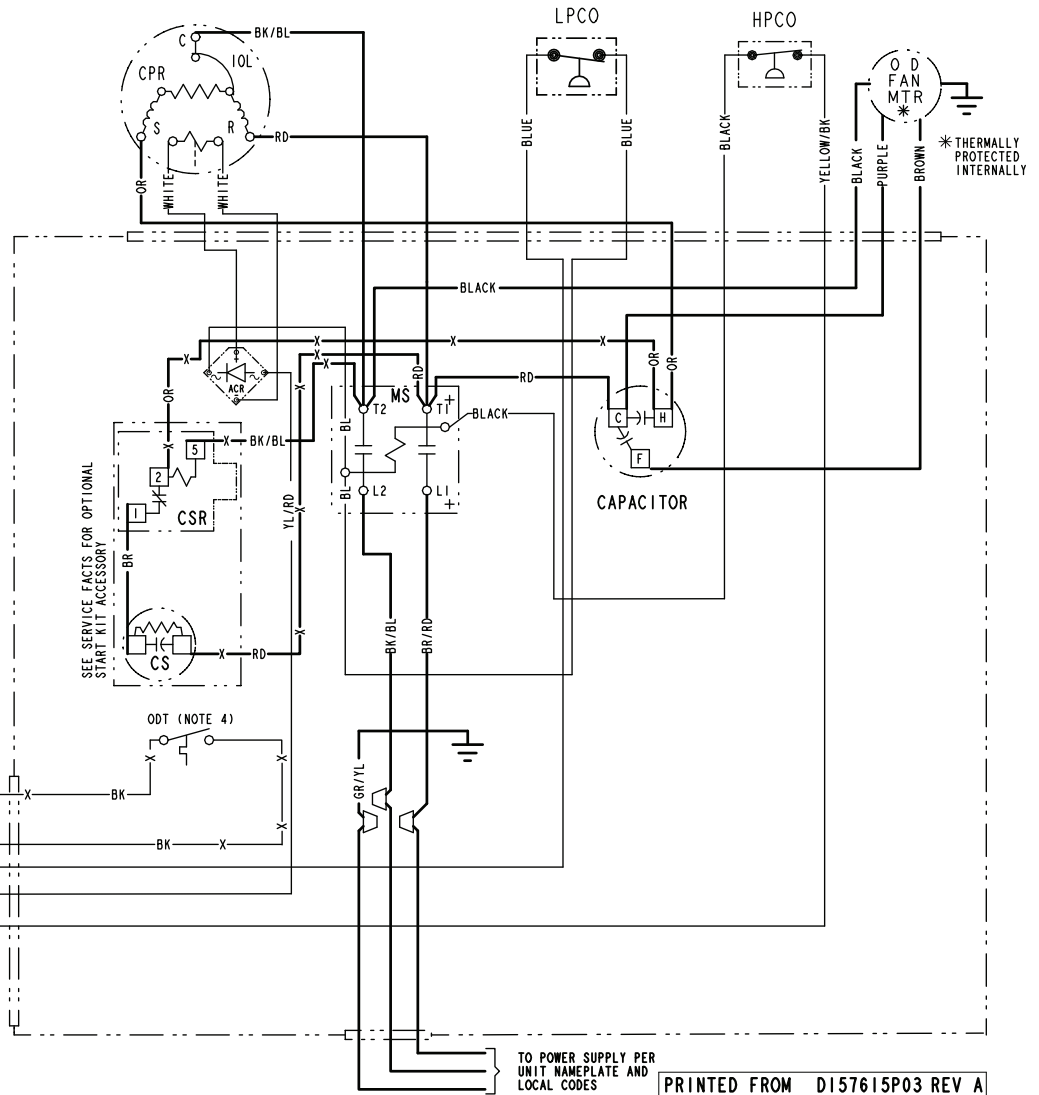


Figure 7. 018J, 024J, 030J, 036J, 041J, 042J & 048J Models

TO POWER SUPPLY PER UNIT NAMEPLATE AND LOCAL CODES

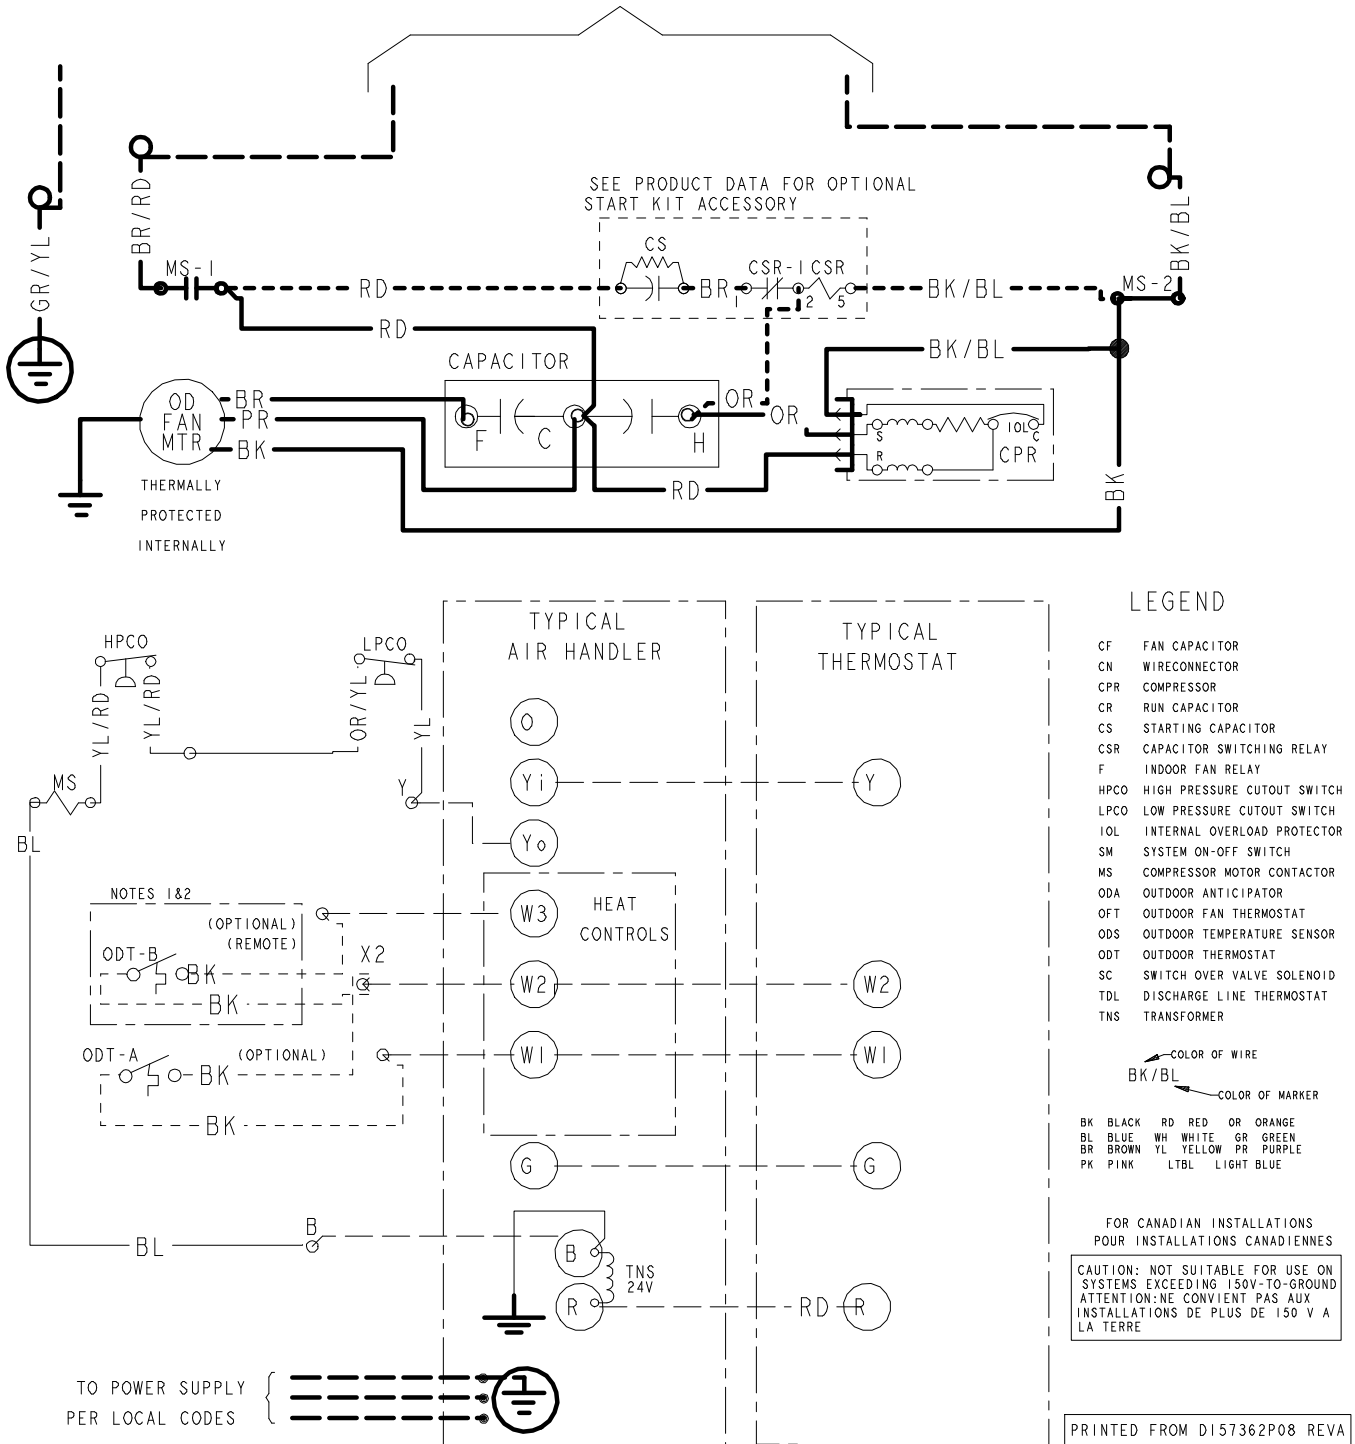

Schematic Diagrams

Figure 8. 018J, 024J, 030J, 036J, 041J, 042J & 048J Models

NOTES:

1. IF ODT-B IS NOT USED. ADD JUMPER BETWEEN W2 & W3 AT AIR HANDLER. IF USED, ODT-B MUST BE MOUNTED REMOTE OF CONTROL BOX IN AN APPROVED WEATHER PROOF ENCLOSURE.
2. IF ODT-A IS NOT USED. ADD JUMPER BETWEEN W1 & W2 AT AIR HANDLER.
3. LOW VOLTAGE (24 V) FIELD WIRING MUST BE 18 AWG MIN.

LEGEND

- 24 V LINE WIRING
- 24 V FIELD WIRING
- FIELD INSTALLED FACTORY WIRING
- MAGNETIC COIL
- GROUND
- JUNCTION
- CAPACITOR
- WIRE NUT OR TERMINAL
- TERMINAL
- TRANSFORMER
- FUSE
- TERMINAL BLOCK/BOARD
- RELAY CONTACT (N.O.)
- RELAY CONTACT (N.C.)
- THERMISTOR
- TEMP ACTUATED SWITCH
- INTERNAL OVERLOAD PROTECTION
- PRESSURE ACTUATED SWITCH
- RESISTOR OR HEATING ELEMENT
- MOTOR WINDING
- POL. PLUG FEMALE HOUSING (MALE TERMINALS)
- POL. PLUG MALE HOUSING (FEMALE TERMINALS)


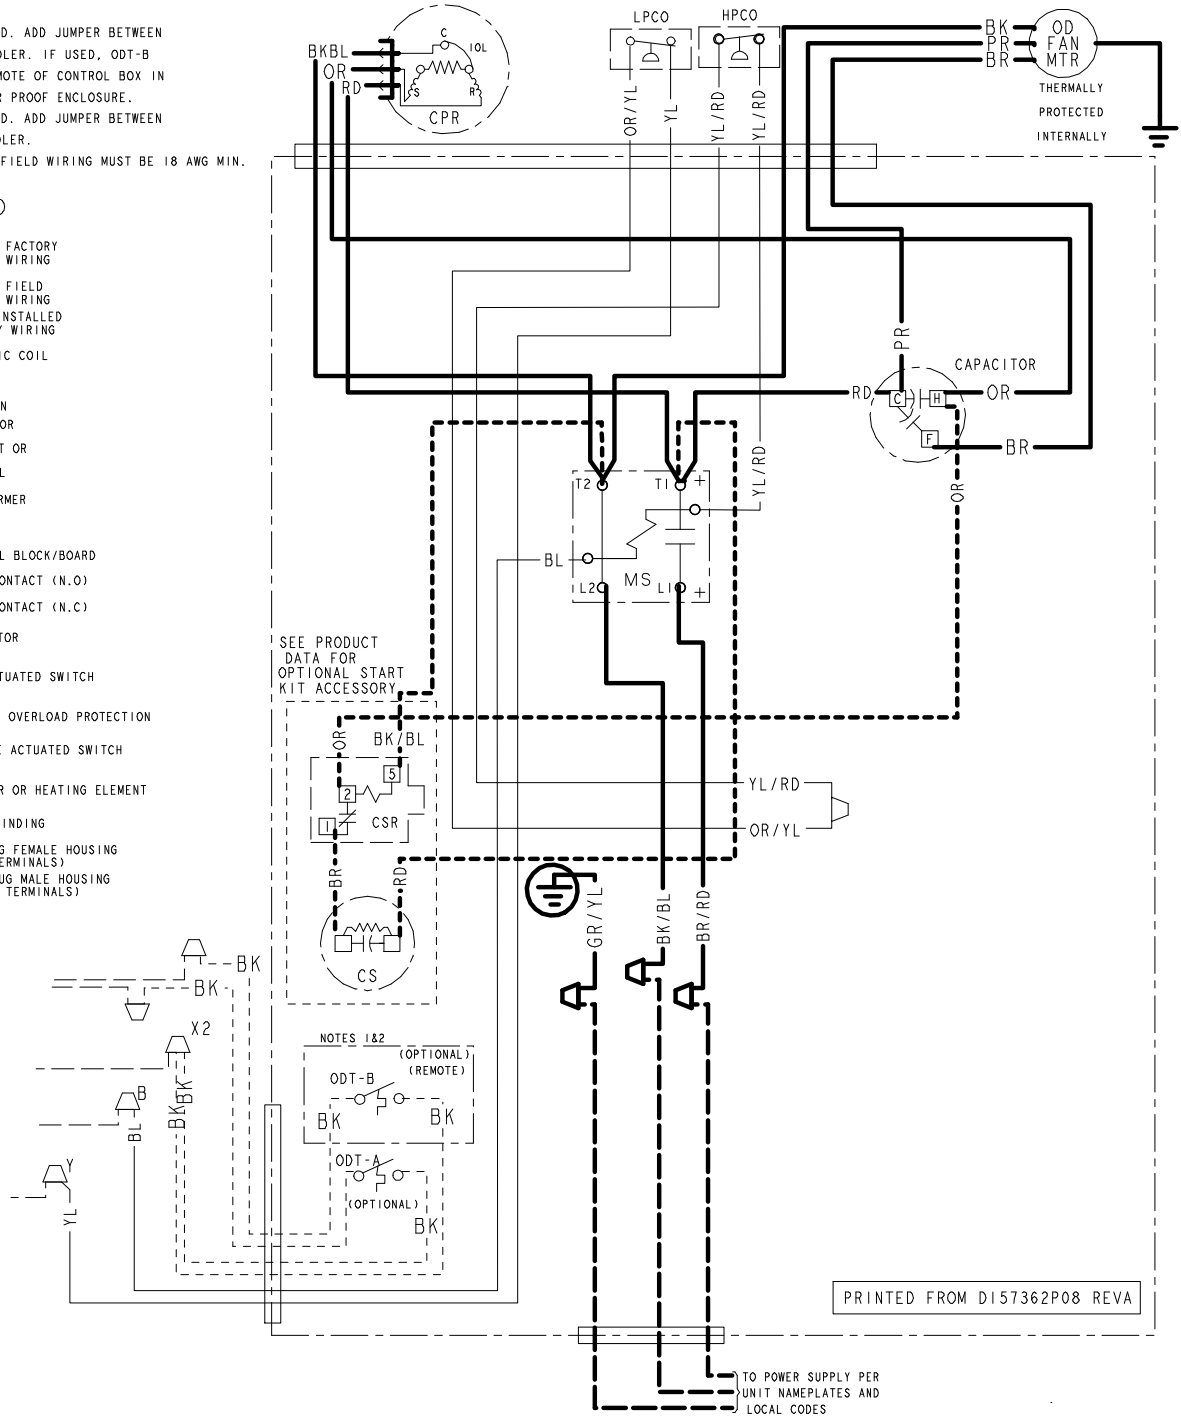


Figure 9. 035J Models

TO POWER SUPPLY PER UNIT NAMEPLATE AND LOCAL CODES

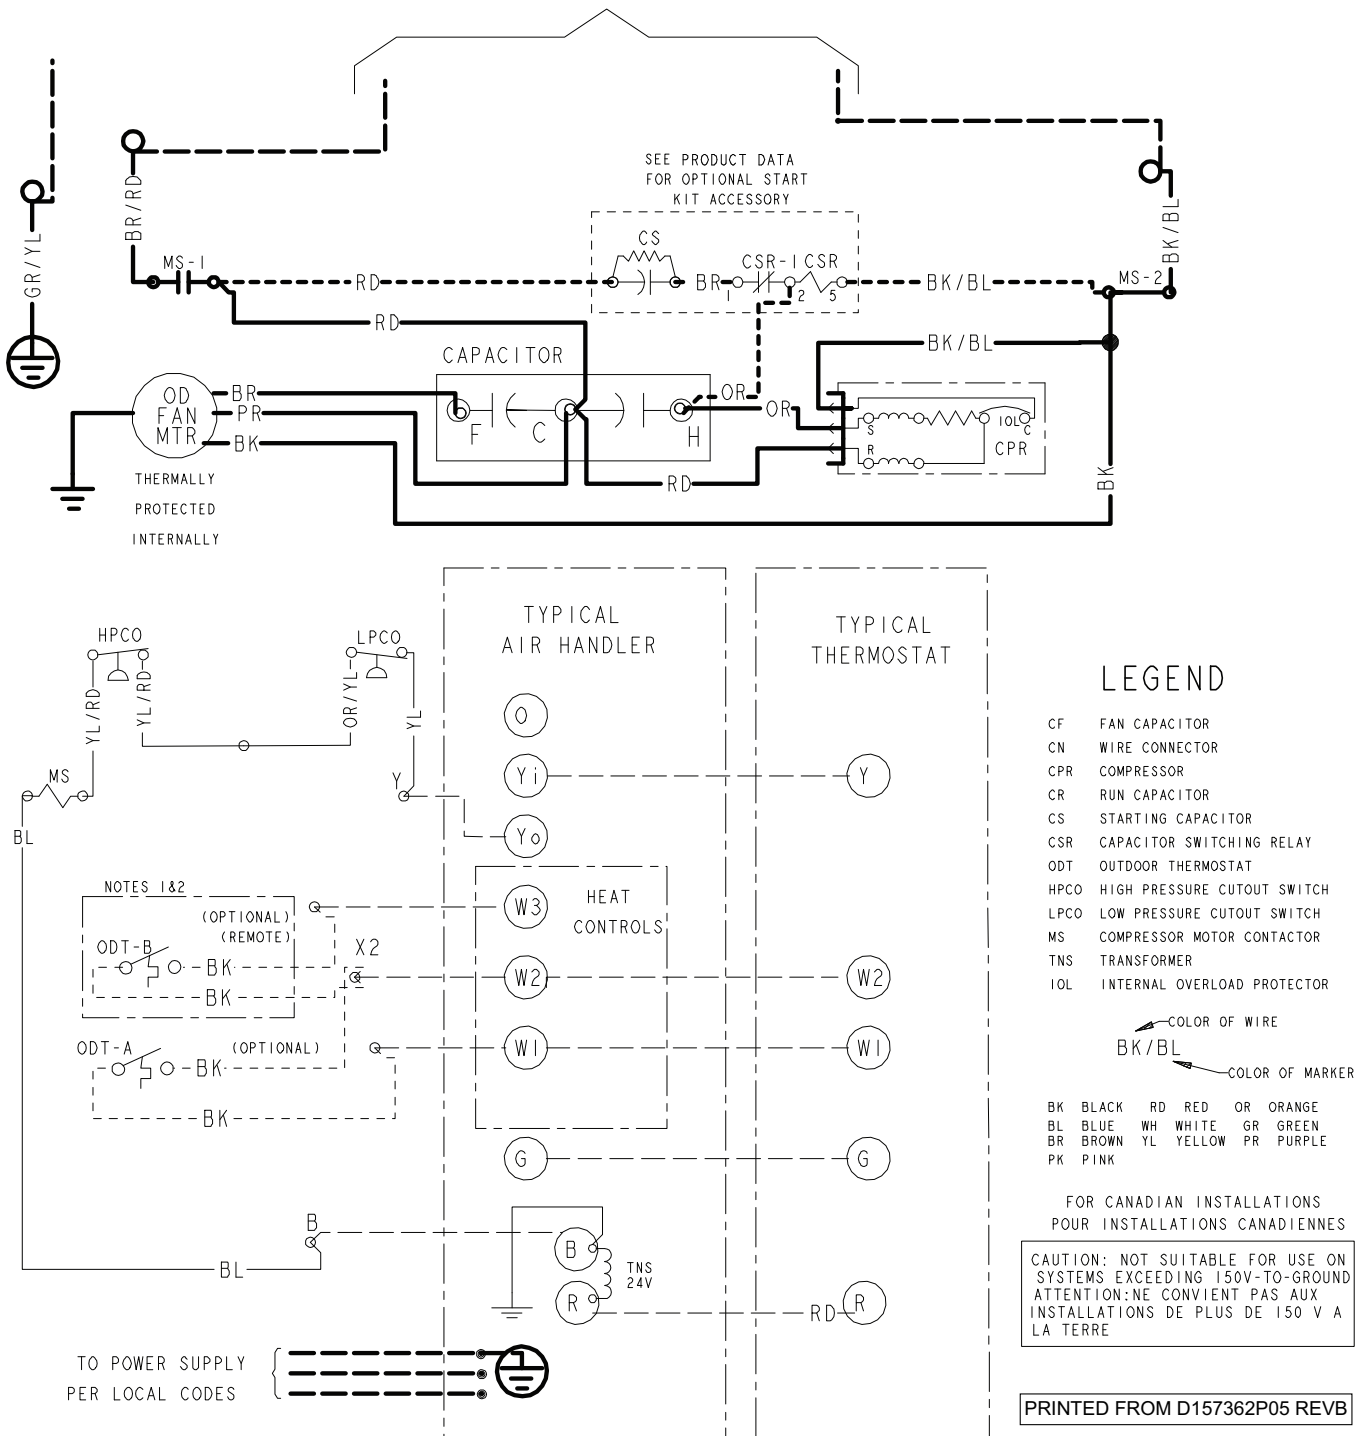

Schematic Diagrams

Figure 10. 035J Models

- NOTES:
1. IF ODT-B IS NOT USED, ADD JUMPER BETWEEN W2 & W3 AT AIR HANDLER. IF USED, ODT-B MUST BE MOUNTED REMOTE OF CONTROL BOX IN AN APPROVED WEATHER PROOF ENCLOSURE.
 2. IF ODT-A IS NOT USED, ADD JUMPER BETWEEN W1 & W2 AT AIR HANDLER.
 3. LOW VOLTAGE (24 V) FIELD WIRING MUST BE 18 AWG MINIMUM.
 4. USE COPPER CONDUCTORS ONLY!

LEGEND

- | | | | |
|--|-------------------------------------|--|---|
| | 24 V FACTORY LINE V WIRING | | RELAY CONTACT (N.O.) |
| | 24 V FIELD INSTALLED FACTORY WIRING | | RELAY CONTACT (N.C.) |
| | MAGNETIC COIL | | THERMISTOR |
| | GROUND | | TEMP ACTUATED SWITCH |
| | JUNCTION | | INTERNAL OVERLOAD PROTECTION |
| | CAPACITOR | | PRESSURE ACTUATED SWITCH |
| | WIRE NUT OR TERMINAL | | RESISTOR OR HEATING ELEMENT |
| | TRANSFORMER | | MOTOR WINDING |
| | TERMINAL BLOCK/BOARD | | POL. PLUG FEMALE HOUSING (MALE TERMINALS) |
| | | | POL. PLUG MALE HOUSING (FEMALE TERMINALS) |



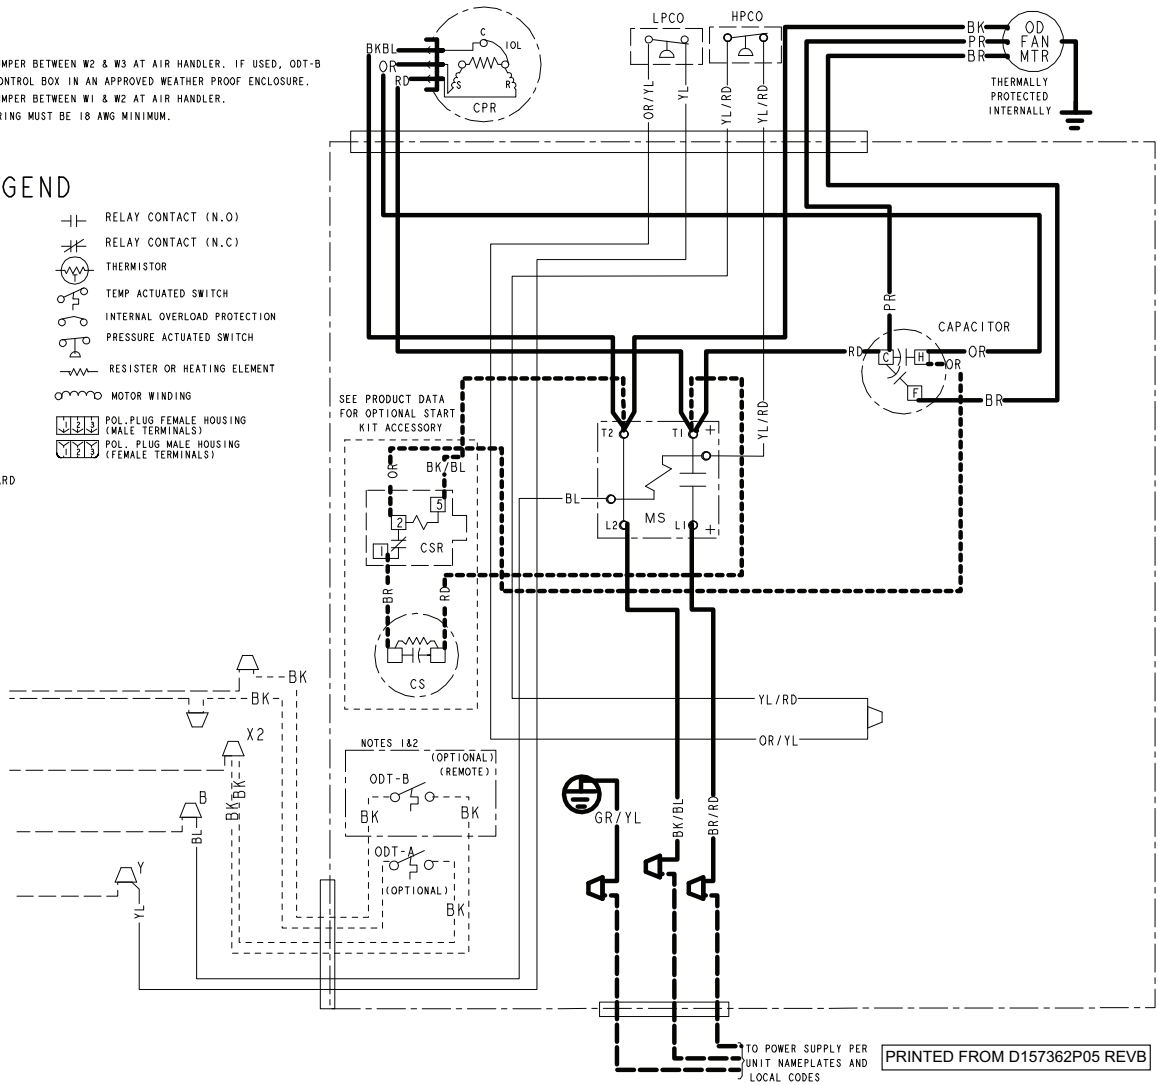


Figure 11. 049J & 061C Models

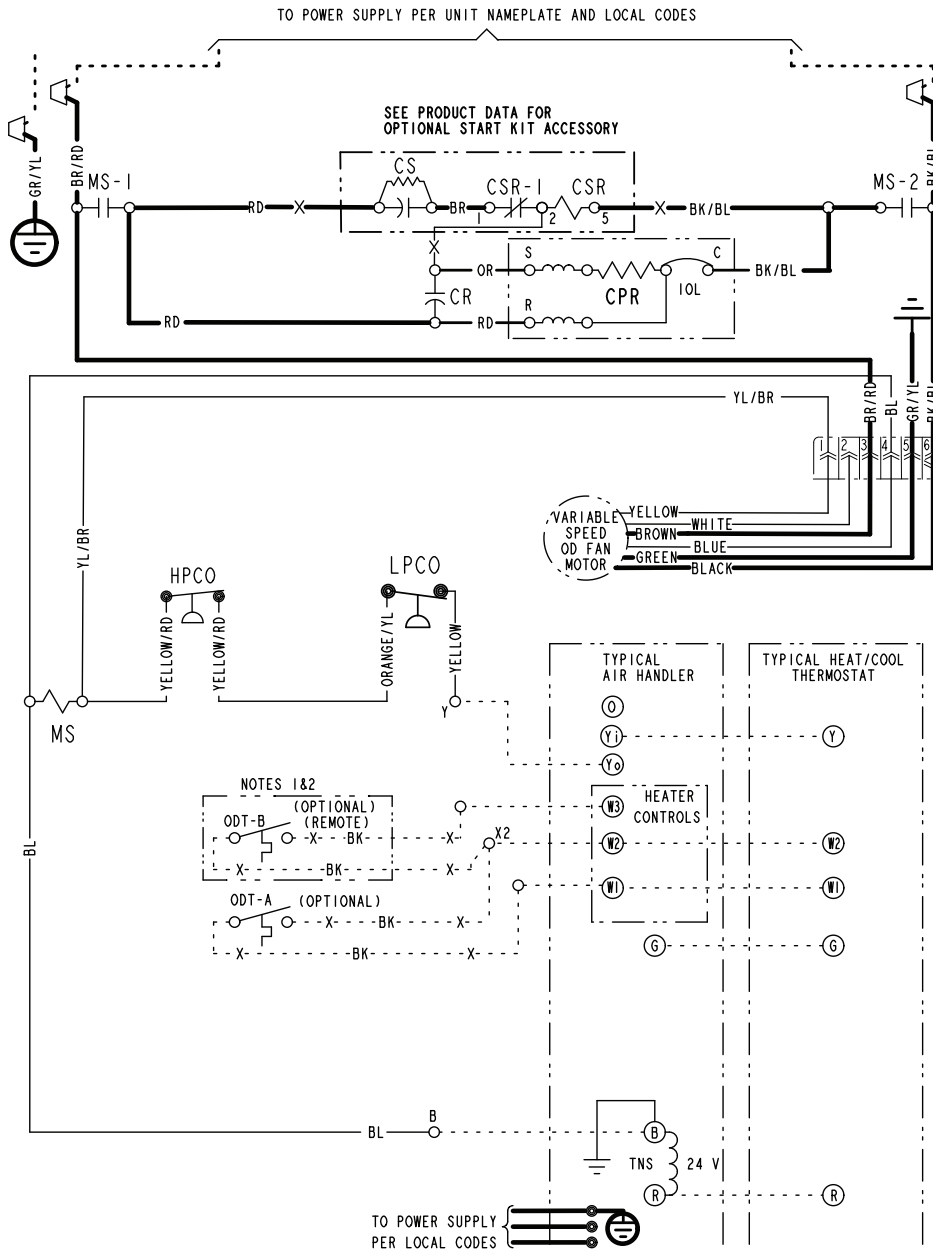

PRINTED FROM DI58442P02 REVA

Figure 13. 060J & 060K Models

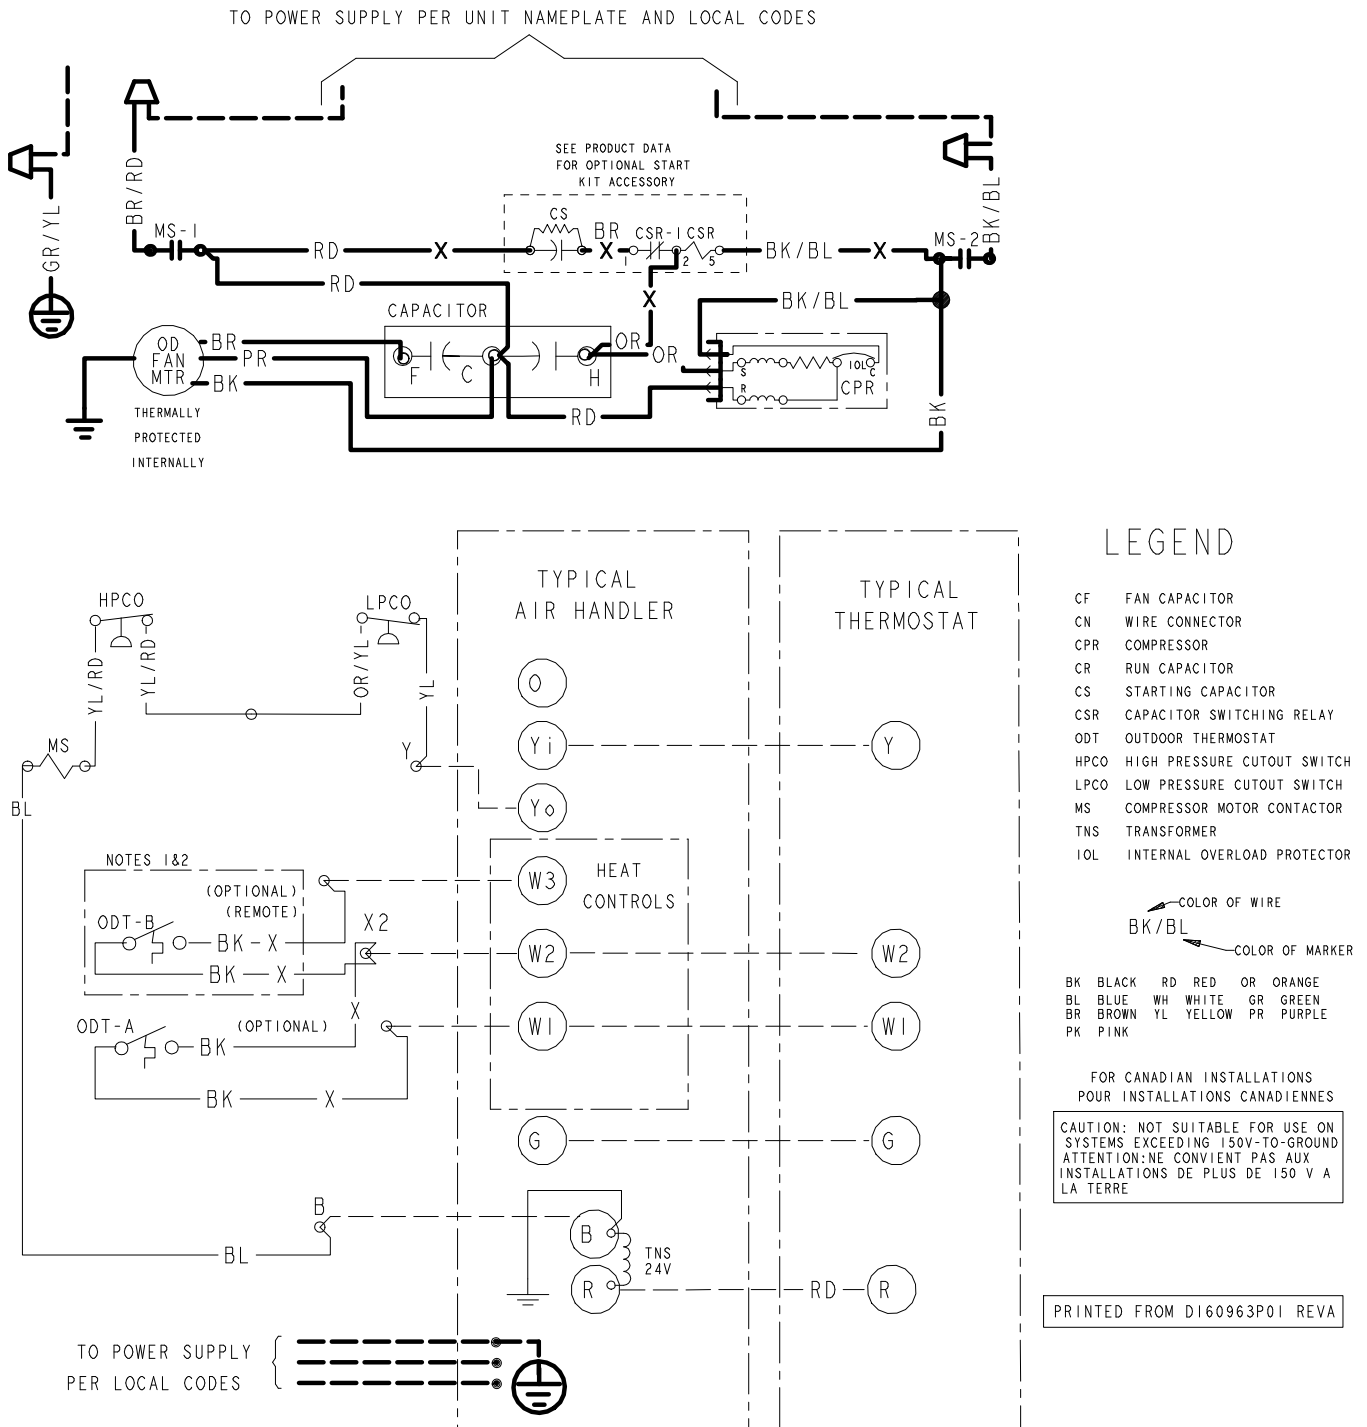

Schematic Diagrams


Figure 14. 060J & 060K Models

NOTES:


1. IF ODT-B IS NOT USED. ADD JUMPER BETWEEN W2 & W3 AT AIR HANDLER.
IF USED, ODT-B MUST BE MOUNTED REMOTE OF CONTROL BOX IN AN APPROVED WEATHER PROOF ENCLOSURE.
2. IF ODT-A IS NOT USED. ADD JUMPER BETWEEN W1 & W2 AT AIR HANDLER.
3. LOW VOLTAGE (24 V) FIELD WIRING MUST BE 18 AWG MINIMUM.
4. USE COPPER CONDUCTORS ONLY!

LEGEND


- 24 V } FACTORY WIRING
- 24 V } FIELD WIRING
- X- 24 V } FIELD INSTALLED
- X- 24 V } FACTORY WIRING
- ∩ MAGNETIC COIL
- ⊥ GROUND
- JUNCTION
- ⊢ CAPACITOR
- ⊢ WIRE NUT OR CONNECTOR
- TERMINAL
- ⊞ TRANSFORMER
- TERMINAL BLOCK/BOARD
- ⊢ RELAY CONTACT (N.O.)
- ⊢ RELAY CONTACT (N.C.)
- ⊞ THERMISTOR
- ⊞ TEMP ACTUATED SWITCH
- ⊞ INTERNAL OVERLOAD PROTECTION
- ⊞ PRESSURE ACTUATED SWITCH
- ⊞ RESISTOR OR HEATING ELEMENT
- ⊞ MOTOR WINDING
- ⊞ POL. PLUG FEMALE HOUSING (MALE TERMINALS)
- ⊞ POL. PLUG MALE HOUSING (FEMALE TERMINALS)

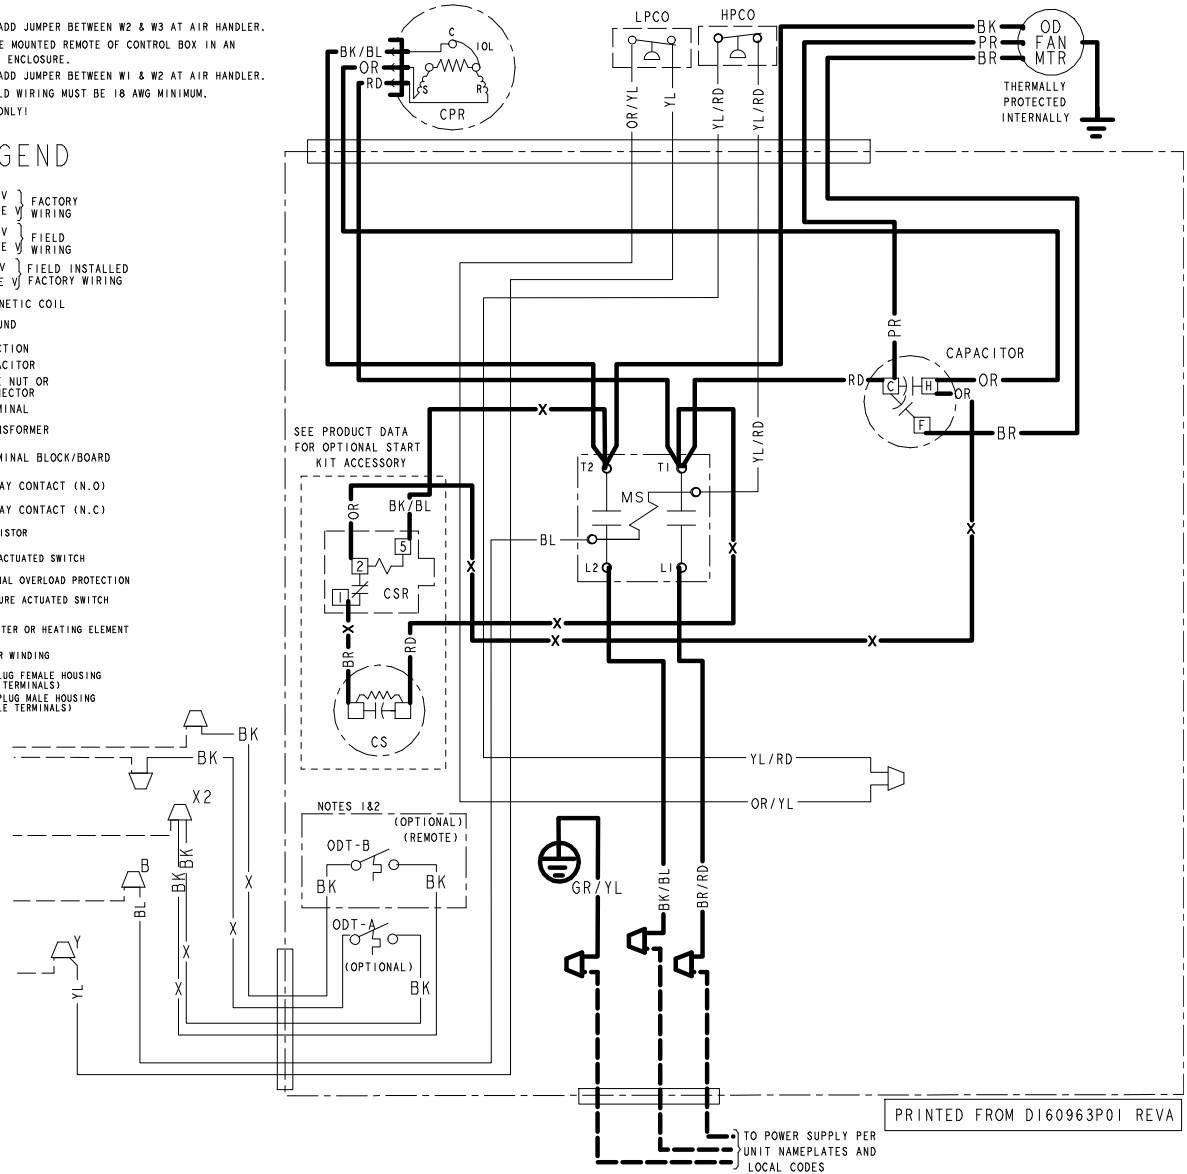

Outline Drawing

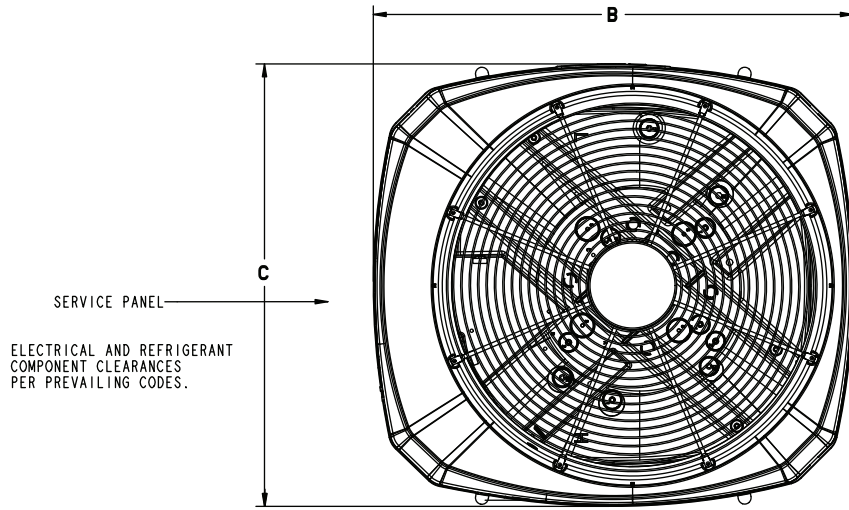

TOP DISCHARGE AREA SHOULD BE UNRESTRICTED FOR AT LEAST 1524 (5 FEET) ABOVE UNIT. UNIT SHOULD BE PLACED SO ROOF RUN-OFF WATER DOES NOT POUR DIRECTLY ON UNIT, AND SHOULD BE AT LEAST 305 (12") FROM WALL AND ALL SURROUNDING SHRUBBERY ON TWO SIDES. OTHER TWO SIDES UNRESTRICTED.

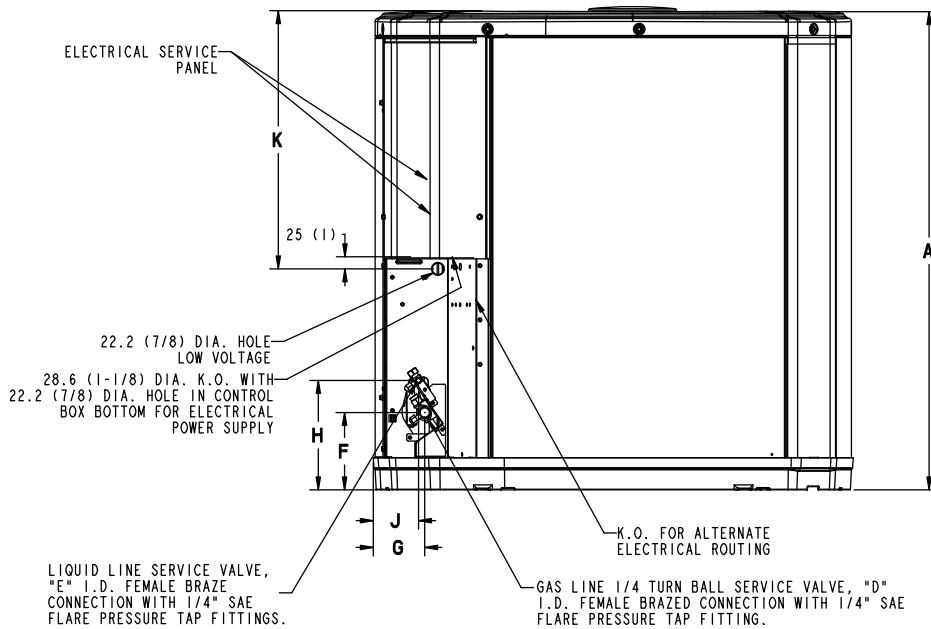

| Model | Base | A | B | C | D | E | F | G | H | J | K |
|-----------|------|------------------|-----------------|-----------------|-------|-----|------------|---------------|----------------|---------------|-------------|
| 4A7A6024N | 4 | 1045 (41-1/8) | 946 (37-1/4) | 870 (34-1/4) | 3/4 | 3/8 | 152 (6) | 98 (3-7/8) | 219 (8-5/8) | 86 (3-3/8) | 711 (28) |
| 4A7A6036N | 4 | 1147 (45-1/8) | 946 (37-1/4) | 870 (34-1/4) | 3/4 | 3/8 | 152 (6) | 98 (3-7/8) | 219 (8-5/8) | 86 (3-3/8) | 813 (32) |
| 4A7A6048N | 4 | 1147 (45-1/8) | 946 (37-1/4) | 870 (34-1/4) | 7/8 | 3/8 | 152 (6) | 98 (3-7/8) | 219 (8-5/8) | 86 (3-3/8) | 813 (32) |
| 4A7A6060N | 4 | 1147 (45-1/8) | 946 (37-1/4) | 870 (34-1/4) | 1-1/8 | 3/8 | 152 (6) | 98 (3-7/8) | 219 (8-5/8) | 86 (3-3/8) | 813 (32) |

Outline Drawing

| Model | Base | A | B | C | D | E | F | G | H | J | K |
|--------------|-------------|------------------|-----------------|-----------------|----------|----------|----------------|---------------|----------------|---------------|-------------|
| 4A7A6018J | 3 | 730 (28-3/4) | 829 (32-5/8) | 756 (29-3/4) | 3/4 | 3/8 | 127 (5) | 76 (3) | 197 (7-3/4) | 60 (2-3/8) | 508 (20) |
| 4A7A6024J | 3 | 730 (28-3/4) | 829 (32-5/8) | 756 (29-3/4) | 3/4 | 3/8 | 127 (5) | 76 (3) | 197 (7-3/4) | 60 (2-3/8) | 508 (20) |
| 4A7A6030J | 3 | 933 (36-3/4) | 829 (32-5/8) | 756 (29-3/4) | 3/4 | 3/8 | 143 (5-5/8) | 92 (3-5/8) | 210 (8-1/4) | 79 (3-1/8) | 508 (20) |
| 4A7A6035J | 3 | 832 (32-3/4) | 829 (32-5/8) | 756 (29-3/4) | 3/4 | 3/8 | 127 (5) | 76 (3) | 197 (7-3/4) | 60 (2-3/8) | 508 (20) |
| 4A7A6036J | 4 | 943 (37-1/8) | 946 (37-1/4) | 870 (34-1/4) | 3/4 | 3/8 | 143 (5-5/8) | 98 (3-7/8) | 219 (8-5/8) | 86 (3-3/8) | 508 (20) |
| 4A7A6041J | 4 | 943 (37-1/8) | 946 (37-1/4) | 870 (34-1/4) | 3/4 | 3/8 | 143 (5-5/8) | 98 (3-7/8) | 219 (8-5/8) | 86 (3-3/8) | 508 (20) |
| 4A7A6042J | 4 | 1147 (45-1/8) | 946 (37-1/4) | 870 (34-1/4) | 7/8 | 3/8 | 152 (6) | 98 (3-7/8) | 219 (8-5/8) | 86 (3-3/8) | 813 (32) |
| 4A7A6048J | 4 | 1147 (45-1/8) | 946 (37-1/4) | 870 (34-1/4) | 7/8 | 3/8 | 152 (6) | 98 (3-7/8) | 219 (8-5/8) | 86 (3-3/8) | 813 (32) |
| 4A7A6049J | 4 | 1147 (45-1/8) | 946 (37-1/4) | 870 (34-1/4) | 7/8 | 3/8 | 152 (6) | 98 (3-7/8) | 219 (8-5/8) | 86 (3-3/8) | 813 (32) |
| 4A7A6060J | 4 | 1147 (45-1/8) | 946 (37-1/4) | 870 (34-1/4) | 7/8 | 3/8 | 152 (6) | 98 (3-7/8) | 219 (8-5/8) | 86 (3-3/8) | 813 (32) |
| 4A7A6060K | 4 | 1147 (45-1/8) | 946 (37-1/4) | 870 (34-1/4) | 7/8 | 3/8 | 152 (6) | 98 (3-7/8) | 219 (8-5/8) | 86 (3-3/8) | 813 (32) |
| 4A7A6061C | 4 | 1147 (45-1/8) | 946 (37-1/4) | 870 (34-1/4) | 7/8 | 3/8 | 152 (6) | 98 (3-7/8) | 219 (8-5/8) | 86 (3-3/8) | 813 (32) |

Mechanical Specification Options

General

The outdoor condensing units are factory charged with the system charge required for the outdoor condensing unit, ten (10) feet of tested connecting line, and the smallest rated indoor evaporative coil match. This unit is designed to operate at outdoor ambient temperatures as high as 115°F. Cooling capacities are matched with a wide selection of air handlers and furnace coils that are AHRI certified. The unit is certified to UL 1995. Exterior is designed for outdoor application.

Casing

Unit casing is constructed of heavy gauge, galvanized steel and painted with a weather-resistant powder paint finish. The corner panels are prepainted. All panels are subjected to our 1,000 hour salt spray test.

Refrigerant Controls

Refrigeration system controls include condenser fan, compressor contactor and low and high pressure switches. A factory supplied, field installed liquid line drier is standard.

Compressor

The compressor features internal over temperature and pressure protection. Other features include: Centrifugal oil pump and low vibration and noise.

Condenser Coil

The outdoor coil provides low airflow resistance and efficient heat transfer. The coil is protected on all four sides by louvered panels.

Low Ambient Cooling

As manufactured, this system has a cooling capacity to 55°F. The addition of an evaporator defrost control permits operation to 40°F. The addition of an evaporator defrost control with TXV permits low ambient cooling to 30°F.

The addition of the BAYLOAM107A low ambient kit permits ambient cooling to 20°F.

Thermostats – Cooling only and heat/cooling (manual and automatic change over). Sub-base to match thermostat and locking thermostat cover.

American Standard[®]
HEATING & AIR CONDITIONING

About American Standard Heating and Air Conditioning
American Standard has been creating comfortable and affordable living environments for more than a century. For more information, please visit www.americanstandardair.com.



The AHRI Certified mark indicates company participation in the AHRI Certification program. For verification of individual certified products, go to ahridirectory.org.

The manufacturer has a policy of continuous data improvement and it reserves the right to change design and specifications without notice. We are committed to using environmentally conscious print practices.

12-1376-1M-EN 05 Aug 2022
Supersedes 12-1376-1L-EN (January 2022)

©2022 American Standard Heating and Air Conditioning