Nv-Series and P-Series Catalog



Spring 2020

















Doing Our Part to Create a Better Future for All...

Core Environmental Policy

The Mitsubishi Electric Group promotes sustainable development and is committed to protecting and restoring the global environment through technology, all business activities and the actions of our employees.



Mitsubishi Electric reflects the essence of this policy and vision in all aspects of its air conditioner business.

Preventing Global Warming

Heat pump technology inspires Mitsubishi Electric to design air conditioners that combine comfort and ecology.

Refrigerant and Heat Circulation

3,600 BTU/H
Electrical
Energy Input

Compressor
compresses the refrigerant which raises the temperature

176° F

Outdoors

14,400 BTU/H
Heat absorbed from the air

Expansion valve expands refrigerant to lower the temperature

Mitsubishi Electric develops technologies to balance comfort and ecology, achieving greater efficiency in heat pump operation.

	Comfort	Ecology				
1. Inverter	Faster start-up and more stable indoor temperature than non-inverter units.	Fewer On/Off operations than with non-inverter saving energy.				
2. 3D i-see Sensor®	Since the position of people can be detected, airflow can be set to personal selection, such as direct airflow path. The ability to adjust to individual preferences results in more comfortable air conditioning.	Since the number of people in a room can be detected, energy-saving operation is adjusted or the power is turned off automatically. Efficient air conditioning with less waste is realized.				
3. Flash Injection	Achieves high heating capacity even at low temperatures plus faster start-up compared to conventional inverters.	Expands the geographical region covered by heat pump heating systems.				
T. B. / S. S. S. S. L. S.						












CONTENTS


Product Line-Up	6-11
Quality and Testing	12-13
Inverter Technologies	14-15
Features	16-29
Nv-Series	30-69
P-Series	70-107
Nv-Series Multi-zone Outdoor Units	108-115
Conditions for Specifications	116
Piping Installation	117-120
Explanation of Terminology	121
Installation In Cold Regions	122-123
System Control	124-127
Optional Parts	128-147
Additional Information	148-155
Correction Factors	156-159
External Dimensions	160-171

Nv-Series Model Reference Guide

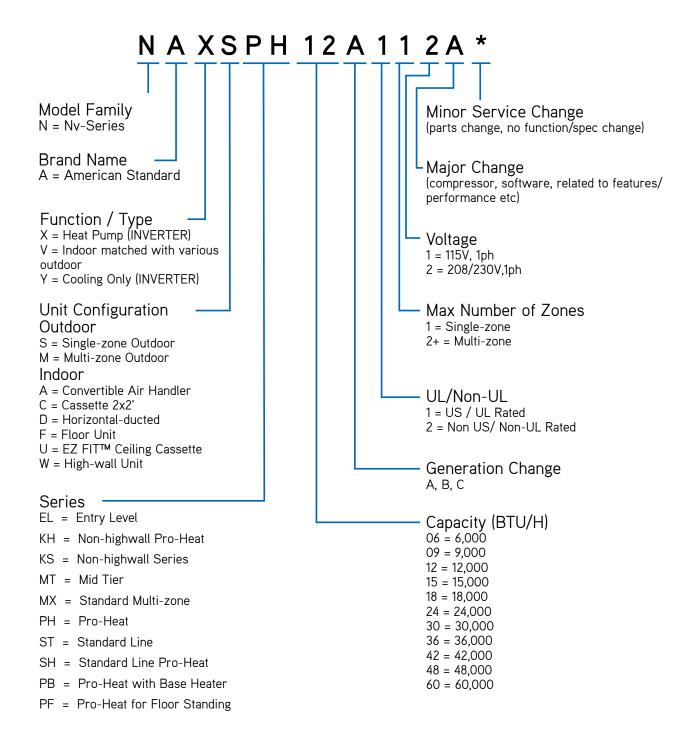

- Designed for residential applications
- User-friendly zoned cooling and heating solutions for single- or multi-room applications or the whole home
- Pro-Heat INVERTER-driven outdoor units can provide high heating performance at lower ambient temperatures
- Many ENERGY STAR® certified models

P-Series Model Reference Guide

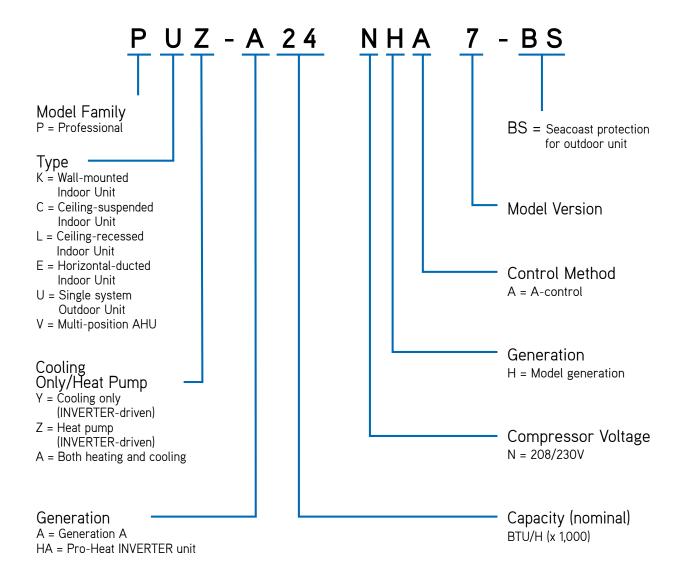

- Designed for light commercial installations. Ideal for applications requiring year-round, low ambient cooling such as computer, elevator and equipment rooms
- Pro-Heat outdoor units can provide superior heating performance at lower ambient temperatures
- Long lineset lengths
- Outside air intake on PLA, PCA, PEAD and PVA models
- P-Series ducted units have higher static than most Nv-Series, allowing for design flexibility

Nv-Series

	Model Name	6,000 BTU/H	9,000 BTU/H	12,000 BTU/H	15,000 BTU/H	18,000 BTU/H	24,000 BTU/H	30,000 BTU/H	36,000 BTU/H
	NAXWPH Model	•	•	•	•	•			
	MSZ-EF Model		W·S·B *1	W·S·B *1	W·S·B *1	W·S·B *1			
	NAXWST Model	• *1	•	•	•	•	•	•	•
Wall Mounted	NAXWMT Model		• *2	•*2	*2	*2	• *2		
	NAXWMT 115V Model		*2	*2					
	NAXWEL Model		*2	*2		*2	*2		
	NAYWST Model COOLING ONLY		*2	*2	*2	*2	•	• *2	*2
Floor Mounted	NAXFKS Model		•	•	•	•			
EZ FIT™ Ceiling Cassette	NAXUKS Model		•	•		•			
Multi-position Air Handler	NAXAMT Model			•		•	•	•	•
Ceiling Cassette	NAXCKS Model		•	•	•	• *2			
Horizontal Ducted	NAXDKS Model		•	•	•	•			

^{*1} MX connection only
*2 Single-zone connection only

MX Model

	Model Name	Capacity	Wall Mounted	Floor Mounted	EZ FIT™ Ceiling Cassette	4-way Ceiling Cassette	Horizontal Ducted	Multi-position Air Handler	Ceiling Suspended
	NAXMMX20A122** up to 2 indoor units	20,000 BTU/H [1-phase]	WPH 06/09/12/15 MSZ-EF 09/12/15 NAXWST 06/09/12/15	FKS 09/12/15	UKS 09/12	CKS 09/12	DKS 09/12/15 PEAD-A12	AMT 12	
	NAXMMX24A132** up to 3 indoor units	24,000 BTU/H [1-phase]	WPH 06/09/12/15/18 MSZ-EF 09/12/15/18 NAX- WST06/09/12/15/18	FKS 09/12/ 15/18	UKS 09/12/18	CKS 09/12/15 PLA-A18	DKS 09/12/15/18 PEAD-A12/18	AMT 12/18	
	NAXMMX30A132** up to 3 indoor units	30,000 BTU/H [1-phase]	WPH 06/09/12/15/18 MSZ-EF 09/12/15/18 NAXWST 06/09/12/15/18/24	FKS 09/12/ 15/18	UKS 09/12/18	CKS 09/12/15 PLA-A18	DKS 09/12/15/18 PEAD-A12/18/24	AMT 12/18/24	PCA-A24
Heat Pump		36,000 BTU/H [1-phase]	WPH 06/09/12/15/18 MSZ-EF 09/12/15/18 NAXWST 06/09/12/15/18/24	FKS 09/12/ 15/18	UKS 09/12/18	CKS 09/12/15 PLA-A18	DKS 09/12/15/18 PEAD-A12/18/24	AMT 12/18/ 24/30/36	PCA-A24
	NAXMMX42A152** up to 5 indoor units	42,000 BTU/H [1-phase]	WPH 06/09/12/15/18 MSZ-EF 09/12/15/18 NAXWST 06/09/12/15/18/24	FKS 09/12/ 15/18	UKS 09/12/18	CKS 09/12/15 PLA-A18	DKS 09/12/15/18 PEAD-A12/18/24	AMT 12/18/ 24/30/36	PCA-A24
	NAXMMX48A182** *3 up to 8 indoor units	48,000 BTU/H [1-phase] WPH 06/09/12/15/18 MSZ-EF 09/12/15/18 NAXWST 06/09/12/15/18/2		FKS 09/12/ 15/18	UKS 09/12/18	CKS 09/12/15 PLA-A 12/18/24/30/36	DKS 09/12/15/18 PEAD-A 12/18/24/30/36	AMT 12/18/ 24/30/36	
	NAXMMX60A182***3 up to 8 indoor units	60,000 BTU/H [1-phase]	WPH 06/09/12/15/18 MSZ-EF 09/12/15/18 NAXWST 06/09/12/15/18/24	FKS 09/12/ 15/18	UKS 09/12/18	CKS 09/12/15 PLA-A 12/18/24/30/36	DKS 09/12/15/18 PEAD-A 12/18/24/30/36	AMT 12/18/ 24/30/36	
	NAXMPH20A122** up to 2 indoor units	20,000 BTU/H [1-phase]	WPH 06/09/12/15 MSZ-EF 09/12/15 NAXWST 06/09/12/15	FKS 09/12/15	UKS 09/12	CKS 09/12	DKS 09/12/15 PEAD-A12	AMT1 2	
	NAXMPH24A132** up to 3 indoor units	24,000 BTU/H [1-phase]	WPH 06/09/12/15/18 MSZ-EF 09/12/15/18 NAXWST 06/09/12/15/18	FKS 09/12/15/18	UKS 09/12/18	CKS 09/12/15 PLA-A18	DKS 09/12/15/18 PEAD-A12/18	AMT 12/18	
Pro-Heat Pro-Heat	NAXMPH30A132** up to 3 indoor units	30,000 BTU/H [1-phase]	WPH 06/09/12/15/18 MSZ-EF 09/12/15/18 NAXWST 06/09/12/15/18/24	FKS 09/12/15/18	UKS 09/12/18	CKS 09/12/15 PLA-A18	DKS 09/12/15/18 PEAD-A12/18/24	AMT 12/18/24	PCA-A24
Pro-	NAXMPH36A142** *3 up to 4 indoor units	36,000 BTU/H [1-phase]	WPH 06/09/12/15/18 MSZ-EF 09/12/15/18 NAXWST 06/09/12/15/18/24	FKS 09/12/15/1	UKS 09/12/18	CKS 09/12/15 PLA-A12/18/ 24/30/36	DKS 09/12/15/18 PEAD-A12/18/ 24/30/36	AMT 12/18/24/30/36	
	NAXMPH42A152** *3 up to 5 indoor units	42,000 BTU/H [1-phase]	WPH 06/09/12/15/18 MSZ-EF 09/12/15/18 NAXWST 06/09/12/15/18/24	FKS 09/12/15/18	UKS 09/12/18	CKS 09/12/15 PLA-A12/18/ 24/30/36	DKS 09/12/15/18 PEAD-A12/18/ 24/30/36	AMT 12/18/24/30/36	
	NAXMMX48A182** *3 up to 8 indoor units	48,000 BTU/H [1-phase]	WPH 06/09/12/15/18 MSZ-EF 09/12/15/18 NAXWST 06/09/12/15/18/24	FKS 09/12/15/18	UKS 09/12/18	CKS 09/12/15 PLA-A12/18/ 24/30/36	DKS 09/12/15/18 PEAD-A12/18/ 24/30/36	AMT 12/18/24/30/36	

^{*3} The number of indoor units are limited when connected to PLA. For more information, please refer to pg.85-86
The number of ducted models (AMT, DKS, PEAD) connectable may be limited based on the outdoor unit and combination - refer to the compatibility charts.

P-Series

COOLING ONLY Models (PUY)

Model Name		12,000 BTU/H	18,000 BTU/H	24,000 BTU/H	30,000 BTU/H	36,000 BTU/H	42,000 BTU/H
4-way Ceiling Cassette	PLA Model	•	•	•	•	•	•
Wall Mount	PKA Model	•	•	•	•	•	
Multi-position Air Handler	PVA Model	•	•	•	•	•	•
Horizontal Ducted	PEAD Model	•	•	•	•	•	•
Ceiling-suspended	PCA Model			•	•	•	•

HEAT PUMP Models (PUZ)

HEAT PUMP Models (PUZ)											
Model Name		12,000 BTU/H	18,000 BTU/H	24,000 BTU/H	30,000 BTU/H	36,000 BTU/H	42,000 BTU/H				
4-way Ceiling Cassette	PLA Model	•	•	•	•	•	•				
Wall Mount	PKA Model	•	•	•	•	•					
Multi-position Air Handler	PVA Model	•	•	•	•	•	•				
Horizontal Ducted	PEAD Model	•	•	•	•	•	•				
Ceiling-suspended	PCA Model			•	•	•	•				

PRO-HEAT Models (PUZ-HA)

Model Name		24,000 BTU/H	30,000 BTU/H	36,000 BTU/H	42,000 BTU/H
4-way Ceiling Cassette	PLA Model	•	•	•	•
Wall Mount	PKA Model	•	•	•	
Multi-position Air Handler	PVA Model	•	•	•	•
Horizontal Ducted	PEAD Model	•	•	•	•
Ceiling-suspended	PCA Model	•	•	•	•

QUALITY AND TESTING

Quality First. Always.

Cutting-edge technologies and uncompromising commitment to quality and reliability have made us one of the world's most trusted brands in air-conditioning and refrigeration equipment and service.

DEVELOPMENT

Operating Tests in Harsh Conditions

Harsh environmental conditions of cold regions are simulated for the development of our air conditioners. This is another reason customers in severely cold regions rely on us for comfortable heating.





Combustion Test

Products are subjected to a wide range of tests including combustion testing, all to confirm safe operation under a variety of conditions. Combustion testing is done by assuming accidental firing and replicating abnormal conditions that cause breakage of pressure components.



Explosion-proof chamber

Shock Resistance

On the assumption of many different kinds of logistics environments in the world,we perform drop/strength tests, transport vibration tests, and many other product checks to assure that the quality and performance are maintained when the product reaches the user's home.



Drop/strength testing



Transport vibration testing

Waterproof and Corrosion Test

Since the outdoor unit is subject to rain, wind, and corrosive substances, potential problems are checked by tests such as showering the unit for a certain amount of time and increasing protection to enhance the lifespan of the unit.



Operation Noise Test

Operation noise tests are performed in an anechoic chamber with an extremely low 10dB(A) of background noise. This is just one of the ways we ensure our customers enjoy extremely quiet air conditioners with a minimum operation noise of 19dB(A) (sound pressure level).



Anechoic chamber

DESIGN

Designed to create and maintain a comfortable environment

To improve the quality of products, engineers strive to achieve our philosophy of combining comfort and ecology in an effort to continually raise the bar. Therefore, we are working to further improve quality at all stages from development to production.



PRODUCTION

Each and every unit is checked and double-checked by experienced professionals

Every air conditioner goes through a rigorous electrical inspection on the manufacturing line. In final testing, our experienced inspectors listen for even the faintest operation noise to detect any defect.





INVERTER TECHNOLOGIES

Our Promise: Mitsubishi Electric inverters ensure superior performance including the optimum control of operation frequency. As a result, optimum power is applied in all heating/cooling ranges and maximum comfort is achieved while consuming minimal energy. Fast, comfortable operation and amazingly low running cost — that's the Mitsubishi Electric promise.

INVERTERS - HOW THEY WORK

Inverters electronically control the electrical voltage, current and frequency of electrical devices such as the compressor motor in an air conditioner. They receive information from sensors monitoring operating conditions, and adjust the revolution speed of the compressor, which directly regulates air conditioner output. Optimum control of operation frequency results in eliminating the consumption of excessive electricity and providing the most comfortable room environment.


FCONOMIC OPERATION


Impressively low operating cost is a key advantage of inverter air conditioners. We've combined advanced inverter technologies with cutting-edge electronics and mechanical technologies to achieve a synergistic effect that enables improvements in heating/cooling performance efficiency. Better performance and lower energy consumption are the result.

TRUE COMFORT

Below is a comparison of air conditioner operation control with and without an inverter.

■ Inverter operation comparison

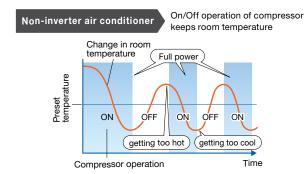

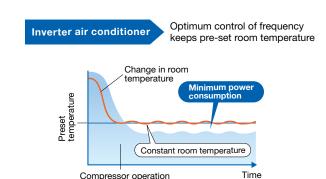

The compressors of air conditioners without an inverter start and stop repeatedly in order to maintain the pre-set room temperature. This repetitive on/off operation uses excessive electricity and compromises room comfort. The compressors of air conditioners equipped with an inverter run continuously; the inverter quickly optimizing the operating frequency according to changes in room temperature. This ensures energy-efficient operation and a more comfortable room.

POINT 1 Quick & Powerful

Increasing the compressor motor speed by controlling the operation frequency ensures powerful output at start-up, brings the room temperature to the comfort zone faster than units not equipped with an inverter. Hot rooms are cooled, and cold rooms are heated faster and more efficiently.

POINT 2 Room Temperature Maintained

The compressor motor operating frequency and the change of room temperature are monitored to calculate the most efficient waveform to maintain the room temperature in the comfort zone. This eliminates the large temperature swings common with non-inverter systems, and guarantees a pleasant, comfortable environment.

KEY TECHNOLOGIES

Our Rotary Compressor

Our rotary compressors use our original Poki-Poki Motor and Heat Caulking Fixing Method to realize downsizing and higher efficiency, and are designed to match various usage scenes in residential and commercial applications. Additionally, development of an innovative production method known as "Divisible Middle Plate" realizes further size/weight reductions and increased capacity while also answering energy-efficiency needs.

Our Scroll Compressor

Our scroll compressors are equipped with an advanced frame compliance mechanism that allows self-adjustment of the position of the orbiting scroll according to pressure load and the accuracy of the fixed scroll position. This minimizes gas leakage in the scroll compression chamber, maintains cooling capacity and reduces power loss.

MORE ADVANTAGES WITH OUR PRODUCTS



🏁 Joint Lap DC Motor

Mitsubishi Electric has developed a unique motor, called the Poki-Poki Motor in Japan, which is manufactured using a joint lapping technique. This innovative motor operates based on a high-density, high-magnetic force, leading to extremely high efficiency and reliability.








Magnetic Flux Vector Sine Wave Drive

This drive device is actually a microprocessor that converts the compressor motor's electrical current waveform from a conventional waveform to a sine wave (180° conductance) to achieve higher efficiency by raising the motor winding utilization ratio and reducing energy loss.




Reluctance DC Rotary Compressor

Powerful neodymium magnets are used in the rotor of the reluctance DC motor. More efficient operation is realized by strong magnetic and reluctance torques produced by the magnets.



Highly Efficient DC Scroll Compressor

Higher efficiency has been achieved by adding a frame compliance mechanism to the DC scroll compressor. The mechanism allows movement in the axial direction of the frame supporting the cradle scroll, thereby greatly reducing leakage and friction loss, and ensuring extremely high efficiency at all speeds.

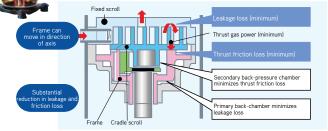



Heat Caulking Fixing Method

To fix internal parts in place, a Heat Caulking Fixing Method is used, replacing the former arc spot welding method. Distortion of internal parts is reduced, realizing higher efficiency.





DC Fan Motor

A highly efficient DC motor drives the fan of the outdoor unit. Efficiency is much higher than an equivalent AC motor.

₩ Vector-Wave Eco Inverter

This inverter monitors the varying compressor motor frequency and creates the most efficient waveform for the motor speed. As a result, operating efficiency in all speed ranges is improved, less power is used and annual electricity cost is reduced.


Smooth wave pattern


Inverter size has been reduced using insert-molding, where the circuit pattern is molded into the synthetic resin. $\dot{\text{To}}$ ensure quiet operation, soft PWM control is used to prevent the metallic whine associated with conventional inverters.



PAM PAM (Pulse Amplitude Modulation)


PAM is a technology that controls the current waveform so that it resembles the supply voltage wave, thereby reducing loss and realizing more efficient use of electricity. Using PAM control, 98% of the input power supply is used effectively.

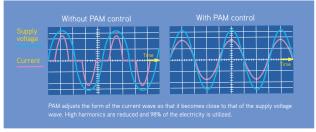

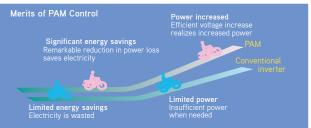

Power Receiver and Twin LEV Control


Mitsubishi Electric has developed a power receiver and twin linear expansion valves (LEVs) circuit that optimize compressor performance. This technology ensures optimum control in response to operating waveform and outdoor temperature. Operating efficiency has been enhanced by tailoring the system to the characteristics of R410A refrigerant.

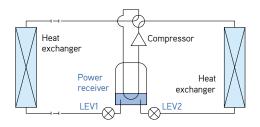



Grooved Piping

High-performance grooved piping is used in heat exchangers to increase the heat exchange area.




FEATURES

3D i-see Sensor®

3D F-see Sensor for Nv-Series

The WPH Model is equipped with 3D i-see Sensor®, an infrared-ray Sensor that measures the temperature at distant positions. While moving to the left and right, eight vertically arranged Sensor elements analyze the room temperature in three dimensions. This detailed analysis makes it possible to judge where people are in the room, thus allowing creation of features such as Indirect Airflow, to avoid airflow hitting people directly, and Direct Airflow to deliver airflow to where people are located in the space.

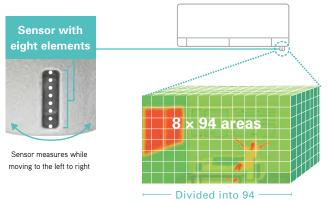

Indirect Airflow

The Indirect Airflow setting can be used when the flow of air feels too strong or direct. For example, it can be used during cooling to avert airflow and prevent body temperature from becoming excessively cooled.

Direct Airflow


This setting can be used to directly target airflow at people such as for immediate comfort when coming indoors on a hot (cold) day.





Absence Detection

The Sensors detect whether there are people in the room. When no-one is in the room the unit automatically switches to energy-saving mode.

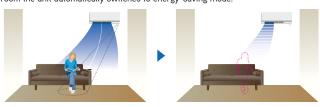

3D F-see Sensor for CKS and PLA Models

The 3D i-see Sensor detects people's absence and the power consumption is automatically reduced approximately 10% after 10 minutes and 20% after 60 minutes.

Detects number of people


The 3D i-see Sensor detects the number of people in the room and adjusts the power accordingly. This makes automatic power-saving operation possible in places where the number of people changes frequently. Additionally, when the area is continuously unoccupied, the system switches to a more enhanced power-saving mode. Depending on the setting, it can also stop the operation.

Detects people's position

Once a person is detected, the angle of the vane is automatically adjusted. Each vane can be independently set to Direct Airflow or Indirect Airflow according to preference.

Highly accurate people detection

A total of eight Sensors rotate a full 360° in 3-minute intervals. In addition to detecting human body temperature, our original algorithm also detects people's positions and the number of people in the space.

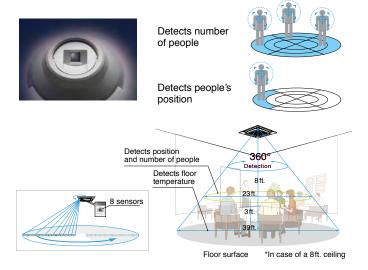

Detects number of people

Room occupancy energy-saving mode


The 3D i-see Sensor detects the number of people in the room. It then calculates the occupancy rate based on the maximum number of people in the room up to that point in time in order to save air-conditioning power. When the occupancy rate is approximately 30%, air-conditioning power equivalent to 2° F during both cooling and heating operation is saved. The temperature is controlled according to the number of people.

No occupancy energy-saving mode

When 3D i-see Sensor detects that no one is the room, the system is switched to a pre-set power-saving mode. If the room remains unoccupied for more than 60 min, air-conditioning power equivalent to 4° F during both cooling and heating operation is saved. This contributes to preventing waste in terms of heating and cooling.

No occupancy Auto-OFF mode

When the room remains unoccupied for a pre-set period of time, the air conditioner turns off automatically, thereby providing even greater power savings. The time until operation is stopped can be set in intervals of 10 min, ranging from 60 to 180 min.

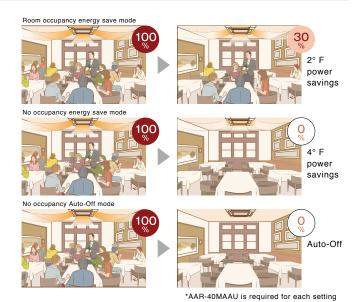

Detects people's position

Direct/Indirect settings*

The horizontal airflow spreads across the ceiling. When set to Indirect Airflow that uncomfortable drafty-feeling is eliminated completely!



*AAR-40MAAU is required for each setting.

Seasonal airflow*

When Cooling

Saves energy while keeping a comfortable effective temperature by automatically switching between ventilation and cooling. When a pre-set temperature is reached, the air conditioning unit switches to swing fan operation to maintain the effective temperature. This clever function contributes to keeping a comfortable coolness.

When Heating

The air conditioning unit automatically switches between circulator and heating. Wasted heat that accumulates near the ceiling is re-used via circulation. When a pre-set temperature is reached the air conditioner switches from heating to circulator and blows air in the horizontal direction. It pushes down the warm air that has gathered near the ceiling to people's height, thereby providing smart heating.




Cooling mode

*AAR-40MAAU is required for each setting.

🔼 Area Temperature Monitor

The 3D i-see Sensor monitors the whole room in sections and directs the airflow to areas of the room where the temperature does not match the temperature setting. (When cooling the room, if the middle of the room is detected to be hotter, more airflow is directed towards it.) This eliminates unnecessary heating /cooling and contributes to lower electricity costs.





ENERGY-SAVING



Econo Cool Energy-Saving Feature

Econo Cool is an intelligent temperature control feature that adjusts the amount of air directed towards the body based on the air-outlet temperature. The setting temperature can be raised by as much as 4° F without any loss in comfort, thereby realizing a 20% gain in energy efficiency. (Function only available during manual cooling operation.)

	Conventional	Econo Cool
Ambient Temperature	95° F	95° F
Set Temperature	77° F	81° F
Perceived Temperature	86° F	85° F

Fcono Cool Mode

A comfortable room environment is maintained even when setting the temperature 4° F higher than the conventional cooling mode.





Temperature distribution (° F)

61 64 68 72 75 79

Demand Function (Onsite Adjustment)

The demand function can be activated when the unit is equipped with a commercially available timer or an On/Off switch is added to the CNDM connector (option) on the control board of the outdoor unit. Energy consumption can be reduced up to 100% of the normal consumption according to the signal input from outside.

[Example: P-Series]

Limit energy consumption by changing the settings of SW7-1, SW1 and SW2 on the control board of the outdoor unit. The following settings are

SW7-1	SW1	SW2	Energy Consumption			
	OFF	OFF	100%			
ON	ON	OFF	75%			
ON	ON	ON	50%			
	OFF	ON	0% (Stop)			

^{*} PUY/PUZ outdoor only



Blue Fin Heat Exchanger

Anti-corrosion treatment is done to the heat exchanger of the outdoor units. This coating prevents the corrosion of the aluminum fins caused by salt in the air especially in coastal areas. (Corrosion of the heat exchanger will effect the efficiency and performance of the air conditioner.)

AIR QUALITY



Nano Platinum Filter

This filter has a large capture area and incorporates nanometer-sized platinum-ceramic particles that work to kill bacteria and deodorize the circulating air.



Catechin Filter

Catechin is a bioflavonoid by-product of green tea with both antiviral and antioxidant qualities. In addition to improving air quality, it prevents the spreading of bacteria and viruses throughout the room, and also has an excellent deodorizing effect.



Air Filter

This filter can remove dust particles from the air.



Deodorizing Filter

The catalyst coating on the honeycomb-structured frame captures small foul-smelling substances in the air, then breaks down the source of the odors with the power of the ozone generated in a plasma electrode unit.



Electrostatic Anti-Allergy Enzyme Filter

This filter is charged with static electricity, enabling it to attract and capture dust particles that regular filters cannot capture. This filter can also trap allergens such as bacteria and decompose them using enzymes retained in the filter



Air Purifying Filter

The filter has a large capture area and deodorize the circulating air.



📑 Fresh-air Intake

Indoor air quality is enhanced by the direct intake of fresh exterior air.



🔛 High-efficiency Filter

This high-performance filter has a much finer mesh compared to standard filters, and is capable of capturing minute particulates floating in the air that were not previously caught.



Oil Mist Filter

The oil mist filter prevents oil mist from penetrating into the inner part of the air conditioner.



Long-life Filter

A special process for the entrapment surface improves the filtering effect, making the maintenance cycle longer than that of units equipped with conventional filters.



Filter Check Signal

Air conditioner operating time is monitored, and the user is notified when filter maintenance is necessary.

AIR DISTRIBUTION

Double Vane

Double vane separates the airflow in the different directions to deliver airflow not only across a wide area of the room, but also simultaneously to two people in different locations.

Natural Flow Operation

Airflow will become more like natural wind. An occupant will not be directly exposed to the airflow and feel more comfortable.

Indirect/Direct Mode

This mode offers finely-tuned operation by locating where an occupant is in the room and sends the air directly or indirectly according to the selected mode

Powerful Operation

The air conditioner will automatically adjust the fan speed and set temperature for 15 minutes. Rapid cooling and heating will make the room comfortable more quickly.

Wide Airflow

Especially beneficial for large spaces, helping to ensure that the air is well circulated and reaches every corner of the room. Select the desired airflow pattern and it will distribute air horizontally over a wide-ranging 150° in heating mode and 100° in cooling mode.

Horizontal Vane

The air outlet vane swings up and down so that the airflow is spread evenly throughout the room.

🔀 Vertical Vane

The air outlet fin swings from side to side so that the airflow reaches every part of the room.

High Ceiling Mode

In the case of rooms with high ceilings, the outlet-air volume can be increased to ensure that air is circulated all the way to the floor.

Low Ceiling Mode

If the room has a low ceiling, the airflow volume can be reduced for less draft.

♣ Auto Fan Speed Mode

The airflow speed mode adjusts the fan speed of the indoor unit automatically according to the present room conditions.

Auto Vane Control

Outlet vanes can be moved left and right, and up and down using the remote controller. This improved airflow control feature solves the problem of drafts.

BLUE FIN COATING

Blue Fin Condenser

Anti-corrosion treatment is done to the heat exchanger of the outdoor units. This coating prevents the corrosion of the aluminum fins caused by salt in the air especially in coastal areas. (Corrosion of the heat exchanger will effect the efficiency and performance of the air conditioner.)

Standard HEX coatings:

Rated for 240 hours spraying time*

Blue Fin HEX coatings:

Rated for 960 hours spraying time*

*Per JRA 9002 Standard Coating is applied on all Nv-Series single-zone outdoor units


Compatibility:	
Outdoor Unit	Blue Fin Coating
SPH	•
SPF	•
SST	•
SMT	•
SMT 115V	•
SEL	•
SKS (9, 12,15)	•
SKH	•
PUZ/Y-BS (sea coast protection models only)	•
MMX/MPH Multi-zone (branch box type)	•

CONVENIENCE



Smart Set

Smart Set is a simplified setting function that recalls the preferred (pre-set) temperature by pressing a single button on the remote controller. Press the same button twice in repetition to immediately return to the previous temperature setting. Using this function contributes to comfortable waste-free operation, realizing the most suitable air conditioning settings and saving on power consumption when, for example, leaving the room or going to bed.

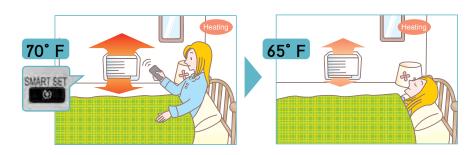



(D≥C)

Auto Changeover

The air conditioner automatically switches between heating and cooling modes to maintain the desired temperature.



Low-temperature Cooling

Intelligent fan speed control in the outdoor unit ensures optimum performance even when the outside temperature is low.



Ampere Limit Adjustment

Dip switch settings can be used to adjust the maximum electrical current for operation. This function is highly recommended for managing energy costs.

*Maximum capacity is lowered with the use of this function.



Auto Restart

Especially useful at the time of power outages, the unit turns back on automatically when power is restored.



Operation Lock (Outdoor unit)

To accommodate specific-use applications, cooling or heating operation can be specified when setting the control board of the outdoor unit. A convenient option when a system needs to be configured for exclusive cooling or heating service.



Sleep Mode

When Sleep Mode is activated using the wireless remote controller, it will switch to the settings described below.

- After 30 minutes, the set temperature will automatically change to the sleep mode set temperature which the user can set beforehand.
- The fan speed will immediately change to low fan speed.



On/Off Operation Timer

Use the remote controller to set the times of turning the air conditioner $\mbox{On/Off}.$

Weekly Timer Function

Easily set desired temperatures and operation ON/OFF times to match lifestyle patterns. Reduce wasted energy consumption by using the timer to prevent forgetting to turn off the unit and eliminate temperature setting adjustments.

■ Sample Operation Pattern (Winter/Heating mode)

Mon.	Tues.	Wed.	Thurs.	Fri.	Sat.	Sun.
ON 68°F	ON 68°F ON 68°F		ON 68°F	ON 68°F	ON 68°F	ON 68°F
		Automatically cha	inges to high-power operatio	n at wake-up time		
OFF	OFF OFF OFF OFF					ON 64°F
	Autom	Midday is warmer, so the temperature is set lower				
ON 72°F	ON 72°F	ON 72°F	ON 72°F	ON 72°F	ON 72°F	ON 72°F
	Automatically	turns on, synchronized with a	rrival at home		Automatically raises temperatu match time when outside-air te	re setting to emperature is low
ON_64°F	ON 64°F	ON 64°F	ON 64°F	ON 64°F	ON 64°F	ON 64°F
		Automatically lowers temp	erature at bedtime for energy	-saving operation at night		
	ON 68°F OFF ON 72°F	ON 68°F OFF OFF Autom ON 72°F Automatically	ON 68°F ON 68°F ON 68°F Automatically cha OFF OFF Automatically turned off during work ON 72°F ON 72°F ON 72°F Automatically turns on, synchronized with a ON 64°F ON 64°F ON 64°F	ON 68°F ON 68°F ON 68°F Automatically changes to high-power operation OFF OFF OFF Automatically turned off during work hours ON 72°F ON 72°F ON 72°F ON 72°F Automatically turns on, synchronized with arrival at home ON 64°F ON 64°F ON 64°F ON 64°F	ON 68°F ON 68°F ON 68°F ON 68°F Automatically changes to high-power operation at wake-up time OFF OFF OFF OFF Automatically turned off during work hours ON 72°F ON 72°F ON 72°F ON 72°F Automatically turns on, synchronized with arrival at home	ON 68°F ON 68°F ON 68°F ON 68°F ON 68°F ON 68°F Automatically changes to high-power operation at wake-up time OFF OFF OFF OFF OFF ON 64°F ON 72°F ON


Settings


Pattern Settings: Input up to four settings for each day

Settings: • Start/Stop operation • Temperature setting * The operation mode cannot be set.

■ Easy set-up using dedicated buttons

The remote controller is equipped with buttons that are used exclusively for setting the Weekly Timer. Setting operation patterns is easy and quick.

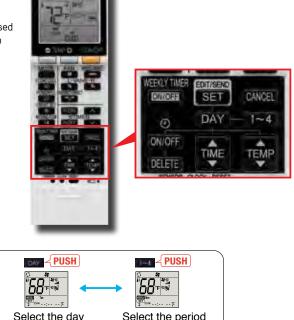

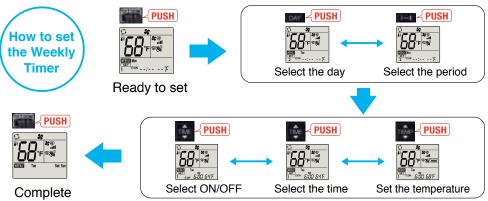

- Start by pushing the "SET" button and follow the instructions to set the desired patterns. Once all of the desired patterns are input, point the top end of the remote controller at the indoor unit and push the "SET" button one more time. (Push the "SET" button only after inputting all of the desired patterns into the remote controller memory. Pushing the "CANCEL" button will end the set-up process without sending the operation patterns to the indoor unit).
- It takes a few seconds to transmit the Weekly Timer operation patterns to the indoor unit. Please continue to point the remote controller at the indoor unit until all data has been sent.

SYSTEM CONTROL



System Group Control

The same remote controller is capable of controlling the operational status of up to 16 refrigerant systems.



kumo cloud® Wireless Interface

Along with your smart phone or tablet device, you can manage your system in multiple venues, such as home, work and vacation locations. You can control functions like turning on/off, fan speed, and vane direction.

M-NET Connection

Units can be connected to MELANS system controllers (M-NET controllers) such as the AE-200A.



MX Connection

Connection to the MX multi-split outdoor unit is possible.



















Apple and the App Store are registered trademarks of Apple, Inc Amazon, Alexa, Fire and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Google play is a registered trademark of Google, Inc.







Manage Your Comfort From Anywhere With kumo cloud

- Now compatible with Nv-Series and P-Series systems
- kumo cloud allows for a American Standard®/Mitsubishi Electric indoor unit to be controlled remotely or locally with the app
- · For product information go to kumocloud.com
- Ability to group units and organize groups into sites
- · Batch command units
- · Ability to program events and scheduling into the unit itself
- · Available in Fahrenheit or Celsius
- · Easy to connect the device to your router using the kumo cloud app
- · Each indoor unit must be equipped with a Wireless Interface (PAC-USWHS002-WF-2) installed by a licensed contractor
- · Secure boot to prevent unauthorized reprogramming of Wireless Interface
- Intuitive initial settings feature for Nv- & P-Series equipment

Did you forget to turn off your unit before leaving for vacation? You don't have a worry in the world when you have the kumo cloud app. You can change temperatures, set and store a schedule, and much more from anywhere. It really is comfort made personal.

Anytime, Anywhere Control kumo cloud gives you the ability to effortlessly control your home's comfort. Whether you're out for the day or the month, looking to cool down or warm up, kumo cloud gives you control from any smart phone, tablet or web browser.


Program and Schedules: kumo cloud walks you through a five-step process to easily schedule the mode, set temperature and fan speed, for an individual zone or several zones at once.

Easily Zoned: Once your Wireless Interface is installed on your indoor unit by a trained HVAC professional, the indoor unit will discover the app. Name your indoor units, create groups, and organize multiple properties from one user-friendly app.

Check Filter Status: You never have to manually check a filter again. kumo cloud can tell you the status of any filter in your system at any time.

kumo touch™

Simple wall-mounted design controllers can be installed anywhere with large, backlit, easy to read display. Both the controller and receiver is enabled with RedLINK reliability.

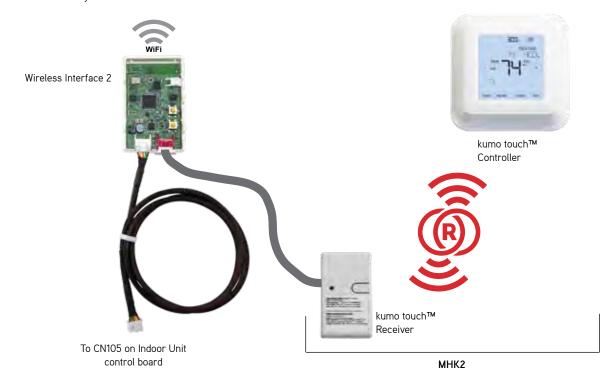

MRCH2 kumo touch Controller Specifications

- Touch panel, Backlit, easy-to-read display
- Used RedLINK™ 3.0 wireless technology
 - Not compatible with MHK1, MOS1, and MCCH1 RedLINK 2.0 wireless technology environment
- User functions allow user to set:
 - On/Off
 - Operation modes cool, heat, drying, fan
 - Set temperature (separate dual set points for heat and cool)
 - Fan speed setting
 - Airflow direction
- Set temperature range limits (dependent on the system connected):
 - Cooling from 50° to 99° F
 - Heating from 40° to 90° F
 - Auto from 50° to 90° F with dual temperature setting
- MHK2 Scheduling options:
 - No Schedule
 - MO-SU = Every day the same
 - MO-FR, SA, SU = 5-1-1 schedule
 - MO-FR, SA-SU = 5-2 schedule
 - Each Day = Every day individual
 - Allow kumo cloud to be schedule holder
- Hold function
- Temporary or Permanent schedule override
- Lockout:
 - On, Off, Mode, Fan Speed, Set point, Vane Direction
- Day/Time display with a 12 or 24-hour clock
- Supports both Fahrenheit and Celsius
- RedLINK™ Wireless Connection Status
- · Filter sign display
- Diagnostics: Displays and records error codes
- Adjustable auto mode deadband
- Space temperature offset adjustment
- Space humidity offset adjustment
- Hide (on screen only)
 - Indoor temperature
 - Indoor humidity
- Temperature Sensing Source

- MHK2
- Indoor Unit
- RedLINK Wireless Indoor Air Sensor (IAS)
- Average of MHK2 and RedLINK Wireless Indoor Air Sensor (IAS)
- Indoor Humidity Source
 - MHK2
 - RedLINK Wireless Indoor Air Sensor (IAS)
 - Average of MHK2 and RedLINK Wireless Indoor Air Sensor (IAS)
- · Improved indoor unit function code list
 - Indoor unit type
 - Expanded to 28 indoor unit codes
- Reset to factory default
- Uses two "AA" alkaline batteries (included)
- Dimensions: 4-5/64" x 4-5/64" x 1-1/16" (104 x 104 x 27 mm)
- Operating Ambient Temperature: 32° to 120° F (0° to 48.9° C)
- Operating Relative Humidity: 5% to 90%

MIFH2 WIRELESS RECEIVER SPECIFICATIONS:

- · Included in MHK2 Kit
- Mounts next to or near indoor units to allow MRCH2 Remote Controller operation
- · Connects to indoor unit control board with MRC2 Cable
- Dimensions: 3-3/32" H x 1-3/4" W x 39/64" D (74.8 x 44.4 x 15.4 mm)
- Operating Ambient Temperature: -40° to 165° F (-40° to 73.9° C)
- · Operating Relative Humidity: 5% to 95%

MRC2 CABLE

- Included in MHK2 Kit in the MIFH2 box
- Connects MIFH2 Wireless Receiver to the CN105 connector on indoor unit control board
- Length: 39-23/64" (1 m)

WIRED CONTROLLERS

🛅 Simple MA Remote Controller

- · Controls group operation for up to 16 indoor units in a single group
- Supports Fahrenheit and Celsius
- User defined functions:
 - On/Off
 - Operation modes: Heat/Cool/Auto/Dry
 - Fan speed setting
 - Airflow direction
 - Set temperature range: 40° F to 95° F depending on operation mode and indoor unit connected
- Set temperature range limit for cool and heat modes
- LOSSNAY®: Simple MA for interlocked system can set high/low/stop on LOSSNAY
- Room temperature can be sensed either at indoor unit (default) or at the remote controller
- Dimensions: 2-3/4" W x 9/16" D x 4-3/4" H
- · Requires MAC-334IF-E for use with Nv-Series products



PAC-YT53CRAU-J

🔲 Deluxe MA Remote Controller

- · User defined functions:
 - On/Off
 - Operation modes: Heat/Cool/Auto/Dry
 - Room temperature setting & Temperature range restriction
 - Manual vane angle (P-Series cassette indoor units)
 - Smooth maintenance (P-Series only)
 - Auto-off timer & Weekly timer
- Setting screen for 3D i-see Sensor®
- · Draft reduction mode
- Daylight Saving Time (DST)
- Dimensions: 4-3/4" W x 3/4" D x 4-3/4" H
- Requires MAC-334IF-E for use with Nv-Series ductless products
- Room temperature displays room temperature sensed either at the indoor unit (default) or at the controller



AAR-40MAAU

Touch MA Remote Controller

- User-friendly, customizable full color touch panel display
- · Ability to add a custom logo on the display
- Large icons with 180 color patterns
- Daily and weekly timers
- Password protected
- Requires MAC-334IF-E for use with Nv-Series products
- The MELRemo app and Bluetooth® Low Energy (BLE) technology supports communication with smartphones or tablets in multiple languages



PAR-CT01MAU-SB

INTERFACE DEVICES

T-STAT Thermostat Interface

- Control your Zoned Comfort Solution using a third-party 24VAC transformer
- Wires back to the indoor unit using CN105 to replace the return air temperature sensor
- Maximum wiring length: 39' (12 m)
- Dimensions: 3.17 in (w) x 3.96 in (h) x 0.93 in (d) (80.6 x 100.6 x 23.7 mm)
- Exterior shell made of ABS resin
- Environment Conditions operating temperature range: Installation manual states that the temperature should be between 32° F and 104° F (0° C to 40° C)



BACnet® Interface

- · Allows for third-party home automation/building management system to control indoor unit
- One interface required per indoor unit
- Compatible with remote controllers
- Dimensions: 3.74" x 2" x 0.75"
- Cable length: 37"
- · Allows for third-party home automation/building management system to control indoor unit



USNAP Interface

- Allows indoor units to participate in demand response events
- Works with CTA 2045 DC Form Factor Universal Communication Modules (UCMs)
- 3 LEDs to display device status
 - Communication with UCM
 - Communication to indoor unit
 - Demand Response Events
- System Reset



MAC-334IF-E System Control Interface

- Allows Nv-Series indoor units to communicate with the CITY MULTI® Controls Network via M-NET
- Provides an input to allow remote On/Off control of indoor unit
- Allows Nv-Series indoor units to connect to MHK2 Wall-Mounted Wireless Controller when using other MAC-334IF-E functions
- · Allows Nv-Series indoor units to connect to a MA controller
- Power: 12V DC (supplied from indoor unit)



FEATURES

													Nv-Seri	es								
	Category	Icon	rtion	Indoor unit		NAXWI	PH(06/09)/12/15/18)A112A*		MS	SZ-EF09/	12/15/18	NA(W)(B)	(S)		NAXW	ST(06/09/	/12/15/18	A112A*		
	Cutogory	IOOII	Combination	Outdoor Unit	NAXSPH	MX 2 zone	MX 3 zone	MX 4 zone	MX 5 zone	MX 8 zone	MX 2 zone	MX 3 zone	MX 4 zone	MX 5 zone	MX 8 zone	NAXSST	MX 2 zone	MX 3 zone	MX 4 zone	MX 5 zone	MX 8 zone	
	i-see	Radiant Tempera (3D i-see Sensor		ntrol	•	•	•	•	•	•												
	Sensor	AREA Temperatu	re Mon	itor	•	•	•	•	•	•												
	Energy Saving	Econo Cool			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
		Nano Platinum Filter		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
		Catechin Filter																				
		Air Cleaning Filte	r																			
	Air Quality	Deodorizing Filter	-		•	•	•	•	•	•												
		Electrostatic Anti- Enzyme Filter	Allergy		•	•	•	•	•	•	•	•	•	•	•	24	24	24	24	24	24	
		Anti-Allergy Enzy	me Filte	er												06-18	06-18	06-18	06-18	06-18	06-18	
		Air Purifying Filter	-																			
		Double Vane			•	•	•	•	•	•												
S		Horizontal Vane			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Functions		Vertical Vane			•	•	•	•	•	•						18/24	18/24	18/24	18/24	18/24	18/24	
"	Air Distribution	Natural Flow Ope	ration		•	•	•	•	•	•												
		Wide Airflow														24	24	24	24	24	24	
		Indirect/Direct Air	flow		•	•	•	•	•	•												
		Powerful Operation	on		•	•	•	•	•	•						24	24	24	24	24	24	
		Smart Set			•	•	•	•	•	•	•	•	•	•	•	06-18	06-18	06-15	06-18	06-18	06-18	
		Auto Restart			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
		Low Temperature	Coolin	9	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	Convenience	Sleep Mode																				
		12H On/Off Opera	ation Ti	mer																		
		24H On/Off Opera	ation Ti	mer	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
		Weekly Timer			•	•	•	•	•	•	•	•	•	•	•							
	Maintenance	Blue Fin			•			• *1	• *1	•			• *1	• *1	•	•			• *1	• *1	•	

^{*1} Branch box units only: NAXMMX48A182**, NAXMMX6OA182**, NAXMPH36A142**, NAXMPH42A152**, and NAXMMX48A182**
*2 Sea coast protection models only {-BS}

								Nv	-Series	6													
NAXWST (30/36) A112A*	NAXWMT (09/12/15/ 18/24)A112A*	NAYWST (09/12/15/ 18/24)A112A*	NAYWST (30/36) A112A*	NAXWEL (09/12/18/24) A112A*	NAXWMT 115V(09/12) A111A*			(09/1	XFKS 2/15/1: 112A*	8)				NAX (09/1 A11	UKS 5/18) 2A*				(12/18/2	AMT 4/30/36 2A*)	
NAXSST	NAXSMT	NAYSST	NAYSST	NAXSEL	NAXSMT 115V	NAXSPF	MX 2 zone	MX 3 zone	MX 4 zone	MX 5 zone	MX 8 zone	NAXSKS	MX 2 zone	MX 3 zone	MX 4 zone	MX 5 zone	MX 8 zone	NAXSKS	MX 2 zone	MX 3 zone	MX 4 zone	MX 5 zone	MX 8 zone
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•						
		•		•	•	•	•	•	•	•	•												
•	•		•															•	•	•	•	•	•
																			-		-	-	
		24																					
•	Opt	09-18	•			Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt						
												•	•	•	•	•	•						
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•						
•	18/24		•									•	•	•	•	•	•						
•	24	•																					
	24	•	18/24			•	•	•	•	•	•												
	06-18		10/21					•		•			•	•	•		•						
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
						•	•	•	•	•	•	•	•	•	•	•	•						
	•																						
•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•						
						•	•	•	•	•	•	•	•	•	•	•	•				,t.	a.	
	•	•		•	•	•			• *1	• *1	•	•			• *1	• *1	•	•			• *1	• *1	•

Opt: Separate parts must be purchased.

FEATURES

						Nv-Series P-Series																			
	Category	Icon	ion	lion	Indoor unit		NAXC	:KS(09/	12/15/18)A112A*			NAXD	KS(09/1	2/15/18)A112A*		PLA-A12/18/24/30/36/42EA7							
			Combination	Outdoor Unit	NAXSKS	MX 2 zone	MX 3 zone	MX 4 zone	MX 5 zone	MX 8 zone	NAXSKS	MX 2 zone	MX 3 zone	MX 4 zone	MX 5 zone	MX 8 zone	PUZ-A	PUY-A	PUZ-HA	MX 3 zone	MX 4 zone	MX 5 zone	MX 8 zone		
	i-see	Radiant Temperature Control (3D i-see Sensor®)														•	•	•	•	•	•	•			
	Sensor	AREA Monito		erature													•	•	•	•	•	•	•		
	Energy	ENER	GY ST	ΓAR [©]													12/18/ 24/36	12/18/ 24/36	30/36						
	Saving	Demand Function (AAR-40MAAU)															•	•	•						
		Fresh-air Intake			•	•	•	•	•	•							•	•	•	•	•	•	•		
	Air	High-efficiency Filter																							
	Quality	Long-life Filter			•	•	•	•	•	•							•	•	•	•	•	•	•		
		Filter Check Signal			•	•	•	•	•	•							•	•	•	•	•	•	•		
		Vertical Swing			•	•	•	•	•	•							•	•	•	•	•	•	•		
<u>s</u>		Horizontal Swing																							
Functions	Air Distribution	High Ceiling Mode			•	•	•	•	•	•							•	•	•	•	•	•	•		
		Low Ceiling Mode															•	•	•	•	•	•	•		
		Auto Fan Speed Mode			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
		Auto R	estart		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
		Low Te	Low Temperature Cooling			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
	Convenience	12H Or Operat	n/Off ion Ti	mer																					
		24H On/Off Operation Timer																							
		Weekly	Weekly Timer																						
		Self-Di	Self-Diagnostic Function			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
	Maintenance	Failure Function		II	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
		Blue Fi	n		•			• *1	• *1	•	•			• *1	• *1	•	• *2	• *2			• *1	• *1	•		

^{*1} Branch box units only: NAXMMX48A182**, NAXMMX60A182**, NAXMPH36A142**, NAXMPH42A152**, and NAXMMX48A182**
*2 Sea coast protection models only (-BS)

									P-S	ERIES											
PKA	(A-A12/18H \-A24/30/36	HA7 BKA7	PCA-A24/30/36/42KA7							PEAD-A12/18/24/30/36/42AA7								PVA-A12/18/24/ 30/36/42AA7			
PUZ-A	PUY-A	PUZ-HA	PUZ-A	PUY-A	PUZ-HA	MX 3 zone	MX 4 zone	MX 5 zone	PUZ-A	PUY-A	PUZ-HA	MX 2 zone	MX 3 zone	MX 4 zone	MX 5 zone	MX 8 zone	PUZ-A	PUY-A	PUZ-HA		
			Opt	Opt	Opt	Opt	Opt	Opt													
									12	12	30/36						12	12	30/36		
•	•	•	•	•	•				•	•	•						•	•	•		
			•	•	•	•	•	•													
			Opt	Opt	Opt	Opt	Opt	Opt													
0-4	0-4	0-4	•	•	•	•	•	•	•	•	•	•	•	•	•	•					
Opt	Opt	Opt	•	•	•	•	•	•	•	•	•	•	•	•	•	•					
•	•	•	•	•		•	•														
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
 •	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
• *2	• *2		• *2	• *2			• *1	• *1	• *2	• *2				• *1	• *1	•	• *2	• *2			

Opt: Separate parts must be purchased.

Series Series








LINE-UP

HEAT PUMP

A multiple model line-up to choose from, each with various outstanding features. In addition to inverter-equipped wall-mounted models, floor-standing and multi-position air handlers can be selected. Choose the best style to match usage needs.

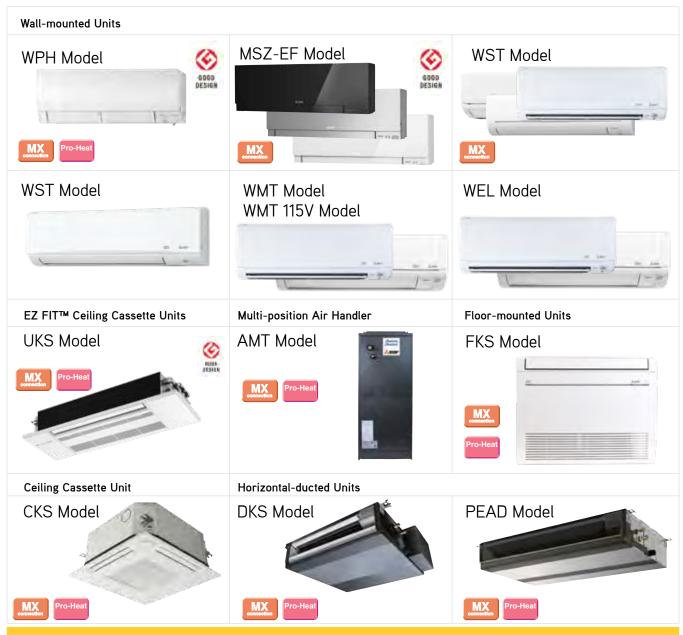

COOLING ONLY

For applications with needs for only cooling, there are cooling-only models to choose from.




WPH Model

The WPH Model is designed for optimum cooling/heating performance as well as operational comfort. Quiet, energysaving operation is supported by some of our latest technologies. Advanced functions such as the 3D i-see Sensor® temperature control and Triple-action filtration raise room comfort levels to new heights.




ENERGY STAR® Certified for Entire Range of Series

The WPH Model has achieved an industry-leading efficiency of 33.1 SEER (NAXWPH06A112A*) and 30.5 SEER (NAXWPH09A112A*). All systems of the WPH Model feature high efficiencies and are ENERGY STAR® qualified, meaning that these units can save up to 25% on heating and cooling costs when installed correctly.

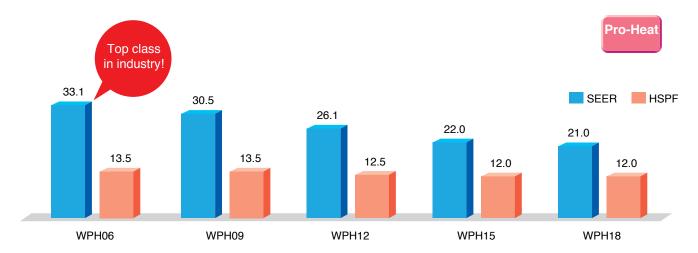

Pro-Heat INVERTER®

The WPH Model can provide heating even when it's minus 13° F outdoor ambient, producing up to 100% heating capacity at 5° F. These units offer yearround comfort even in extreme climates.

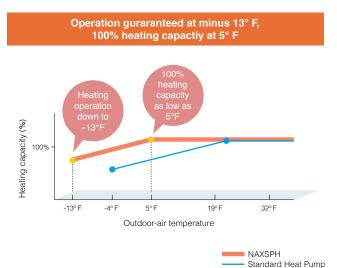

Base Heater equipped as standard*

The base heater restricts lowered capacity and operation shutdowns caused by the drain water freezing. This supports stable operation in low-temperature environments.



Optional for NAXSPH models

3D i-see Sensor

The WPH Model is equipped with 3D i-see Sensor®, an infrared-ray Sensor that measures the temperature at distant positions. While moving to the left and right, eight vertically arranged Sensor elements analyze the room temperature in three dimensions. This detailed analysis makes it possible to judge where people are in the room, thus allowing creation of features such as Indirect Airflow, to avoid airflow hitting people directly, and Direct Airflow to deliver airflow to where people are located.

Sensor with eight elements 8 x 94 areas Sensor measures while moving to the left to right Divided into 94

Indirect Airflow

The Indirect Airflow setting can be used when the flow of air feels too strong or direct. For example, it can be used during cooling to avert airflow and prevent body temperature from becoming excessively cooled.

vely cooled.

Direct Airflow


This setting can be used to directly target airflow at people such as for immediate comfort when coming indoors on a hot (cold) day.



Absence Detection


The Sensors detect whether there are people in the room. When no one is in the room the unit automatically switches to energy-saving mode.





The 3D i-see Sensor detects people's absence and the power consumption is automatically reduced approximately 10% after 10 minutes and 20% after 60 minutes.


Natural Flow

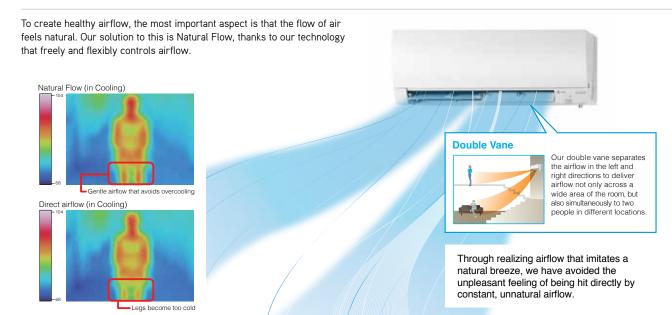

Base data for Natural Flow




Kirigamine Highland is one of the most famous sightseeing spots in Japan, and is visited by a large number of people for its pleasant and comfortable environment. We have attempted to recreate this Kirigamine Highland comfort. As part of development, seeking to create a natural airflow, we measured actual data on the refreshing breezes of Kirigamine Highland. Through imitating the natural waveforms of this data, we have been able to recreate almost-imperceptible currents of gently comforting airflow.




Triple-action Filtration

Air, like water, is something we use every day unconsciously. Yet, clean, fresh air is a vital part of creating a healthy space for humans. Healthy air is achieved with three filters: the Nano Platinum filter, the Deodorizing filter, and the Electrostatic anti-allergy enzyme filter.

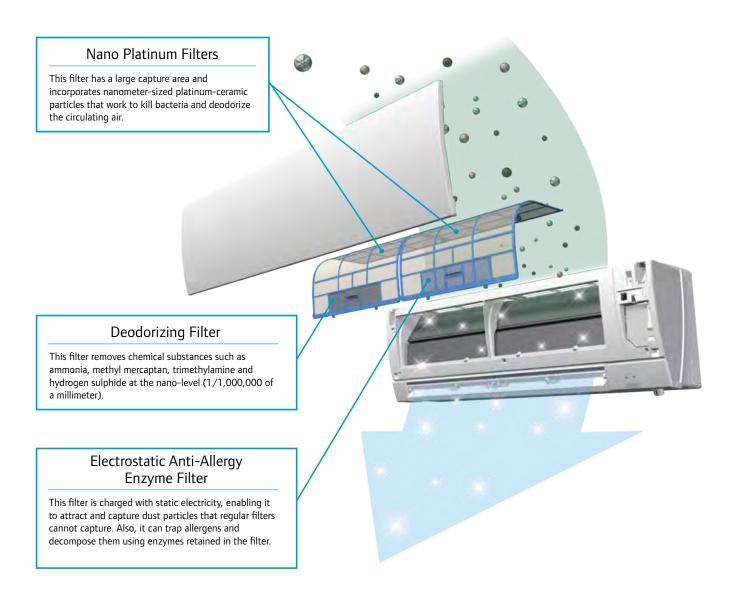

Quiet Operation

The indoor unit noise level is as low as 20dB(A) for WPH06/09 models, offering a peaceful inside environment.

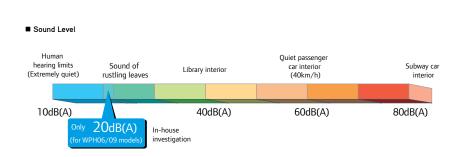

WPH Model



















NAXWPH(06/09/12/15/18)A112A* NAXWPH18A112A*



Outdoor Unit



NAXSP(H/B)(06/09/12)A112A*



NAXSP(H/B)(15/18)A112A*



















* To confirm compatibility with the MX Model multi-zone system, refer to MX Model page.













































Indoor Unit	
Outdoor Unit	
	C
	C
Cooling	F
	٨
	S
	0

Indoor Unit				NAXWPH06A112A*	NAXWPH09A112A*	NAXWPH12A112A*	NAXWPH15A112A*	NAXWPH18A112A*		
Outdoor Unit				NAXSPH06A112A*	NAXSPH09A112A*	NAXSPH12A112A*	NAXSPH15A112A*	NAXSPH18A112A*		
	Capacity	Rated ¹	BTU/H	6,000	9,000	12,000	15,000	17,200		
Cooling	Capacity Range	Min-Max	BTU/H	1,700-9,000	1,700-12,000	2,500-13,600	6,450-19,000	6,450-21,000		
	Power Input	Rated ¹	W	315	560	870	1,200	1,375		
	Moisture Removal	Pints/h		0.2	0.6	1.9	4.0	4.8		
	Sensible Heat Factor			0.960	0.920	0.830	0.700	0.690		
	Capacity at 47°F	Rated ²	BTU/H	8,700	10,900	13,600	18,000	20,300		
	Capacity Range	Min-Max	BTU/H	1,600-14,000	1,600-18,000	3,700-21,000	5,150-24,000	5,150-30,000		
	Power Input at 47°F	Rated ²	W	545	710	950	1,300	1,720		
leating		Rated ³	BTU/H	5,900	6,700	8,000	11,000	13,700		
	Capacity at 17°F	Max	BTU/H	10,700	12,200	13,600	18,000	20,300		
	Capacity at 5°F	Max ⁴	BTU/H	8,700	10,900	13,600	18,000	20,300		
	SEER			33.1	30.5	26.1	22.0	21.0		
	EER			19.1	16.1	13.8	12.5	12.5		
Efficiency	HSPF			13.5 (12.5)	13.5 (12.5)	12.5 (11.5)	12.0 (11.0)	12.0 (11.0)		
	COP			4.68	4.5	4.2	4.06	3.46		
	ENERGY STAR® Certified			Yes	Yes	Yes	Yes	Yes		
	Air Flow Rate - Cooling	Dry	CFM	137-167-221-304-381	137-167-221-304-381	137-167-221-304-398	225-262-304-355-411	225-262-304-355-		
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	117-143-190-261-328	117-143-190-261-328	117-143-190-261-342	194-225-261-305-354	194-225-261-305-		
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	140–167–225–325–437	140-167-225-325-437	140-167-225-325-454	201–254–317–394–497	201–254–317–394–		
	Sound Pressure Level	Cooling	dB(A)	20-23-29-36-40	20-23-29-36-40	21-24-29-36-41	27-31-35-39-44	27–31–35–39–47		
	(Quiet-Lo-Med-Hi-SHi)	Heating dB(/		20-24-29-36-42	20-24-29-36-42	21-24-29-36-42	25-29-34-39-46	25-29-34-36-46		
ndoor Unit	External Static Pressure	In. W.G.	_	_	_	_	_			
	Condensate Lift Mechanism	Max Distance	In. [mm]	_	_	_	_	_		
		Н	In. [mm]	12 (+11/16) [305 (+17)]	12 (+11/16) [305]	12 (+11/16) [305 (+17)]	12 (+11/16) [305 (+17)]	12 (+11/16) [305 (+1		
	Dimensions	w	In. [mm]	36-7/16 [925]	36-7/16 [925]	36-7/16 [925]	36-7/16 [925]	36-7/16 [925]		
		D	In. [mm]	9-3/16 [234]	9-3/16 [234]	9-3/16 [234]	9-3/16 [234]	9-3/16 [234]		
	Weight	lbs [kg]		29 [13.5]	29 [13.5]	29 [13.5]	29 [13.5]	29 [13.5]		
	MCA	Α		11.0	11.0	11.0	16.0	16.0		
	MOCP	Α		15	15	15	20	20		
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]	34-5/8 [880]		
	Dimensions	w	In. [mm]	31-1/2 [800]	31-1/2 [800]	31-1/2 [800]	33-1/16 [840]	33-1/16 [840]		
Outdoor Unit		D	In. [mm]	11-1/4 [285]	11-1/4 [285]	11-1/4 [285]	13 [330]	13 [330]		
	Weight		81 [37]	81 [37]	83 [38]	124 [56]	124 [56]			
	Air Flow Rate (Cooling/Heating)	lbs [kg] CFM		1074/1202	1074/1202	1074/1202	1692/1634	1692/1634		
	O D I	Cooling	dB(A)	47	48	49	51	52		
	Sound Pressure Level	Heating	dB(A)	48	49	51	55	55		
		Gas (O.D.)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]		
	Lat. 1	1								

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

Temperature
Operation Range Heating

Piping

Electrical

Refrigerant Type

Guaranteed

Conditions

Diameter

Max. Length

Max. Height

Cooling ⁶

Outdoor-Indoor 5

Recommended Breaker Size A

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) ⁴Heating at 5°F (Indoor // Outdoor)

Liquid (O.D) In. [mm]

Indoor Drain In. [mm]

ft [m]

ft [m]

V, ph, Hz

°F DB [°C DB]

°F DB [°C DB]

3/8 [6.35]

5/8 [15.88]

65 [20]

40 [12]

208/230, 1, 60

15

R410A

14.0 to 115.0

[-10.0 to 46.0]

-13.0 to 75.0

[-25.0 to 24.0]

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB

70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

3/8 [6.35]

5/8 [15.88]

65 [20]

40 [12]

208/230, 1, 60

15

R410A

14.0 to 115.0

[-10.0 to 46.0]

-13.0 to 75.0

[-25.0 to 24.0]

3/8 [6.35]

5/8 [15.88]

65 [20]

40 [12]

208/230, 1, 60

15

R410A

14.0 to 115.0

[-10.0 to 46.0]

-13.0 to 75.0 [-25.0 to 24.0]

1/2 [12.7]

5/8 [15.88]

100 [30]

50 [15]

208/230, 1, 60

20

R410A

14.0 to 115.0

[-10.0 to 46.0]

-13.0 to 75.0

[-25.0 to 24.0]

1/2 [12.7]

5/8 [15.88]

100 [30]

50 [15]

208/230, 1, 60

20

R410A

14.0 to 115.0

[-10.0 to 46.0]

-13.0 to 75.0

[-25.0 to 24.0]

⁵Indoor units receive power from outdoor units through field-supplied interconnected wiring. ⁶Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

MSZ-EF Model

Developed to complement modern interior room décor, the EF Model are available in three colors specially chosen to blend in naturally wherever installed.



A Stylish Line-up Matches Any Room Décor


The streamlined wall-mounted indoor units have eloquent edges, expressing sophistication and quality. Combining impressively low power consumption and quiet yet powerful performance, these units provide a best-match scenario for diverse interior designs while simultaneously ensuring maximum room and energy savings.





Quiet Operation All Day Long

Our advanced Quiet Mode fan speed setting provides super-quiet operation as low as 21dB(A) for EF09/12 models. This unique feature makes the EF Model ideal for use in any situation.

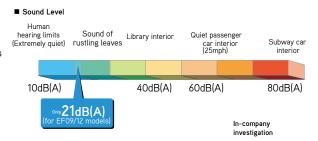

Superior Exterior and Operating Design Concept

The indoor unit of the EF Model keeps its amazingly thin form even during operation. The only physical change notable is the movement of the variable vent. As a result, a slim attractive look is maintained.



MSZ-EF Model







ndoor Unit				MSZ-EF09NAW(S)(B)	MSZ-EF12NAW(S)(B)	MSZ-EF15NAW(S)(B)	MSZ-EF18NAW(S)(B)
	Capacity	Rated ¹	BTU/H	-	-	-	-
	Capacity Range	Min-Max	BTU/H	-	_	_	_
Cooling	Power Input	Rated ¹	W	-	_	_	_
	Moisture Removal	Pints/h		_	_	_	_
	Sensible Heat Factor			_	_	_	_
	Capacity at 47°F	Rated ²	BTU/H	_	_	_	_
	Capacity Range	Min-Max	BTU/H	_	_	_	_
	Power Input at 47°F	Rated ²	W	_	_	_	_
leating		Rated ³	BTU/H	_	_	_	_
	Capacity at 17°F	Max	BTU/H	_	_	_	_
	Capacity at 5°F	Max ⁴	BTU/H	_	_	_	_
	SEER			_	_	_	_
	EER			_	_	_	_
fficiency	HSPF			_	_	_	_
,	COP			_	_	_	_
	ENERGY STAR® Certified			_	_	_	_
	Air Flow Rate - Cooling	Dry	CFM	141-162-222-293-371	141–162–222–293–371	205–233–272–314–364	205–240–279–328–388
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	121-140-191-252-319	121-140-191-252-319	176-200-234-270-313	176-206-240-282-334
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	141–162–219–314–420	141–162–219–314–448	194–222–275–350–448	226–258–318–392–466
	Sound Pressure Level	Cooling	dB(A)	21-23-29-36-42	21-24-29-36-42	28-31-35-39-42	30-33-36-40-43
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	21-24-29-37-45	21-24-30-38-46	28-30-35-41-48	30–33–37–43–49
door Unit	External Static Pressure				_	_	_
	Condensate Lift Mechanism			_	_	_	_
		Н	In. [mm]	11-3/4 [299]	11-3/4 [299]	11-3/4 [299]	11-3/4 [299]
	Dimensions	W	In. [mm]	34-13/16 [884]	34-13/16 [884]	34-13/16 [884]	34-13/16 [884]
		D	In. [mm]	7-11/16 [195]	7-11/16 [195]	7-11/16 [195]	7-11/16 [195]
	Weight	lbs [kg]		26 [11.8]	26 [11.8]	26 [11.8]	26 [11.8]
	MCA	Α					
	MOCP	Α			_	_	_
	MICOI	Н	In. [mm]		_	_	_
	Dimensions	w	In. [mm]		_	_	_
	Differisions	D	In. [mm]		_		
Outdoor Unit	Weight	lbs [kg]	nn. pinning		_		
	Air Flow Rate (Cooling/Heating)	CFM			_	_	_
		Cooling	dB(A)	_	_	_	_
	Sound Pressure Level	Heating	dB(A)		_	_	_
		Gas (O.D.)	In. [mm]		_	_	_
	Diameter	Liquid (O.D)	In. [mm]		_	_	_
iping	5.0	Indoor Drain	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
.t3	Max. Length	ft [m]	[11111]	- Jio [13.00]	J/0 [15.00]	- Joe [15.00]	- Jo [13.00]
	Max. Height	ft [m]			_		
	Outdoor-Indoor 5	V, ph, Hz			_		
lectrical					_		
ofrigoront Tur-	Recommended Breaker Size	А			_	_	
Refrigerant Type	01:6	0E DD 100 DD1					
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]			_	_	_
peration Range	Heating	°F DB [°C DB]		_	_	_	_

Notes:

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

⁶Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

NA(X/Y)WST Model Introducing a compact and stylish indoor unit with amazingly quiet performance. Not only are neat installations in small bedrooms,

you can increase energy-savings by selecting the optimal capacity required for each room.

NA(X/Y)WST(30/36)A112A3 NA(X/Y)WST18A112A* NAXWST(06/09/12/15)A112A* NAYWST(09/12/15)A112A*

ENERGY STAR® Qualified for Entire Range of NA(X/Y)WST Model

All systems of the NAXWST and NAYWST Model feature high efficiencies and are ENERGY STAR® qualified.



Wide Line-up with Family Design

Eight different capacities (6,000 BTU/H to 36,000 BTU/H) are available to meet your diversified air conditioning needs, and all capacities from 6,000 BTU/H to 36,000 BTU/H indoor units have a family design. From small rooms to large living rooms, it is possible to coordinate residences with a unified design.



NAXWST(06/09/12/15)A112A* NAYWST(09/12/15)A112A*



NA(X/Y)WST24A112A*




Compact Design

Slim and compact indoor units provide enhanced, industry-leading performance for cooling and heating.



Quiet Operation

The indoor unit noise level is as low as 19dB(A) for WST09/12 models, offering a peaceful inside environment.

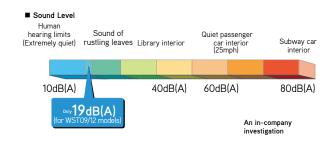

Powerful Operation (WST24, WST30/36)

Depending on the capacity, the unit will automatically adjust the fan speed and set temperature for 15 minutes. Rapid cooling and heating will make the room comfortable more quickly.


Fan speed: Exclusive speed for POWERFUL mode.

Horizontal Vane: Set position, or downward airflow position during AUTO setting.




Nano Platinum Filter (NAXWSTO6, NA(X/Y)WSTO9/12/15/18/24)

This filter generates stable antibacterial and deodorizing effects. The size of the three-dimensional surface has been increased as well, enlarging the filter capture area. These features give the Nano Platinum Filter better dust collection performance than conventional filters. The superior air cleaning effectiveness raises room comfort yet another level.

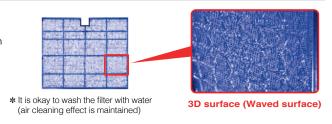

Smart Set (NAXWST06, NA(X/Y)WST09/12/15/18/24)

Smart Set is a simplified setting function that recalls the preferred (pre-set) temperature by pressing a single button on the remote controller. Press the same button twice in repetition to immediately return to the previous temperature setting. Using this function contributes to comfortable, waste-free operation, realizing the most suitable air conditioning settings and saving on power consumption when, for example, leaving the room or going to bed.

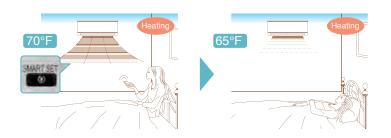

NA(X/Y)WST Model





Outdoor Unit















* To confirm compatibility with multi-zone NAXSST18A112A* system, refer to NAYSST18A112A* MX Model page.





















































	USNAP	
	Optional	
Indoor	Unit	

Optional	









Failure
railuie
Recall

Indoor Unit				NAYW- ST09A112A*	NAYW- ST12A112A*	NAYW- ST15A112A*	NAYW- ST18A112A*	NAYW- ST24A112A*	NAYW- ST30A112A*	NAYW- ST36A112A*
Outdoor Uni	it			NAYSST09A112A*	NAYSST12A112A*	NAYSST15A112A*	NAYSST18A112A*	NAYSST24A112A*	NAYSST30A112A*	NAYSST36A112A*
	Capacity	Rated ¹	BTU/H	9,000	12,000	14,000	18,000	22,500	30,700	34,600
Cooling	Capacity Range	Min-Max	BTU/H	3,600-12,200	1,500-13,600	3,100-18,200	5,800-22,000	8,200-31,400	9,800-30,600	9,800-34,600
	Power Input	Rated ¹	W	585	209	1,080	1,340	1,800	3,380	4,249
	Moisture Removal	Pints/h		1.5	2.5	2.7	2.1	5.1	9.9	11.9
	Sensible Heat Factor			0.820	0.770	0.780	0.870	0.750	0.640	0.620
	Capacity at 47°F	Rated ²	BTU/H	_	_	_	_	_	_	_
	Capacity Range	Min-Max	BTU/H	_	_	_	_	_	_	_
	Power Input at 47°F	Rated ²	W	_	_	_	_	_	_	_
Heating	1 ower input at 47 1	Rated ³	BTU/H	_	_	_	_	_	_	_
	Capacity at 17°F	Max	BTU/H	_	_	_	_	_	_	_
	Consoity at EVE	Max ⁴	BTU/H				_		_	
	Capacity at 5°F	IVIAX *	BIU/H							
	SEER			24.6	23.1	21.6	20.5	20.5	16.0	15.1
	EER			15.4	13.0	13.0	13.4	12.5	9.1	8.2
Efficiency	HSPF			_	_	_	_	_	_	_
	COP			_	_	_	_	_	_	_
	ENERGY STAR® Certified			Yes	Yes	Yes	Yes	Yes	No	No
	Air Flow Rate - Cooling	Dry	CFM	145–170–237– 321–399	145–170–237– 321–399	205–272–335– 420–533	258–332–417– 522–646	388–469–544– 628–738	389-639-848-887	389–639–848–887
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	109–134–201– 286–364	109–134–201– 286–364	170–237–300– 385–498	232–299–375– 470–581	347–420–487– 562–661	350-576-763-798	350-576-763-798
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	_	_	_	_	_	_	_
	Sound Pressure Level	Cooling	dB(A)	19–22–30–37–43	19–22–30–37–45	26-32-38-44-49	28-33-38-44-49	34-41-45-49-53	32-42-49-51	32-42-49-51
Indoor Unit	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	_	_	_	_	_	_	-
	External Static Pressure	External Static Pressure In. W.G		_	_	_	_	_	_	_
	Condensate Lift Mechanism	Max Distance	In. [mm]	_	_	_	_	_	_	_
		Н	In. [mm]	11-5/8 [295]	11-5/8 [295]	11-5/8 [295]	12 [305]	12-13/16 [325]	14-3/8 [365]	14-3/8 [365]
	Dimensions	W	In. [mm]	31-7/16 [798]	31-7/16 [798]	31-7/16 [798]	36-5/16 [923]	43-5/16 [1100]	46-1/16 [1170]	46-1/16 [1170]
		D	In. [mm]	9-1/8 [232]	9-1/8 [232]	9-1/8 [232]	9-13/16 [250]	9-3/8 [238]	11-5/8 [295]	11-5/8 [295]
	Weight	lbs [kg]		22 [10.0]	22 [10.0]	22 [10.0]	28 [13.0]	37 [17.0]	40 [18.0]	40 [18.0]
	MCA	Α		7.0	7.0	9.0	14.0	17.1	21.0	21.0
	MOCP	Α		15	15	15	15	20	25	25
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]	34-5/8 [880]	33-7/16 [850]	33-7/16 [850]
	Dimensions	W	In. [mm]	31-1/2 [800]	31-1/2 [800]	31-1/2 [800]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]
Outdoor	Billionolono	D	In. [mm]	11-1/4 [286]	11-1/4 [286]	11-1/4 [286]	13 [330]	13 [330]	13 [330]	13 [330]
Unit	Weight	lbs [kg]	[]	81 [36.7]	81 [36.7]	81 [36.7]	121 [55]	119 [54]	126 [57]	126 [57]
	Air Flow Rate									
	(Cooling/Heating)	CFM		1229/—	1229/—	1243/—	1691/—	1769/—	1941/—	1941/—
	Sound Pressure Level	Cooling	dB(A)	48	49	49	54	55	55	56
	Council Todadio Ecvol	Heating	dB(A)	_	_	_	_	_	_	_
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Max. Length	ft [m]		65 [20]	65 [20]	65 [20]	100 [30]	100 [30]	100 [30]	100 [30]
	Max. Height	ft [m]		40 [12]	40 [12]	40 [12]	50 [15]	50 [15]	50 [15]	50 [15]
	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical	Recommended Breaker Size	Recommended Breaker Size A			15	15	15	20	25	25
Refrigerant	Refrigerant Type			15 R410A	R410A	R410A	R410A	R410A	R410A	R410A
Guaran- teed	Cooling ⁶	°F DB [°C DB]		14.0 to 115.0 [-10.0 to 46.0]						
Tempera- ture Operation Range	Heating	°F DB [°C DB]		_	_	_	_	_	_	_

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB

°F °F 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

Conditions

4Heating at 5°F (Indoor // Outdoor)

5Indoor units receive power from outdoor units through field-supplied interconnected wiring. ⁶Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

NA(X/Y)WST Model















Indoor Unit				NAXW- ST06A112A*	NAXW- ST09A112A*	NAXW- ST12A112A*	NAXW- ST15A112A*	NAXW- ST18A112A*	NAXW- ST24A112A*	NAXW- ST30A112A*	NAXW- ST36A112A*
Outdoor Unit					NAX- SST09A112A*	NAX- SST12A112A*	NAX- SST15A112A*	NAX- SST18A112A*	NAX- SST24A112A*	NAX- SST30A112A*	NAX- SST36A112A*
	Capacity	Rated ¹	BTU/H	_	9.000	12.000	14.000	18.000	22.400	30.600	33.200
	Capacity Range	Min-Max	BTU/H	_	3,600–12,200	1,500–13,600	3,100–18,200	5,800–22,000	8,200–31,400	9,800–30,700	9,800–33,200
Cooling	Power Input	Rated ¹	W	_	585	920	1,080	1,340	1,800	3,850	4,360
	Moisture Removal	Pints/h	• • • • • • • • • • • • • • • • • • • •	_	1.5	2.5	2.7	2.1	5.1	9.9	11.3
	Sensible Heat Factor	1 1110/11		_	0.820	0.740	0.800	0.870	0.750	0.640	0.620
	Capacity at 47°F	Rated ²	BTU/H	_	10,900	14,400	18,000	21,600	27,600	32,600	35,200
	Capacity Range	Min-Max	BTU/H	_	4,500–15,900	2,000–18,100	4,800–20,900	5,400–25,000	7,500–36,900	8,700–34,000	8,700–36,000
	Power Input at 47°F	Rated ²	W	_	720	1,100	1,600	1,680	2,340	3,360	3,840
Heating	rower input at 47 F	Rated ³	BTU/H	_	6,700	9,200	12,200	13,800	16,000	19,500	21,800
	Capacity at 17°F	Max	BTU/H	_	10,200	12,000	16,400	18,200	24.600	20,800	22,800
	Congoity at EVE	Max ⁴	BTU/H	_	8,170	9,790	13,680	14,904	19,320	20,800	22,000
	Capacity at 5°F SEER	IVIAX ·	БТО/П	_	24.6	23.1	21.6	20.5	20.5		
										14.5	14.5
⊏#ioiono:	EER			_	15.4	13.0	13.0	13.4	12.5	8.0	7.6
Efficiency	HSPF			_	12.8	12.5	11.7	11.2	10.0	8.2	8.2
	COP			_	4.44	3.84	3.3	3.77	3.46	2.84	2.69
	ENERGY STAR® Certified			- 470 007	Yes	Yes	Yes	Yes	Yes	No	No
	Air Flow Rate - Cooling	Dry	CFM	145–170–237– 321–399	145–170–237– 321–399	145–170–237– 321–399	205–272–335– 420–533	258–332–417– 522–646	388–469–544– 628–738	389–639–848– 887	389–639–848– 887
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	109–134–201– 286–364	109–134–201– 286–364	109–134–201– 286–364	170–237–300– 385–498	232–299–375– 470–581	347–420–487– 562–661	350–576–763– 798	350–576–763– 798
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	145–170–237– 321–406	145–170–237– 321–406	145–170–237– 321–406	205–247–304– 367–463	297–385–469– 565–646	388–469–544– 628–738	445–639–848– 887	445–639–686– 887
	Sound Pressure Level (Quiet-Lo-Med-Hi-SHi)	Cooling	dB(A)	19–22–30– 37–43	19–22–30– 37–43	19–22–30– 37–45	26–32–38– 44–49	28–33–38– 44–49	34–41–45– 49–53	32-42-49-51	32-42-49-51
Indoor Unit		Heating	dB(A)	19–22–30– 37–43	19–22–30– 37–43	19–22–30– 37–43	26–30–35– 40–46	28–33–38– 43–48	32-41-45- 49-52	34-42-49-50	34-42-49-50
	External Static Pressure In. W.G.		In. W.G.	_	_	_	_	_	_	_	_
	Condensate Lift Mechanism	Max Distance	In. [mm]	_	_	_	_	_	_	_	_
		Н	In. [mm]	11-5/8 [295]	11-5/8 [295]	11-5/8 [295]	11-5/8 [295]	12 [305]	12-13/16 [325]	14-3/8 [365]	14-3/8 [365]
	Dimensions	w	In. [mm]	31-7/16 [798]	31-7/16 [798]	31-7/16 [798]	31-7/16 [798]	36-5/16 [923]	43-5/16 [1100]	46-1/16 [1170]	46-1/16 [1170]
		D	In. [mm]	9-1/8 [232]	9-1/8 [232]	9-1/8 [232]	9-1/8 [232]	9-13/16 [250]	9-3/8 [238]	11-5/8 [295]	11-5/8 [295]
	Weight	lbs [kg]		22 [10.0]	22 [10.0]	22 [10.0]	22 [10.0]	28 [13.0]	37 [17.0]	40 [18.0]	40 [18.0]
	MCA	A		_	9.0	9.0	10.0	14.0	17.0	21.0	21.0
	MOCP	Α		_	15	15	15	15	20	25	25
		Н	In. [mm]	_	21-5/8 [550]	21-5/9 [550]	21-5/10 [550]	34-5/8 [880]	34-5/8 [880]	33-7/16 [850]	33-7/16 [850]
	Dimensions	w	In. [mm]	_	31-1/2 [800]	31-1/2 [800]	31-1/4 [800]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]
Outdoor Unit		D	In. [mm]	_	11-1/4 [285]	11-1/5 [285]	11-1/6 [285]	13 [330]	13 [330]	13 [330]	13 [330]
Outdoor Offit	Weight	lbs [kg]		_	81 [37]	81 [37]	81 [37]	121 [55]	119 [54]	141 [64]	141 [64]
	Air Flow Rate (Cooling/Heating)	CFM		_	1229/1172	1229/1172	1243/1129	1691/1691	1769/1701	1941/1941	1941/1941
		Cooling	dB(A)	_	48	49	49	54	55	55	56
	Sound Pressure Level	Heating	dB(A)	_	50	51	51	55	55	57	56
		Gas (O.D.)	In. [mm]	_	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	_	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
13	Max. Length	ft [m]		-	65 [20]	65 [20]	65 [20]	100 [30]	100 [30]	100 [30]	100 [30]
	Max. Height	π [m]		_	40 [12]	40 [12]	40 [12]	50 [15]	50 [15]	50 [15]	50 [15]
	Outdoor-Indoor 5	V, ph, Hz		_	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical	Recommended Breaker Size	Α		_	15	15	15	15	20	25	25
Refrigerant Type		1		_	R410A						
Guaranteed	Cooling ⁶	°F DB [°C DB]		_	14.0 to 115.0 [-10.0 to 46.0]						
Temperature Operation Range	Heating	°F DB [°C DB]		_	-4.0 to 75.0	-4.0 to -75.0	-4.0 to -75.0				
	_	. 55 [5 55]			[-20.0 to 24.0]						

Notes:

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed) ¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor)

°F °F 80 DB, 67 WB // 95 DB, 75 WB

70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

Conditions ⁴Heating at 5°F (Indoor // Outdoor) ⁵Indoor units receive power from outdoor units through field-supplied interconnected wiring.

⁶Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

WMT Model

Compact, high-performance indoor and outdoor units and advanced inverter technologies provide superior energy savings and comfort in all rooms.




Stylish Design with Flat Panel Front

A stylish flat panel design is employed for the front of the indoor unit. The simple look matches room aesthetics.



Quiet Operation

Quiet, relaxing space is within reach. Operational noise is a low 22dB(A) (09/12 classes). Operation is so silent you might even forget the air conditioner is on.

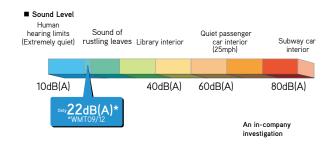


Econo Cool Energy-Saving Feature


Econo Cool is an intelligent temperature control feature that adjusts the amount of air directed towards the body based on the air-outlet temperature. The setting temperature can be raised by as much as 4° F without any loss in comfort, thereby realizing a 20% gain in energy efficiency. (Function only available during manual cooling operation.)

	Conventional	Econo Cool
Ambient Temperature	95° F	95° F
Set Temperature	77° F	81° F
Perceived Temperature	86° F	85° F

Econo Cool Mode

A comfortable room environment is maintained even when setting the temperature 4° F higher than the conventional cooling mode.





58 61 64 68 72 75 79 82

Air Filter

This filter can remove dust particles from the air.

Anti-allergy Enzyme Filter*

(*Optional)

This filter works to trap allergens such as bacteria and decompose them using enzymes retained in the filter.

12-hour Timer

Allows for one ON/OFF cycle during a 12-hour period.

Blue Fin Condenser

Anti-corrosion treatment is done to the heat exchanger of the outdoor units. This coating prevents the corrosion of the aluminum fins caused by salt in the air especially in coastal areas. (Corrosion of the heat exchanger will effect the efficiency and performance of the air conditioner.)

WMT Model











































Econo Cool















Failure	ì
	ı
Recall	

	Oį	ptional		12 hour				
Indoor Unit				NAXWMT09A112A*	NAXWMT12A112A*	NAXWMT15A112A*	NAXWMT18A112A*	NAXWMT24A112A*
Outdoor Unit				NAXSMT09A112A*	NAXSMT12A112A*	NAXSMT15A112A*	NAXSMT18A112A*	NAXSMT24A112A*
	Capacity	Rated ¹	BTU/H	9,000	12,000	14,000	17,200	22,500
	Capacity Range	Min-Max	BTU/H	3,800-10,000	3,800-12,200	3,100-16,000	5,800-18,000	5,800-22,500
Cooling	Power Input	Rated ¹	W	750	1,210	1,170	1,640	2,630
Ü	Moisture Removal	Pints/h		1.5	2.5	2.7	2.1	2.3
	Sensible Heat Factor			0.820	0.770	0.780	0.860	0.890
	Capacity at 47°F	Rated ²	BTU/H	10,900	12,200	18,000	18,000	26,000
	Capacity Range	Min-Max	BTU/H	4,500–11,800	4,500–14,500	4,800–18,500	5,400-20,900	5,400–26,000
	Power Input at 47°F	Rated ²	W	900	990	1,600	1,590	2,500
Heating	·	Rated ³	BTU/H	6,700	7,600	11,500	11,500	18,500
	Capacity at 17°F	Max	BTU/H	7,200	900	14,000	15,000	18,500
	Capacity at 5°F	Max ⁴	BTU/H	5,990	9.000	12,240	12,780	15,600
	SEER	111021		18.0	18.0	18.0	18.0	18.0
	EER			12.0	9.9	12.0	10.5	8.6
Efficiency	HSPF			10	10	10	10.5	10
Liliolorioy	COP			3.55	3.61	3.3	3.32	3.05
	ENERGY STAR® Certified			No.	No	No No	No.	No.00
		Dry	CFM	170-237-321-399	170-237-321-399	272–335–420–533	328-431-530-625	353-431-530-702
	Air Flow Rate - Cooling (Quiet-Lo-Med-Hi-SHi)	Wet	CFM	134-201-286-364	134-201-286-364	237–300–385–498	295–388–477–562	318–388–477–632
	Air Flow Rate - Heating							
	(Quiet-Lo-Med-Hi-SHi)	Dry	CFM	170–237–321–406	170–237–321–406	247–304–367–463	307-431-530-625	346-448-579-702
	Sound Pressure Level	Cooling	dB(A)	22–30–37–43	22–30–37–45	32–38–44–49	30–37–42–47	33–38–44–50
Indoor Unit	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	22–30–37–43	22–30–37–43	30–35–40–46	30–37–42–47	32–38–44–50
mador onit		External Static Pressure In. W.G.			-	-	-	_
	Condensate Lift Mechanism	Max Distance	In. [mm]		-	-	-	_
	Dimensions	Н	In. [mm]	11-5/8 [295]	11-5/8 [295]	11-5/8 [295]	12 [305]	12 [305]
		W	In. [mm]	31-7/16 [798]	31-7/16 [798]	31-7/16 [798]	36-5/16 [923]	36-5/16 [923]
		D	In. [mm]	9-1/8 [232]	9-1/8 [232]	9-1/8 [232]	9-13/16 [250]	9-13/16 [250]
	Weight	lbs [kg]		22 [10.0]	22 [10.0]	22 [10.0]	28 [13.0]	28 [13.0]
	MCA	A		9.0	9.0	10.0	10.0	14.0
	MOCP	Α		15	15	15	15	15
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]
	Dimensions	W	In. [mm]	31-1/2 [800]	31-1/2 [800]	31-1/2 [800]	31-1/2 [800]	33-1/16 [840]
Outdoor Unit		D	In. [mm]	11-1/4 [286]	11-1/4 [286]	11-1/4 [286]	11-1/4 [286]	13 [330]
	Weight	lbs [kg]		73 [33.1]	73 [33.1]	81 [36.7]	81 [36.7]	121 [55]
	Air Flow Rate (Cooling/Heating)	CFM		1151/1225	1151/1225	1243/1229	1243/1229	1691/1691
	0 10 1	Cooling	dB(A)	46	49	49	50	54
	Sound Pressure Level	Heating	dB(A)	50	51	51	51	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Max. Length	ft [m]		65 [20]	65 [20]	65 [20]	65 [20]	100 [30]
	Max. Height	ft [m]		40 [12]	40 [12]	40 [12]	40 [12]	50 [15]
	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical	Recommended Breaker Size	Α		15	15	15	15	15
		1		R410A	R410A	R410A	R410A	R410A
Refrigerant Type								
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		14.0 to 115.0 [-10.0 to 46.0]				

Notes: AHRI Rated Conditions 80 DB, 67 WB // 95 DB, 75 WB ¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) ⁴Heating at 5°F (Indoor // Outdoor) (Rated data is determined at a fixed compressor speed) 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB

Indoor units receive power from outdoor units through field-supplied interconnected wiring.
Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

WMT 115V Model

The 115 volt single-zone WMT 115V Model is ideal for homes or businesses with electrical service restrictions.




Stylish Design with Flat Panel Front

A stylish flat panel design is employed for the front of the indoor unit. The simple look matches room aesthetics.



Quiet Operation

Quiet, relaxing space is within reach. Operational noise is a low 22dB(A) (09/12 classes). Operation is so silent you might even forget the air conditioner is on.

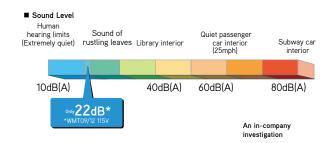


Econo Cool Energy-Saving Feature

Econo Cool is an intelligent temperature control feature that adjusts the amount of air directed towards the body based on the air-outlet temperature. The setting temperature can be raised by as much as 4° F without any loss in comfort, thereby realizing a 20% gain in energy efficiency. (Function only available during manual cooling operation.)


	Conventional	Econo Cool
Ambient Temperature	95° F	95° F
Set Temperature	77° F	81° F
Perceived Temperature	86° F	85° F

Econo Cool Mode

A comfortable room environment is maintained even when setting the temperature 4° F higher than the conventional cooling mode.



61 64 68 72 75 79 82



Air Filter

This filter can remove dust particles from the air.

Anti-allergy Enzyme Filter*

(*Optional)

This filter works to trap allergens such as bacteria and decompose them using enzymes retained in the filter.

12-hour Timer

Allows for one ON/OFF cycle during a 12-hour period.

Blue Fin Condenser

Anti-corrosion treatment is done to the heat exchanger of the outdoor units. This coating prevents the corrosion of the aluminum fins caused by salt in the air especially in coastal areas. (Corrosion of the heat exchanger will effect the efficiency and performance of the air conditioner.)

WMT 115V Model















Outdoor Unit



Remote Controller





















NAXSMT(09/12)A111A*







la da su l la la				NIAWARATOO A444 A+	NAVIMETAGAAAAA
Indoor Unit				NAXWMT09A111A*	NAXWMT12A111A*
Outdoor Unit	I			NAXSMT09A111A*	NAXSMT12A111A*
	Capacity	Rated ¹	BTU/H	9,000	12,000
	Capacity Range	Min-Max	BTU/H	3,800–10,000	3,800–12,000
Cooling	Power Input	Rated ¹	W	750	1,210
	Moisture Removal	Pints/h		1.5	2.5
	Sensible Heat Factor			0.820	0.770
	Capacity at 47°F	Rated ²	BTU/H	10,900	12,200
	Capacity Range	Min-Max	BTU/H	4,500–11,800	4,500–14,500
Heating	Power Input at 47°F	Rated ²	W	900	900
ricumg	Capacity at 17°F	Rated ³	BTU/H	6,700	7,600
	Capacity at 17 1	Max	BTU/H	7,200	9,000
	Capacity at 5°F	Max ⁴	BTU/H	5,990	7,440
	SEER			17.0	17.0
	EER			12.0	9.9
Efficiency	HSPF			9	9
	COP			3.55	3.61
	ENERGY STAR® Certified			No	No
	Air Flow Rate - Cooling	Dry	CFM	170–237–321–399	170–237–321–399
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	134–201–286–364	134–201–286–364
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	170–237–321–406	170–237–321–406
	Sound Pressure Level	Cooling	dB(A)	22–30–37–43	22–30–37–43
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	22–30–37–43	22–30–37–43
Indoor Unit	External Static Pressure		In. W.G.	-	_
	Condensate Lift Mechanism	Max Distance In. [mm]		-	_
	Dimensions	Н	In. [mm]	11-5/8 [295]	11-5/8 [295]
		W	In. [mm]	31-7/16 [798]	31-7/16 [798]
		D	In. [mm]	9-1/8 [232]	9-1/8 [232]
	Weight	lbs [kg]		22 [10]	22 [10]
	MCA	Α		12.0	14.0
	MOCP	Α		15	15
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]
	Dimensions	W	In. [mm]	31-1/2 [800]	31-1/2 [800]
Outdoor Unit		D	In. [mm]	11-1/4 [285]	11-1/4 [285]
	Weight	lbs [kg]		81 [37]	81 [37]
	Air Flow Rate (Cooling/Heating)	CFM		1105/1225	1105/1225
	Sound Pressure Level	Cooling	dB(A)	46	49
		Heating	dB(A)	46	50
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]
Piping		Indoor Drain	In. [mm]	5/8 [15.88]	5/8 [15.88]
	Max. Length	ft [m]		40 [12]	40 [12]
	Max. Height	ft [m]		65 [20]	65 [20]
Electrical	Outdoor-Indoor 5	V, ph, Hz		115, 1, 60	115, 1, 60
D (: :=	Recommended Breaker Size	А		15	15
Refrigerant Type				R410A 14.0 to 115.0	R410A 14.0 to 115.0
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		[-10.0 to 46.0]	[-10.0 to 46.0]
Operation Range	Heating	°F DB [°C DB]		-4.0 to 75.0 [-20.0 to 24.0]	-4.0 to 75.0 [-20.0 to 24.0]

Notes:

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB

70 DB, 60 WB // 5 DB, 4 WB

Conditions ⁴Heating at 5°F (Indoor // Outdoor) ⁵Indoor units receive power from outdoor units through field-supplied interconnected wiring. 6Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

WEL MODEL

The WEL Model is a basic 16 SEER INVERTER-driven heat pump.




Stylish Design with Flat Panel Front

A stylish flat panel design is employed for the front of the indoor unit. The simple look matches room aesthetics.



Quiet Operation

Quiet, relaxing space is within reach. Operational noise is a low 22dB(A) (09/12 classes). Operation is so silent you might even forget the air conditioner is on.

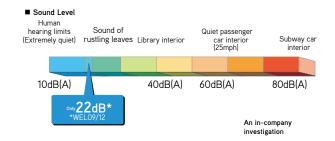


Econo Cool Energy-Saving Feature

Econo Cool is an intelligent temperature control feature that adjusts the amount of air directed towards the body based on the air-outlet temperature. The setting temperature can be raised by as much as 4° F without any loss in comfort, thereby realizing a 20% gain in energy efficiency. (Function only available during manual cooling operation.)


	Conventional	Econo Cool
Ambient Temperature	95° F	95° F
Set Temperature	77° F	81° F
Perceived Temperature	86° F	85° F

Econo Cool Mode

A comfortable room environment is maintained even when setting the temperature 4° F higher than the conventional cooling mode.



61 64 68 72 75 79 82



Air Filter

This filter can remove dust particles from the air.

Anti-allergy Enzyme Filter*

(*Optional)

This filter works to trap allergens such as bacteria and decompose them using enzymes retained in the filter.

12-hour Timer

Allows for one ON/OFF cycle during a 12-hour period.

Blue Fin Condenser

Anti-corrosion treatment is done to the heat exchanger of the outdoor units. This coating prevents the corrosion of the aluminum fins caused by salt in the air especially in coastal areas. (Corrosion of the heat exchanger will effect the efficiency and performance of the air conditioner.)

WEL Model



















12
Econo Cool



















Optional Contro U01A01
NAXWEL2

Indoor Unit				NAXWEL09A112A*	NAXWEL12A112A*	NAXWEL18A112A*	NAXWEL24A112A*
Outdoor Unit				NAXSEL09A112A*	NAXSEL12A112A*	NAXSEL18A112A*	NAXSEL24A112A*
	Capacity	Rated ¹	BTU/H	9,000	12,000	17,200	22,500
	Capacity Range	Min-Max	BTU/H	3,800–10,000	3,800–12,200	5,800–18,000	5,800-22,500
Cooling	Power Input	Rated ¹	w	820	1,330	1,720	2,810
	Moisture Removal	Pints/h		1.5	2.5	2.1	2.3
	Sensible Heat Factor			0.820	0.770	0.860	0.890
	Capacity at 47°F	Rated ²	BTU/H	10,900	12,200	18,000	26,000
	Capacity Range	Min-Max	BTU/H	4,500–11,800	4,500–14,500	5,400–20,900	5,400–26,000
	Power Input at 47°F	Rated ²	w	980	1,090	1,670	2,680
Heating		Rated ³	BTU/H	6,700	7,600	11,500	18,500
	Capacity at 17°F	Max	BTU/H	7,200	9,000	15,000	18,500
	Capacity at 5°F	Max ⁴	BTU/H	5,990	7,440	12,780	15,600
	SEER	1		16.0	16.0	16.0	16.0
	EER			11.0	9.0	10.0	8.0
Efficiency	HSPF			8.5	8.5	8.5	8.5
-	COP			3.25	3.28	3.16	2.84
	ENERGY STAR® Certified			No	No	No	No
	Air Flow Rate - Cooling	Dry	CFM	170-237-321-399	170-237-321-399	328-431-530-625	353-431-530-702
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	134–201–286–364	134-201-286-364	295–388–477–562	318-388-477-632
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	170-237-321-406	170-237-321-406	307-431-530-625	346-448-579-702
	Sound Pressure Level	Cooling	dB(A)	22–30–37–43	22–30–37–45	30–37–42–47	33–38–44–50
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	22–30–37–43	22-30-37-43	30–37–42–47	32–38–44–50
Indoor Unit	External Static Pressure			_	_	_	_
	Condensate Lift Mechanism	sate Lift Mechanism Max Distance In. [mm		_	_	_	_
		Н	In. [mm]	11-5/8 [295]	11-5/8 [295]	12 [305]	12 [305]
	Dimensions	W	In. [mm]	31-7/16 [798]	31-7/16 [798]	36-5/16 [923]	36-5/16 [923]
		D	In. [mm]	9-1/8 [232]	9-1/8 [232]	9-13/16 [250]	9-13/16 [250]
	Weight	lbs [kg]		22 [10]	22 [10]	28 [13]	28 [13]
	MCA	Α		9.0	9.0	10.0	14.0
	MOCP	Α		15	15	15	15
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]	34-5/8 [880]
	Dimensions	W	In. [mm]	31-1/2 [800]	31-1/2 [800]	33-1/16 [840]	31-1/16 [840]
Outdoor Unit		D	In. [mm]	11-1/4 [286]	11-1/4 [286]	13 [330]	13 [330]
	Weight	lbs [kg]		73 [33.1]	73 [33.1]	81 [36.7]	121 [54.9]
	Air Flow Rate (Cooling/Heating)	CFM		1151/1225	1151/1225	1243/1229	1691/1691
	Sound Pressure Level	Cooling	dB(A)	48	51	53	57
	Sound Pressure Level	Heating	dB(A)	50	51	51	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Max. Length	ft [m]		40 [12]	40 [12]	40 [12]	50 [15]
	Max. Height	ft [m]		65 [20]	65 [20]	65 [20]	100 [30]
Electrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
LIECTICAL	Recommended Breaker Size	А		15	15	15	15
Refrigerant Type				R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		32.0 to 115.0 [-10.0 to 46.0]			
Operation Range	Heating	°F DB [°C DB]		5.0 to 75.0 [-20.0 to 24.0]			

Notes:

Notes:
AHRI Rated Conditions

1 Cooling (Indoor // Outdoor)
1 Cated data is determined
2 Heating at 47°F (Indoor // Outdoor)
3 Heating at 47°F (Indoor // Outdoor)
4 Heating at 17°F (Indoor // Outdoor)
5 TO DB, 60 WB // 47 DB, 43 WB
4 To DB, 60 WB // 17 DB, 15 WB
5 TO DB, 60 WB // 17 DB, 15 WB
6 TO DB, 60 WB // 17 DB, 15 WB
7 TO DB, 60 WB // 17 DB, 15 WB
7 TO DB, 60 WB // 17 DB, 15 WB
8 To DB, 60 WB // 17 DB, 15 WB
9 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB // 17 DB, 15 WB
1 To DB, 60 WB /


FKS Model

High capacity, energy savings and a design that harmonizes with living spaces raise the value of your room to the next level.



Simple Flat Design

Uneven surfaces have been smoothed to provide a simple design with linear beauty, harmonized with all types of interiors.

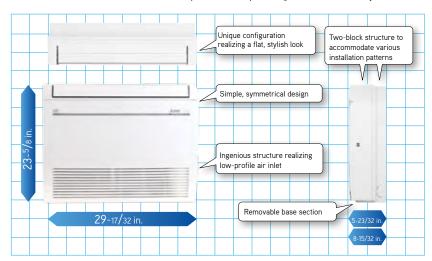





Multi-flow Vane

Three uniquely shaped vanes control the airflow and allow the freedom to customize comfort according to preferences.







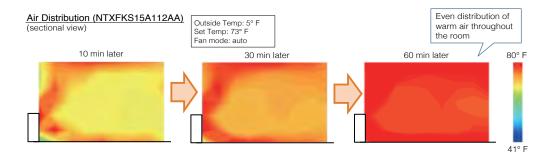

FKS Model

NAXFKS(09/12/15/18)A112A*




















































USNAF	,
	J

















USNAP
Optional













١.		
Ш	Pro-Heat	
Ц		

Indoor I Init				NAVEK00044404*	NAVEK 04.04.4.04.*	NAVEKO45A44OA*	NAVEKS1941194*
Indoor Unit Outdoor Unit				NAXFKS09A112A* NAXSPF09A112A*	NAXFKS12A112A* NAXSPF12A112A*	NAXFKS15A112A* NAXSPF15A112A*	NAXFKS18A112A* NAXSPF18A112A*
Outdoor Onit	Capacity	Rated ¹	BTU/H	9,000	12.000	15,000	17,000
		Min-Max	BTU/H	2,300–14,000	2,300–15,000	5,300–19,000	5,300–22,500
	Capacity Range		-				
Cooling	Power Input	Rated ¹	W	570	890	1,120	1,350
	Moisture Removal	Pints/h		1.4	2.7	3.9	4.4
	Sensible Heat Factor			0.790	0.700	0.660	0.650
	Capacity at 47°F	Rated ²	BTU/H	11,000	13,000	18,000	21,000
	Capacity Range	Min-Max	BTU/H	2,900–19,000	2,900–22,800	5,700–25,000	5,700–29,000
Heating	Power Input at 47°F	Rated ²	W	750	900	1,410	1,730
· iou.i.ig	Capacity at 17°F	Rated ³	BTU/H	7,500	8,800	12,000	12,800
	Capacity at 17 1	Max	BTU/H	13,400	14,800	20,500	23,000
	Capacity at 5°F	Max ⁴	BTU/H	11,000	13,000	18,000	21,000
	SEER			28.2	25.5	21.8	21.0
	EER			15.8	13.6	13.5	12.6
Efficiency	HSPF			13	12	11.6	11.3
	COP			4.3	4.2	3.7	3.5
	ENERGY STAR® Certified			Yes	Yes	Yes	Yes
	Air Flow Rate - Cooling	Dry	CFM	138-198-272-360-417	138–198–272–360–417	198-254-311-392-431	198-254-328-420-491
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	117–168–231–306–354	117-168-231-306-354	168-216-264-333-366	168-216-279-357-417
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	138-191-254-328-417	138–191–254–328–417	212-268-328-399-470	212–268–328–399–470
	Sound Pressure Level	Cooling	dB(A)	21–27–34–41–46	21–27–34–41–46	28-33-38-43-47	28-33-39-45-50
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	21-27-34-40-46	21–27–34–40–46	29-35-40-45-49	29-35-40-45-49
Indoor Unit	External Static Pressure	Static Pressure In. W.G.		-	_	_	_
	Condensate Lift Mechanism	Max Distance	In. [mm]		_	_	_
	Dimensions	Н	In. [mm]	23-5/8 [600]	23-5/8 [600]	23-5/8 [600]	23-5/8 [600]
		W	In. [mm]	29-17/32 [750]	29-17/32 [750]	29-17/32 [750]	29-17/32 [750]
		D	In. [mm]	8-15/32 [215]	8-15/32 [215]	8-15/32 [215]	8-15/32 [215]
	Weight	lbs [kg]		33 [15.0]	33 [15.0]	33 [15.0]	33 [15.0]
	MCA	Α		11.0	11.0	16.0	16.0
	MOCP	Α		15	15	20	20
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]	21-5/8 [880]	21-5/8 [880]
	Dimensions	W	In. [mm]	31-1/2 [800]	31-1/2 [800]	31-1/2 [840]	31-1/2 [840]
Outdoor Unit		D In. [mm]		11-1/4 [285]	11-1/4 [285]	11-1/4 [330]	11-1/4 [330]
	Weight	lbs [kg]		83 [38]	83 [38]	124 [56]	124 [56]
	Air Flow Rate (Cooling/Heating)	CFM		1074/1202	1074/1202	1653/1730	1653/1730
	Sound Pressure Level	Cooling	dB(A)	48	48	51	51
	Council Foodule Level	Heating	dB(A)	50	50	55	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
Piping		Indoor Drain	In. [mm]	19/32 O.D [15]	19/32 O.D [15]	19/32 O.D [15]	19/32 O.D [15]
	Max. Length	ft [m]		65 [20]	65 [20]	100 [30]	100 [30]
	Max. Height	ft [m]		40 [12]	40 [12]	50 [15]	50 [15]
Electrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Liosuloui	Recommended Breaker Size	Α		15	15	20	20
Refrigerant Type				R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		14.0 to 115.0 [-10.0 to 46.0]			
Operation Range	Heating	°F DB [°C DB]		-13.0 to 75.0 [-25.0 to 24.0]			

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed) Conditions

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) ⁴Heating at 5°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

Konnect Series

Konnect Series heat pump and Pro-Heat outdoor units achieve high energy-saving performance as well as heating capacity and all the combinations are ENERGY STAR® qualified. For an attractive and optimum use of indoor space, you can choose the indoor unit that best matches your needs.





Konnect Series Compatibility

Outdoor Unit Capacity KBTU/H		,	9	1	2	1	5	1	8	2	24	3	0	3	6
Model	Туре	HP	Pro-Heat												
CKS	2' x 2' cassette	•	•	•	•	•	•	•	•						
DKS	Low static ducted	•	•	•	•	•	•	•	•						
PEAD	Mid static ducted	•	•	•	•	•	•	•	•	•		•		•	
AMT	Multi-position Air Handler			•	•			•	•	•		•		•	
UKS	EZ FIT™ Recessed Ceiling Cassette	•	•	•	•			•	•						

HP: Heat Pump

Pro-Heat Hyper-Heating

Pro-Heat Inverter



The H2i® models provide heating even when it's -13° F (-25° C) outdoor ambient, producing up to 100% heating capacity at 5° F (-15° C). These units offer year-round comfort even in extreme climates.

(0° C)

Operation guaranteed at -13° F, 100% heating capacity at 5° F Pro-Heat Konnect Series Standard Heat Pump 100% heating capacity as low as 5° F (-15° C) 100% 100%

(-15° C)

(-20° C)

Outdoor Air Temperature

19° F (-7° C)

Heating Performance at Low Temperatures

NAXSKI	109A112	4 *			N/
COP at	CKS	DKS	PEAD	UKS	CC
47° F	3.90	2.80	3.80	4.10	4
17° F	2.56	2.20	2.56	2.76	17
5° F	1.34	1.59	1.67	1.67	5

NAXSKH12A112A*								
	COP at	CKS	DKS	PEAD	AMT	UKS		
	47° F	3.40	3.90	3.90	3.80	3.80		
	17° F	2.38	2.56	2.72	2.61	2.54		
	5° F	1.83	2.19	2.09	1.69	1.57		

NAXSKHIDAIIZA"									
COP at	CKS	DKS	PEAD						
47° F	2.60	2.70	3.00						
17° F	1.91	2.15	2.29						
5° F	1.84	1.88	1.81						

NAXSKH18A112A*										
	COP at	CKS	DKS	PEAD	AMT	UKS				
	47° F 2.70	3.40	3.30	3.30	3.00					
	17° F	17° F 2.20	2.52	2.49	2.32	2.42				
	5° F	1.44	1.75	1.66	1.75	1.39				

Built-in Base Heater

-13° F (-25° C)

The base heater restricts lowered capacity and operation shutdowns caused by the drain water freezing. This supports stable operation in low-temperature environments.

Operation Guaranteed at Outside Temperature of -13° F (-25° C)







With base heater

Compact and Powerful Compressor

A special manufacturing technology, Heat Caulking Fixing Method, has been introduced to reduce compressor size while maintaining a high compressor output. This technology enables the installation of a powerful compressor in compact outdoor units. As a result, excellent heating performance is achieved when operating in cold outdoor environments.

Compressor using conventional method (Arc spot-welded method)



Compressor using Heat Caulking Fixing Method




UKS Model

Introducing EZ FITTM ceiling cassette with streamlined interior dimensions and a sharp, sleek appearance.



Slim Design

Industry leading slim body realized a simple design with linear beauty.

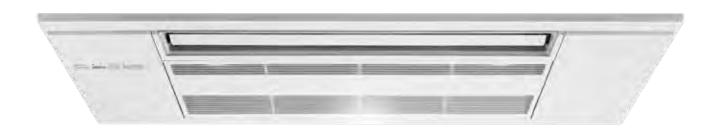

Ceiling Mounted

Installing the ceiling-mounted EZ FIT Model unit in a room creates a more spacious feel that enhances room comfort. This overhead format is also an excellent solution when lighting equipment is installed at the center of the room and fixtures such as book shelves are mounted on wall surfaces.



Slim Body

The new units are designed with a slim body (only 7-5/16"), ensuring easy installation even when low ceiling cavities limit installation space. The need for ceiling cavity service space is also eliminated, further reducing the dimensions required for installation.




Set Airflow According to Ceiling Height

Dual-level airflow selection is engineered to accommodate specific ceiling heights. This is a key feature for adjusting airflow effectively when it is either too strong or too weak due to being mismatched with the height of the ceiling.

	09	12	18
Standard	7-7/8 ft.	7-7/8 ft.	7-7/8 ft.
High ceiling	8-7/8 ft.	8-7/8 ft.	8-7/8 ft.

Auto Vane Control

Outlet vanes can be moved left and right, and up and down using the remote controller. This improved airflow control feature solves the problem of drafts.

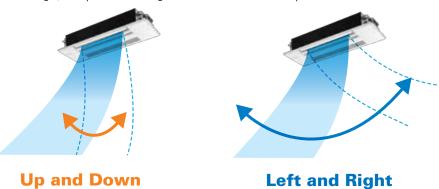

*Only available when Econo Cool is set.

Weekly Timer Function

prevent forgetting to turn off the unit and eliminate temperature setting adjustments.

Easily set desired temperatures and operation ON/OFF times to match lifestyle patterns. Reduce wasted energy consumption by using the timer to

■ Example Operation Pattern (Winter/Heating mode)

	Mon.	Tues.	Wed.	Thurs.	Fri.	Sat.	Sun.	
	ON 68°	°F ON 68°F	ON 68°F	ON 68°F	ON 68°F	ON 68°F	ON 68°F	
5:00 am			Automatically o	n at wake-up time				
8:00 am								
10:00 am	OFF	OFF	OFF	OFF	OFF	ON 64°F	ON 64°F	
12:00 AM			Automatically turned off during wo	rk hours		Midday is warmer, so the temperature is set lower		
2:00 pm						30 the temperature is se	Lionoi	
4:00 pm								
Б:00 _{РМ}	ON 72°	F ON 72°F	ON 72°F	ON 72°F	ON 72°F	ON 72°F	ON 72°F	
8:00 pm		Auton	natically turns on, synchronized with	arrival at home		Automatically raises temperatumatch time when outside-air to		
10:00 PM						materi time when outside-air ti	emperature is row	
(during	ON 64°	°F ON 64°F	ON 64°F	ON 64°F	ON 64°F	ON 64°F	ON 64°F	
sleeping hours)			Automatically lowers ter	nperature at bedtime for energy	-saving operation at night	•		


Settings

Pattern Settings: Input up to four settings for each day

Settings: • Start/Stop operation • Temperature setting *The operation mode cannot be set.

■ Easy set-up using dedicated buttons



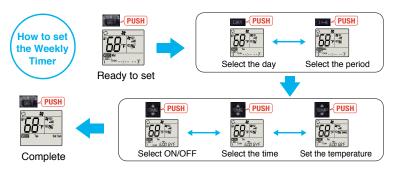

- Start by pushing the SET button and follow the instructions to set the desired
 patterns. Once all of the desired patterns are input, point the top end of the remote
 controller at the indoor unit and push the SET button one more time. (Push the
 SET button only after inputting all of the desired patterns into the remote controller
 memory. Pushing the CANCEL button will end the set-up process without sending
 the operation patterns to the indoor unit).
- It takes a few seconds to transmit the Weekly Timer operation patterns to the indoor unit. Please continue to point the remote controller at the indoor unit until all data has been sent.

Easy Installation


Industry Leading Slim Body

The EZ FIT™ can be installed within standard joists that span 16 inches on center. There is no need for large-scale construction, such as the cutting of the joist.




Temporary hanging hook

Work efficiency has improved during installation.

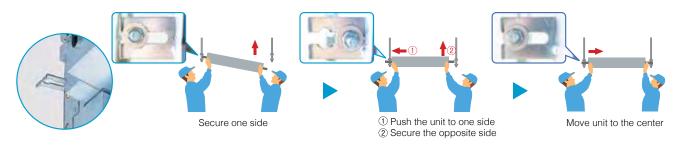

Drain Piping Supporters + Drain Cover


Industry leading slim body realized a simple design with linear beauty.

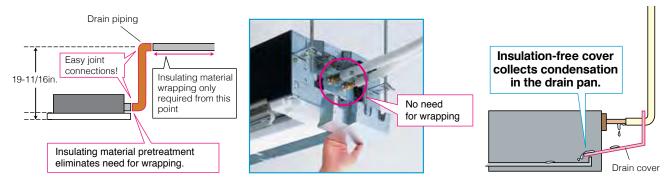

Wireless Interface Installation

(Optional)

The indoor unit panel is equipped with a Wireless Interface pocket, contributing to the beautiful appearance, easy installation and maintenance.

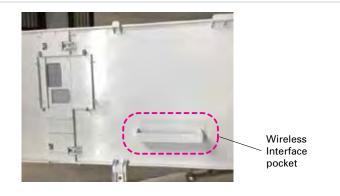

UKS Model





Indoor Unit				NAXUKS09A112A*	NAXUKS12A112A*	NAXUKS18A112A*
Outdoor Unit				NAXSKS09A112A*	NAXSKS12A112A*	NAXSKS18A112A*
	Capacity	Rated ¹	BTU/H	9,000	12,000	18,000
	Capacity Range	Min-Max	BTU/H	3,600–9,000	3,900–12,000	6,600–18,000
ooling	Power Input	Rated ¹	W	710	960	1,440
	Moisture Removal	Pints/h		1.5	2.8	5.3
	Sensible Heat Factor			0.820	0.740	0.670
	Capacity at 47°F	Rated ²	BTU/H	12,000	15,400	20,000
	Capacity Range	Min-Max	BTU/H	4,010–13,000	4,600–17,000	8,200–22,800
	Power Input at 47°F	Rated ²	W	860	1,300	1,170
leating		Rated ³	BTU/H	7,700	9,900	13,100
	Capacity at 17°F	Max	BTU/H	7,700	9,900	13,100
	Capacity at 5°F	Max ⁴	BTU/H	6,100	7,900	10,700
	SEER			19.5	19.8	22.3
	EER			12.6	12.5	12.5
Efficiency	HSPF			13.3	12.1	12.4
•	COP			4.0	3.4	3.3
	ENERGY STAR® Certified			Yes	Yes	Yes
	Air Flow Rate - Cooling	Dry	CFM	212-254-283-311	212–258–297–332	212-293-346-403
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	180-216-240-264	180–219–252–282	180-249-294-343
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	212–247–290–325	212–272–311–350	212–311–364–417
	Sound Pressure Level	Cooling	dB(A)	27–31–34–38	27–32–36–40	29-36-41-47
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	26–29–34–37	26–32–36–40	26-37-42-48
ndoor Unit	External Static Pressure		In. W.G.	_	_	_
	Condensate Lift Mechanism	Max Distance	In. [mm]	19-11/16 [500]	19-11/16 [500]	19-11/16 [500]
		Н	In. [mm]	7-5/16 [185]	7-5/16 [185]	7-5/16 [185]
	Dimensions	w	In. [mm]	43-3/8 [1102]	43-3/8 [1102]	43-3/8 [1102]
		D	In. [mm]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]
	Weight	lbs [kg]		34 [15.5]	34 [15.5]	34 [15.5]
	MCA	Α		9.0	9.0	14.0
	MOCP	Α		15	16	24
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]
	Dimensions	W	In. [mm]	31-1/2 [800]	31-1/2 [800]	33-1/16 [840]
Outdoor Unit		D	In. [mm]	11-1/4 [285]	11-1/4 [285]	13 [330]
JULUUUI UIIIL	Weight	lbs [kg]		81 [37]	81 [37]	127 [58]
	Air Flow Rate (Cooling/Heating)	CFM		1228/1172	1228/1172	1691/1691
		Cooling	dB(A)	48	49	54
	Sound Pressure Level	Heating	dB(A)	50	51	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
iping		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
•	Max. Length	ft [m]		65 [20]	65 [20]	100 [30]
	Max. Height	ft [m]		40 [12]	40 [12]	50 [15]
	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
lectrical	Recommended Breaker Size			15	15	15
tefrigerant Type		1		R410A	R410A	R410A
Guaranteed	Cooling ⁶	°F DB [°C DB]		14.0 to 115.0 [-10.0 to 46.0]	14.0 to 115.0 [-10.0 to 46.0]	14.0 to 115.0 [-10.0 to 46.0]
Temperature Operation Range	Heating	°F DB [°C DB]		-4.0 to -75.0 [-20.0 to 24.0]	-4.0 to -75.0 [-20.0 to 24.0]	-4.0 to -75.0 [-20.0 to 24.0]

Notes:

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) ⁴Heating at 5°F (Indoor // Outdoor) 80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB AHRI Rated Conditions (Rated data is determined at a fixed compressor speed) Conditions

Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

UKS Model





Indoor Unit				NAXUKS09A112A*	NAXUKS12A112A*	NAXUKS18A112A*
Outdoor Unit				NAXSKH09A112A*	NAXSKH12A112A*	NAXSKH18A112A*
	Capacity	Rated ¹	BTU/H	9,000	12,000	16,700
	Capacity Range	Min-Max	BTU/H	4,800–9,000	5,270–12,000	8,740–16,700
Cooling	Power Input	Rated 1	W	720	940	1,335
	Moisture Removal	Pints/h		1.8	3.1	5.1
	Sensible Heat Factor			0.780	0.710	0.660
	Capacity at 47°F	Rated ²	BTU/H	12,000	15,000	18,600
	Capacity Range	Min-Max	BTU/H	8,300–14,000	7,800–18,000	8,500–22,000
I Iti	Power Input at 47°F	Rated ²	W	840	1,130	1,780
Heating	0	Rated ³	BTU/H	6,600	9,100	11,800
	Capacity at 17°F	Max	BTU/H	12,000	15,000	18,600
	Capacity at 5°F	Max ⁴	BTU/H	12,000	15,000	18,600
	SEER			18.9	19.0	18.8
	EER			12.5	12.7	12.5
Efficiency	HSPF			11	10.2	10
	COP			4.1	3.8	3.0
	ENERGY STAR® Certified			Yes	Yes	Yes
	Air Flow Rate - Cooling	Dry	CFM	212–254–283–311	212–258–297–332	212-293-346-403
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	180-216-240-264	180-219-252-282	180-249-294-343
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	212–247–290–325	212–272–311–350	212–311–364–417
	Sound Pressure Level	Cooling	dB(A)	27–31–34–38	27–32–36–40	29–36–41–47
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	26-29-34-37	26-32-36-40	26-37-42-48
Indoor Unit	External Static Pressure		In. W.G.	_	_	_
	Condensate Lift Mechanism	Max Distance	In. [mm]	19-11/16 [500]	19-11/16 [500]	19-11/16 [500]
		Н	In. [mm]	7-5/16 [185]	7-5/16 [185]	7-5/16 [185]
	Dimensions	W	In. [mm]	43-3/8 [1102]	43-3/8 [1102]	43-3/8 [1102]
		D	In. [mm]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]
	Weight	lbs [kg]		34 [15.5]	34 [15.5]	34 [15.5]
	MCA	Α		14.0	14.0	17.0
	MOCP	Α		24	24	31
		Н	In. [mm]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]
	Dimensions	W	In. [mm]	38-1/16 [840]	33-1/16 [840]	33-1/16 [840]
Outdoor Unit		D	In. [mm]	13 [330]	13 [330]	13 [330]
Catacor Crit	Weight	lbs [kg]		129 [58.5]	129 [58.5]	131 [59.5]
	Air Flow Rate (Cooling/Heating)	CFM		1,691/1,691	1,691/1,691	2,020/1,930
	Sound Pressure Level	Cooling	dB(A)	54	54	55
	Sound Flessule Level	Heating	dB(A)	55	55	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
Piping		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
	Max. Length	ft [m]		65 [20]	65 [20]	100 [30]
	Max. Height	ft [m]		40 [12]	40 [12]	50 [15]
Electrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Licolitoai	Recommended Breaker Size	-		15	15	20
Refrigerant Type				R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		14.0 to 115.0 [-10.0 to 46.0]	14.0 to 115.0 [-10.0 to 46.0]	14.0 to 115.0 [-10.0 to 46.0]
Operation Range	Heating	°F DB [°C DB]		-13.0 to -75.0 [-25.0 to 24.0]	-13.0 to -75.0 [-25.0 to 24.0]	-13.0 to -75.0 [-25.0 to 24.0]

Notes:

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed) Conditions

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

AHRI Rated Conditions

1 Cooling (Indoor // Outdoor)

4 Heating at 47°F (Indoor // Outdoor)

6 F 70 DB, 60 WB // 47 DB, 43 WB

at a fixed compressor speed)

3 Heating at 17°F (Indoor // Outdoor)

6 F 70 DB, 60 WB // 47 DB, 43 WB

at a fixed compressor speed)

4 Heating at 5°F (Indoor // Outdoor)

7 TO DB, 60 WB // 17 DB, 15 WB

Conditions

4 Heating at 5°F (Indoor // Outdoor)

7 TO DB, 60 WB // 5 DB, 4 WB

4 Indoor units receive power from outdoor units through field-supplied interconnected wiring.

4 Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

AMT Model


The multi-position air handler is well-suited for supplemental or replacement applications, and allows for effective and efficient air conditioning as airflow strength can be set to ensure any desired comfort level.





Slim Design

Industry leading quality and compact design.

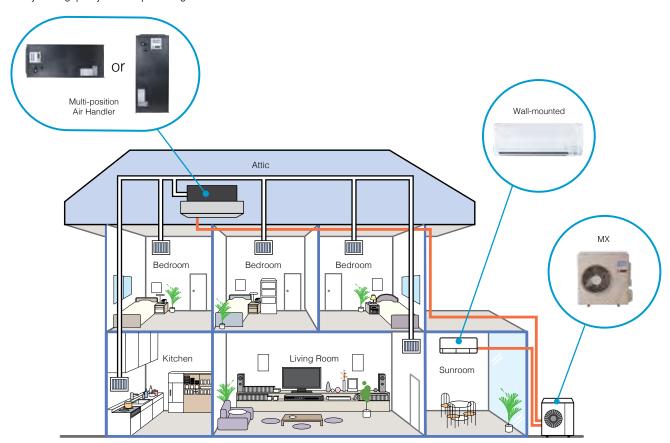

Flexibility

The AMT air handler is truly multi-positional unit offering up, down*, left or right airflow, making it ideal for tight and unique spaces.

*Downflow kit required for downflow installations

Quiet

The DC motor ensures quiet and efficient operation year round.

Small Footprint

The AMT's compact design makes it possible to replace any kind of existing furnace or air handler, and can also be hidden in a closet or basement corner. The single-zone and mutli-zone outdoor units are compact as well, since up to eight indoor units can be connected to one outdoor unit.

AMT Model

Indoor Unit

NAXAMT(12/18/24/30/36)A112A*



Outdoor Unit



NAXSKS(18/24/30/36)A112A*

NAXSKS12A112A*

 * To confirm compatibility with the MX Model multizone system, refer to MX Model page.





















ndoor Unit				NAXAMT12A112A*	NAXAMT18A112A*	NAXAMT24A112A*	NAXAMT30A112A*	NAXAMT36A112A
Outdoor Unit				NAXSKS12A112A*	NAXSKS18A112A*	NAXSKS24A112A*	NAXSKS30A112A*	NAXSKS36A112A
	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	27,000	33,000
	Capacity Range	Min-Max	BTU/H	4,300-12,000	6,200–18,000	12,400–24,000	13,500–27,000	11,600–33,000
ooling	Power Input	Rated ¹	W	940	1,360	1,920	2,160	3,720
_	Moisture Removal	Pints/h		1.2	2.4	4.1	2.4	4.7
	Sensible Heat Factor	1		0.890	0.850	0.810	0.900	0.840
	Capacity at 47°F	Rated ²	BTU/H	15,000	21,600	25,000	30,000	33,500
	Capacity Range	Min-Max	BTU/H	4,700-16,700	8,300–26,000	14,600–28,000	12,640-33,000	13,260–36,000
	Power Input at 47°F	Rated ²	W	1,210	1,600	1,910	2,060	3,030
eating		Rated ³	BTU/H	9,900	14,000	14,600	21,400	23,200
	Capacity at 17°F	Max	BTU/H	9,900	14,000	14,600	21,400	23,200
	Capacity at 5°F	Max ⁴	BTU/H	7,800	12,200	_	_	_
	SEER	-		18.0	18.0	18.0	18.0	16.0
	EER			12.7	13.2	12.5	12.5	8.8
fficiency	HSPF			12.10	12.60	10.40	13.60	11.70
	COP			3.6	3.9	3.8	4.2	3.2
	ENERGY STAR® Certified			Yes	Yes	Yes	Yes	No.2
	Air Flow Rate - Cooling	Dry	CFM	278–381–448	471–573–675	515–625–735	613–744–875	767–910–910
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	270-301-440	4/1-5/5-0/5	313-023-733	013-744-073	707-310-310
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	278–381–448	471–573–675	515–625–735	613–744–875	767–910–910
	Sound Pressure Level	Cooling	dB(A)	29–36–39	33–36–41	30–34–38	32–46–40	35–39–43
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	29–36–39	33–36–41	30–34–38	32–46–40	35–39–43
door Unit	External Static Pressure	ricating	In. W.G.	0.3-0.5-0.8	0.3-0.5-0.8	0.3-0.5-0.8	0.3–0.5–0.8	0.3-0.5-0.8
	Condensate Lift Mechanism	Max Distance	-	0.0 0.0 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.0 0.0 0.0
	Condensate Lift Wednamon	Н	In. [mm]	39-13/16 [1011]	39-13/16 [1011]	39-13/16 [1011]	43-3/4 [1111]	43-3/4 [1111]
	Dimensions	W	In. [mm]	17 [432]	17 [432]	17 [432]	21 [533]	21 [533]
	Dimensions	D	In. [mm]	21-5/8 [548]	21-5/8 [548]	21-5/8 [549]	21-5/8 [549]	21-5/8 [549]
	Weight	lbs [kg]	[]	93 [42]	93 [42]	93 [42]	119 [54]	119 [54]
	MCA	A		9.0	14.0	17.0	17.0	17.0
	MOCP	A		16	24	31	31	31
	WOOI	Н	In. [mm]	21-5/8 [550]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]
	Dimensions	W	In. [mm]	31-1/2 [800]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]
	Difficusions	D	In. [mm]	11-1/4 [285]	13 [330]	13 [330]	13 [330]	13 [330]
utdoor Unit	Moight	lbs [kg]	III. [IIIIII]			129 [58.5]	129 [58.5]	129 [58.5]
	Weight Air Flow Rate (Cooling/Heating)	CFM		81 [37] 1228/1172	127 [58] 1691/1691	2020/1930	2020/1930	2020/1930
	(Cooling/Heating)	Cooling	dB(A)	49	54	55	55	55
	Sound Pressure Level	Heating	dB(A)	51	55	55	55	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D.)	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
ping	Diameter	Indoor Drain	In. [mm]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]
ping	May Langth		in. pinni					
	Max. Length	ft [m]		65 [20]	100 [30]	100 [30]	100 [30]	100 [30]
	Max. Height	ft [m]		40 [12]	50 [15]	100 [30]	100 [30]	100 [30]
ectrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
	Recommended Breaker Size	А		15	15	20	20	20
efrigerant Type	T.			R410A	R410A	R410A	R410A	R410A
Guaranteed emperature	Cooling ⁶	°F DB [°C DB]		14.0 to 115.0 [-10.0 to 46.0]				
remperature Operation Range	Heating	°F DB [°C DB]		-4.0 to -75.0 [-20.0 to 24.0]	-4.0 to -75.0 [-20.0 to 24.0]	14.0 to -75.0 [-10.0 to 24.0]	14.0 to -75.0 [-10.0 to 24.0]	14.0 to -75.0 [-10.0 to 24.0]

AHRI Rated Conditions
(Rated data is determined at a fixed compressor speed)
Conditions

Notes:
AHRI Rated Conditions

1 Cooling (Indoor // Outdoor)
1 F 80 DB, 67 WB // 95 DB, 75 WB

(Rated data is determined
1 Heating at 47°F (Indoor // Outdoor)
1 Heating at 47°F (Indoor // Outdoor)
1 Heating at 17°F (Indoor // Outdoor)
2 T 70 DB, 60 WB // 47 DB, 43 WB

at a fixed compressor speed)
3 Heating at 17°F (Indoor // Outdoor)
4 Heating at 5°F (Indoor // Outdoor)
5 T 70 DB, 60 WB // 17 DB, 15 WB

Conditions
4 Heating at 5°F (Indoor // Outdoor)
5 T 70 DB, 60 WB // 5 DB, 4 WB

Indoor units receive power from outdoor units through field-supplied interconnected wiring.
4 Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

AMT Model

Indoor Unit

Outdoor Unit NAXSKH(12/18)A112A*

NAXAMT12/18A112A*

 $\mbox{\ensuremath{^{\star}}}$ To confirm compatibility with the MX Model multizone system, refer to MX Model page.





















Indoor Unit				NAXAMT12A112A*	NAXAMT18A112A*
Outdoor Unit				NAXSKH12A112A*	NAXSKH18A112A*
Outdoor Onit	Capacity	Rated ¹	BTU/H	12,000	18,000
	Capacity Range	Min-Max	BTU/H	5,600–12,000	9,360–18,000
Cooling	Power Input	Rated ¹	W	860	1,440
Cooming	Moisture Removal	Pints/h	**	0.8	1.1
	Sensible Heat Factor			0.920	0.930
	Capacity at 47°F			15.000	21,600
	Capacity Range	Min-Max	BTU/H	7,700–18,000	8,800–28,000
	Power Input at 47°F	Rated ²	W	1,130	1,880
Heating	1 ower input at 47 1	Rated ³	BTU/H	8,900	14,300
	Capacity at 17°F	Max	BTU/H	15,000	21,600
	Capacity at 5°F	Max ⁴	BTU/H	15,000	21,600
	SEER	IVIUX	БТОЛТ	19.0	18.4
	EER			13.9	12.5
Efficiency	HSPF			10.2	10.4
Linciency	COP			3.8	3.3
	ENERGY STAR® Certified			Yes	Yes
		Dry	CFM	278–381–448	471–573–675
	Air Flow Rate - Cooling (Quiet-Lo-Med-Hi-SHi)	Wet	CFM		——————————————————————————————————————
	Air Flow Rate - Heating				
	(Quiet-Lo-Med-Hi-SHi)	Dry	CFM	278–381–448	471–573–675
	Sound Pressure Level	Cooling	dB(A)	29–36–39	33–36–41
Indoor Unit	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	29–36–39	33–36–41
mador ome			In. W.G.	0.3–0.5–0.8	0.3-0.5-0.8
	Condensate Lift Mechanism	Max Distance	- 1	_	
		Н	In. [mm]	39-13/16 [1011]	39-13/16 [1011]
	Dimensions	W	In. [mm]	17 [432]	17 [432]
		D	In. [mm]	21-5/8 [548]	21-5/8 [548]
	Weight	lbs [kg]		93 [42]	93 [42]
	MCA	Α		14.0	17.0
	MOCP	Α		24	31
		Н	In. [mm]	34-5/8 [880]	34-5/8 [880]
	Dimensions	W	In. [mm]	33-1/16 [840]	33-1/16 [840]
Outdoor Unit		D	In. [mm]	13 [330]	13 [330]
	Weight	lbs [kg]		129 [58.5]	131 [59.5]
	Air Flow Rate (Cooling/Heating)	CFM		1,691/1,691	2,020/1,930
	Sound Pressure Level	Cooling	dB(A)	54	55
	Sound i ressure Level	Heating	dB(A)	55	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	1/2 [12.7]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]
Piping		Indoor Drain	In. [mm]	3/4 [19.05]	3/4 [19.05]
	Max. Length	ft [m]		65 [20]	100 [30]
	Max. Height	ft [m]		40 [12]	50 [15]
Electrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60
Licotifical	Recommended Breaker Size	Recommended Breaker Size A		15	20
Refrigerant Type				R410A	R410A
Guaranteed	Cooling ⁶	°F DB [°C DB]		14.0 to 115.0 [-10.0 to 46.0]	14.0 to 115.0 [-10.0 to 46.0]
Temperature Operation Range	Heating °F DB [°C DB]			-13.0 to -75.0 [-25.0 to 24.0]	-13.0 to -75.0 [-25.0 to 24.0]

Notes:

Notes:
AHRI Rated Conditions

1 Cooling (Indoor // Outdoor)
1 F 80 DB, 67 WB // 95 DB, 75 WB

(Rated data is determined
2 Heating at 47°F (Indoor // Outdoor)
3 Heating at 17°F (Indoor // Outdoor)
4 Heating at 17°F (Indoor // Outdoor)
5 T 70 DB, 60 WB // 47 DB, 43 WB

at a fixed compressor speed)
4 Heating at 5°F (Indoor // Outdoor)
5 T 70 DB, 60 WB // 17 DB, 15 WB

Conditions
4 Heating at 5°F (Indoor // Outdoor)
5 T 70 DB, 60 WB // 5 DB, 4 WB

Indoor units receive power from outdoor units through field-supplied interconnected wiring.

4 Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

CKS Model

Compact, lightweight ceiling cassette units with 4-way air outlets provide maximum comfort by evenly distributing airflow throughout the entire room.




Flexibility

The attractive CKS Model ceiling cassette units offer a slim width and a 4-way air outlet. The size and shape are a perfect match for ceilings made using 2'x2' construction and its light weight package makes installation easy.



■ NAXCKS12A112A*

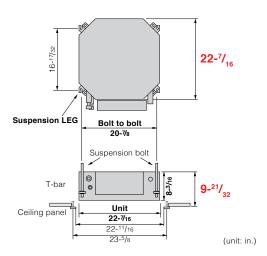


* Access door is required

Fresh-air Intake

A duct hole is provided in the main body, making it possible to intake fresh air from outside.

■ Intake-air volume

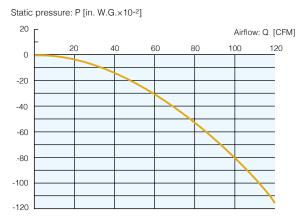

Note: Fresh-air intake amount should be 20% or less of whole air amount to prevent dew dripping. Booster fan required.

CKS Model

























Fresh-air Intake	Long Life	Check!	AUTO VANE	SWING	Q ⇔ Q aco	Auto Restart	Low Temp Cooling	Optional	Group Control Optional	M-NET connection Optional	USNAP	Optional	Optional	T-STAT Optional
MX	Drain Lift Up	Flare connection	Self	Failure Becall										

Indoor Unit				NAXCKS09A112A*	NAXCKS12A112A*	NAXCKS15A112A*	NAXCKS18A112A*
Outdoor Unit				NAXSKS09A112A*	NAXSKS12A112A*	NAXSKS15A112A*	NAXSKS18A112A*
	Capacity	Rated ¹	BTU/H	9,000	12,000	14,100	17,700
	Capacity Range	Min-Max	BTU/H	3,600–9,000	3,900–12,000	5,100–14,100	6,100–17,700
Cooling	Power Input	Rated ¹	W	670	900	1,150	1,410
	Moisture Removal	Pints/h		1.0	2.8	3.2	4.7
	Sensible Heat Factor			0.870	0.740	0.750	0.710
	Capacity at 47°F	Rated ²	BTU/H	11,000	13,000	18,000	19,700
	Capacity Range	Min-Max	BTU/H	4,010–12,000	4,800–13,000	5,100-19,100	8,400–20,900
	Power Input at 47°F	Rated ²	W	4,010	4,800	5,100	8,400
Heating		Rated ³	BTU/H	6,900	8,900	11,900	12,900
	Capacity at 17°F	Max	BTU/H	6,900	8,900	11,900	12,900
	Capacity at 5°F	Max ⁴	BTU/H	5,600	6,100	8,900	9,800
	SEER			22.4	22.0	19.8	20.7
	EER			13.4	13.3	12.2	12.5
Efficiency	HSPF			12.2	11.4	11.2	11.6
,	COP			3.9	2.9	3.0	3.1
	ENERGY STAR® Certified			Yes	Yes	No	Yes
	Air Flow Rate - Cooling	Dry	CFM	230–265–300	230–265–335	245–315–405	300-420-475
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	207–239–270	207–252–302	221–284–365	270–378–429
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	230–265–335	230–265–335	245–315–405	300–420–475
	Sound Pressure Level	Cooling	dB(A)	25–28–31	25–30–34	27–34–39	32-40-43
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	25–28–31	25–30–34	27–34–39	32-40-43
Indoor Unit	External Static Pressure		In. W.G.	_	_	_	_
	Condensate Lift Mechanism	Max Distance	In. [mm]	33 [850]	33 [850]	33 [850]	33 [850]
		Н	In. [mm]	9-21/32 [245]	9-21/32 [245]	9-21/32 [245]	9-21/32 [245]
	Dimensions	W	In. [mm]	22-7/16 [570]	22-7/16 [570]	22-7/16 [570]	22-7/16 [570]
		D	In. [mm]	22-7/16 [570]	22-7/16 [570]	22-7/16 [570]	22-7/16 [570]
	Weight	lbs [kg]		31 [13.9]	31 [13.9]	31 [13.9]	31 [13.9]
	MCA	A		9.0	9.0	10.0	14.0
	MOCP	Α		15	16	18	24
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]
	Dimensions	W	In. [mm]	31-1/2 [800]	31-1/2 [800]	31-1/2 [800]	33-1/16 [840]
Outdoor Unit		D	In. [mm]	11-1/4 [285]	11-1/4 [285]	11-1/4 [285]	13 [330]
Outdoor Unit	Weight	lbs [kg]		81 [37]	81 [37]	81 [37]	127 [58]
	Air Flow Rate (Cooling/Heating)	CFM		1228/1172	1228/1172	1243/1229	1691/1691
	i	Cooling	dB(A)	48	49	49	54
	Sound Pressure Level	Heating	dB(A)	50	51	51	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
Piping		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
-	Max. Length	ft [m]	- 1	65 [20]	65 [20]	65 [20]	100 [30]
	Max. Height	ft [m]		40 [12]	40 [12]	40 [12]	50 [15]
	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical				15	15	15	15
Refrigerant Type				R410A	R410A	R410A	R410A
Guaranteed	Cooling ⁶	°F DB [°C DB]		14.0 to 115.0 [-10.0 to 46.0]			
Temperature Operation Range	Heating	°F DB [°C DB]		-4.0 to -75.0 [-20.0 to 24.0]			

Notes:

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) ⁴Heating at 5°F (Indoor // Outdoor) 80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB AHRI Rated Conditions (Rated data is determined at a fixed compressor speed) Conditions

Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

CKS Model

















Outdoor Unit



NAXSKH(09/12/15/18)A112A*

*optional PAR-SL100A-E *optional AAR-40MAAU



*optional *optional PAC-YT53CRAU-J PAR-CT01MAU-SB



Remote Controller



Panel













































П	Pro-Heat
,	

ndoor Unit				NAXCKS09A112A*	NAXCKS12A112A*	NAXCKS15A112A*	NAXCKS18A112A*
Outdoor Unit				NAXSKH09A112A*	NAXSKH12A112A*	NAXSKH15A112A*	NAXSKH18A112A*
	Capacity	Rated 1	BTU/H	9,000	12,000	13,700	16,800
	Capacity Range	Min-Max	BTU/H	4,800–9,000	5,070–12,000	8,500–13,700	9,010–16,800
ooling	Power Input	Rated ¹	W	600	940	1,095	1,340
	Moisture Removal	Pints/h		1.9	3.1	3.4	4.2
	Sensible Heat Factor			0.770	0.710	0.720	0.720
	Capacity at 47°F	Rated ²	BTU/H	11,000	13,800	16,400	18,800
	Capacity Range	Min-Max	BTU/H	7,400–13,200	7,800–14,500	8,300-19,000	8,300–20,000
	Power Input at 47°F	Rated ²	W	820	1,170	1,830	2,020
leating		Rated ³	BTU/H	6,300	8,300	9,700	12,100
	Capacity at 17°F	Max	BTU/H	11,000	13,800	16,400	18,800
	Capacity at 5°F	Max ⁴	BTU/H	11,000	13,800	16,400	18,800
	SEER			20.2	20.3	17.7	19.0
	EER			15.0	12.7	12.5	12.5
ficiency	HSPF			10	10	9	9.4
•	COP			3.9	3.4	2.6	2.7
	ENERGY STAR® Certified			Yes	Yes	Yes	Yes
	Air Flow Rate - Cooling	Dry	CFM	230–265–300	230–265–335	245–315–405	300-420-475
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	207–239–270	207–252–302	221–284–365	270–378–429
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	230–265–335	230–265–335	245–315–405	300-420-475
	Sound Pressure Level	Cooling	dB(A)	25–28–31	25–30–34	27–34–39	32-40-43
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	25–28–31	25–30–34	27–34–39	32-40-43
door Unit	External Static Pressure		In. W.G.		_		_
	Condensate Lift Mechanism	Max Distance	In. [mm]	33 [850]	33 [850]	33 [850]	33 [850]
		Н	In. [mm]	9-21/32 [245]	9-21/32 [245]	9-21/32 [245]	9-21/32 [245]
	Dimensions	W	In. [mm]	22-7/16 [570]	22-7/16 [570]	22-7/16 [570]	22-7/16 [570]
		D	In. [mm]	22-7/16 [570]	22-7/16 [570]	22-7/16 [570]	22-7/16 [570]
	Weight	lbs [kg]	[]	31 [13.9]	31 [13.9]	31 [13.9]	31 [13.9]
	MCA	Α		14.0	14.0	17.0	17.0
	MOCP	A		24	24	31	31
	moo.	Н	In. [mm]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]
	Dimensions	W	In. [mm]	38-1/16 [840]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]
	2	D	In. [mm]	13 [330]	13 [330]	13 [330]	13 [330]
utdoor Unit	Weight	lbs [kg]	[iiiiii]	129 [58.5]	129 [58.5]	131 [59.5]	131 [59.5]
	Air Flow Rate (Cooling/Heating)	CFM		1,691/1,691	1,691/1,691	2,020/1,930	2,020/1,930
		Cooling	dB(A)	54	54	55	55
	Sound Pressure Level	Heating	dB(A)	55	55	55	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
iping		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
ra	Max. Length	ft [m]	įrininį	65 [20]	65 [20]	65 [20]	100 [30]
	Max. Height	ft [m]		40 [12]	40 [12]	40 [12]	50 [15]
	Outdoor-Indoor 5			208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
lectrical	Outdoor-Indoor ⁵ V, ph, Hz Recommended Breaker Size A			15	15	200/230, 1, 60	206/230, 1, 60
ofrigorant Type	Newminerided breaker Size	^		R410A	R410A	R410A	20 R410A
Refrigerant Type				14.0 to 115.0	14.0 to 115.0	14.0 to 115.0	14.0 to 115.0
Guaranteed emperature	Cooling ⁶	°F DB [°C DB]		[-10.0 to 46.0] -13.0 to -75.0	14.0 to 115.0 [-10.0 to 46.0] -13.0 to -75.0	14.0 to 115.0 [-10.0 to 46.0] -13.0 to -75.0	[-10.0 to 46.0]
Operation Range	Heating °F DB [°C DB]		-13.0 to -75.0 [-25.0 to 24.0]	-13.0 to -75.0 [-25.0 to 24.0]	-13.0 to -75.0 [-25.0 to 24.0]	-13.0 to -75.0 [-25.0 to 24.0]	

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed) Conditions

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) ⁴Heating at 5°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.


DKS Model

This concealed ceiling-mounted indoor unit model is compact, and fits easily into rooms with lowered ceilings. Highly reliable energy-saving performance makes it a best match choice for concealed unit installations.



Compact Ceiling-concealed Units

Only the intake-air grille and outlet vents are visible when using this ceiling-concealed indoor unit. The rest of the unit is conveniently hidden in the ceiling cavity, essentially leaving the ceiling and walls free of bulky looking devices and maintaining a high-class interior décor. The compact units require minimal space and can be installed in buildings with lowered ceilings, where exposed units were the rule in the past.

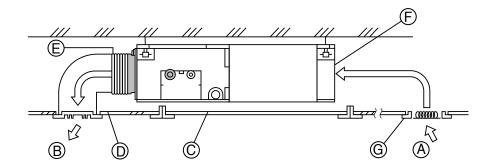

- Air inlet
- Air outlet
- © Access door
- © Ceiling surface
- **©** Canvas duct
- F Air filter
- **©** Inlet grille

Selection of Fan Speeds and Static Pressure Levels

Three fan speed settings (Low, Medium and High) and four static pressure levels are available for all capacities.

Static Pressure Levels

DKS09 - 18	0.02-0.06-0.14-0.20 In.W.G.
------------	-----------------------------

Sound Levels

	Low	Medium	High
09	23 dB(A)	26 dB(A)	30 dB(A)
12	23 dB(A)	28 dB(A)	33 dB(A)
15	30 dB(A)	34 dB(A)	37 dB(A)
18	30 dB(A)	34 dB(A)	38 dB(A)

DKS Model































Remote Controller

NAXDKS(09/12/15/18)A112A*

NAXSKS18A112A*

AAR-40MAAU

*optional PAR-CT01MAU-SB

*optional PAC-YT53CRAU-J

































Indoor Unit				NAXDKS09A112A*	NAXDKS12A112A*	NAXDKS15A112A*	NAXDKS18A112A*
Outdoor Unit				NAXSKS09A112A*	NAXSKS12A112A*	NAXSKS15A112A*	NAXSKS18A112A*
	Capacity	Rated ¹	BTU/H	9,000	12,000	15,000	18,000
	Capacity Range	Min-Max	BTU/H	3,900–9,000	4,000–12,000	5,200–15,000	6,100–18,000
cooling	Power Input	Rated ¹	W	700	930	1,150	1,310
	Moisture Removal	Pints/h		1.5	1.9	1.9	2.8
	Sensible Heat Factor			0.820	0.820	0.860	0.820
	Capacity at 47°F Rated ² BTU/H		BTU/H	12,000	15,000	18,000	21,600
	Capacity Range	Min-Max	BTU/H	4,200	4,800	5,000	8,100
	Power Input at 47°F	Rated ²	W	1,100	1,330	1,440	1,580
leating	0 1 14705	Rated ³	BTU/H	7,600	10,000	11,700	13,900
	Capacity at 17°F	Max	BTU/H	6,700	9,000	11,900	13,100
	Capacity at 5°F	Max ⁴	BTU/H	6,000	7,900	10,000	12,000
	SEER			18.8	20.5	19.0	22.0
	EER			12.8	12.9	13.0	13.7
fficiency	HSPF			11.00	12.40	11.40	13.10
•	COP			3.1	3.3	3.6	4.0
	ENERGY STAR® Certified			Yes	Yes	Yes	Yes
	Air Flow Rate - Cooling	Dry	CFM	194–247–317	247–317–388	353-441-529	423–529–635
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	174–222–285	222–285–349	317–396–476	381–476–572
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	194–247–317	247–317–388	353–441–529	423–529–635
	Sound Pressure Level	Cooling	dB(A)	23–26–30	23-28-33	30–34–37	30-34-38
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	23-26-30	23-28-33	30–34–37	30-34-38
idoor Unit	External Static Pressure In. W.G.		In. W.G.	0.02-0.06-0.14-0.2	0.02-0.06-0.14-0.2	0.02-0.06-0.14-0.2	0.02-0.06-0.14-0.2
	Condensate Lift Mechanism	ondensate Lift Mechanism Max Distance In. [mm]		2121/32 [550]	21-21/32 [550]	21-21/32 [550]	21-21/32 [550]
	Dimensions	Н	In. [mm]	7-7/8 [200]	7-7/8 [200]	7-7/8 [200]	7-7/8 [200]
		w	In. [mm]	31-7/8 [790]	39 [990]	39 [990]	46-7/8 [1190]
		D	In. [mm]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]
	Weight	lbs [kg]		42 [19.0]	50 [22.0]	54 [24.0]	62 [28.0]
	MCA	Α		9.0	9.0	10.0	14.0
	MOCP	A		15	16	18	24
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]
	Dimensions	W	In. [mm]	31-1/2 [800]	31-1/2 [800]	31-1/2 [800]	33-1/16 [840]
Outdoor Unit		D	In. [mm]	11-1/4 [285]	11-1/4 [285]	11-1/4 [285]	13 [330]
diador Offic	Weight	lbs [kg]		81 [37]	81 [37]	81 [37]	127 [58]
	Air Flow Rate (Cooling/Heating)	CFM		1228/1172	1228/1172	1243/1229	1691/1691
	Sound Pressure Level	Cooling	dB(A)	48	49	49	54
	Outlid F1699016 F646(Heating	dB(A)	50	51	51	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
iping		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
	Max. Length	ft [m]		65 [20]	65 [20]	65 [20]	100 [30]
	Max. Height	ft [m]		40 [12]	40 [12]	40 [12]	50 [15]
ectrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
ICCUICAI	Recommended Breaker Size	Α		15	15	15	15
Refrigerant Type				R410A	R410A	R410A	R410A
Guaranteed	Cooling ⁶	°F DB [°C DB]		14.0 to 115.0 [-10.0 to 46.0]			
Operation Range	Heating	°F DB [°C DB]		-4.0 to -75.0 [-20.0 to 24.0]			

Notes:

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor)
²Heating at 47°F (Indoor // Outdoor)
³Heating at 17°F (Indoor // Outdoor)
⁴Heating at 5°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

Conditions

**Indoor units receive power from outdoor units through field-supplied interconnected wiring.

**Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

DKS Model



















NAXSKH(09/12/15/18)A112A*





AAR-40MAAU





Remote Controller

*optional PAC-YT53CRAU-J































Pro-Heat

ndoor Unit				NAXDKS09A112A*	NAXDKS12A112A*	NAXDKS15A112A*	NAXDKS18A112A
Outdoor Unit				NAXSKH09A112A*	NAXSKH12A112A*	NAXSKH15A112A*	NAXSKH18A112A
	Capacity	Rated ¹	BTU/H	9,000	12,000	15,000	18,000
	Capacity Range	Min-Max	BTU/H	4,500–9,000	5,210–12,000	9,000–15,000	9,200-18,000
ooling	Power Input	Rated ¹	W	690	920	1,200	1,370
	Moisture Removal	Pints/h		1.7	2.5	2.8	2.0
	Sensible Heat Factor			0.790	0.760	0.800	0.870
	Capacity at 47°F	Capacity at 47°F Rated ²		12,500	15,000	18,000	21,600
	Capacity Range	Min-Max	BTU/H	8,100–13,300	7,700–18,000	8,600–22,400	8,800-28,000
	Power Input at 47°F	Rated ²	W	1,300	1,120	1,920	1,840
leating		Rated ³	BTU/H	8,700	9,000	12,200	14,200
	Capacity at 17°F	Max	BTU/H	12,500	15,000	18,000	21,600
	Capacity at 5°F	Max ⁴	BTU/H	12,500	15,000	18,000	21,600
	SEER			17.3	19.0	17.3	19.1
	EER			13.0	13.0	12.5	13.1
fficiency	HSPF			9.8	10.2	9.5	10.9
•	COP			2.8	3.9	2.7	3.4
	ENERGY STAR® Certified			Yes	Yes	Yes	Yes
	Air Flow Rate - Cooling	Dry	CFM	194–247–317	247–317–388	353-441-529	423–529–635
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	174–222–285	222–285–349	317–396–476	381–476–572
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	194–247–317	247–317–388	353–441–529	423–529–635
	Sound Pressure Level	Cooling	dB(A)	23–26–30	23–28–33	30–34–37	30–34–38
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	23–26–30	23–28–33	30–34–37	30–34–38
ndoor Unit			In. W.G.	0.02-0.06-0.14-0.2	0.02-0.06-0.14-0.2	0.02-0.06-0.14-0.2	0.02-0.06-0.14-0.
	Condensate Lift Mechanism			2121/32 [550]	21-21/32 [550]	21-21/32 [550]	21-21/32 [550]
	Dimensions	Н	In. [mm]	7-7/8 [200]	7-7/8 [200]	7-7/8 [200]	7-7/8 [200]
		w	In. [mm]	31-7/8 [790]	39 [990]	39 [990]	46-7/8 [1190]
		D	In. [mm]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]
	Weight	lbs [kg]		42 [19.0]	50 [22.0]	54 [24.0]	62 [28.0]
	MCA	A		14.0	14.0	17.0	17.0
	MOCP	A		24	24	31	31
		Н	In. [mm]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]
	Dimensions	W	In. [mm]	38-1/16 [840]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]
		D	In. [mm]	13 [330]	13 [330]	13 [330]	13 [330]
Outdoor Unit	Weight	lbs [kg]	[]	129 [58.5]	129 [58.5]	131 [59.5]	131 [59.5]
	Air Flow Rate (Cooling/Heating)	CFM		1,691/1,691	1,691/1,691	2,020/1,930	2,020/1,930
		Cooling	dB(A)	54	54	55	55
	Sound Pressure Level	Heating	dB(A)	55	55	55	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
Piping		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
. 3	Max. Length	ft [m]	. []	65 [20]	65 [20]	65 [20]	100 [30]
	Max. Height	π [m]		40 [12]	40 [12]	40 [12]	50 [15]
	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
lectrical	Recommended Breaker Size	-		15	15	20	20
tefrigerant Type	John Market Broaker Bize	1.,		R410A	R410A	R410A	R410A
Guaranteed	Cooling ⁶	°F DB [°C DB]		14.0 to 115.0	14.0 to 115.0	14.0 to 115.0	14.0 to 115.0
Temperature		[]		[-10.0 to 46.0]	[-10.0 to 46.0]	[-10.0 to 46.0]	[-10.0 to 46.0]
Operation Range	Heating °F DB [°C DB]			-13.0 to -75.0 [-25.0 to 24.0]			

Notes:

Notes:

AHRI Rated Conditions

1 Cooling (Indoor // Outdoor)

4 Heating at 47°F (Indoor // Outdoor)

6 F 70 DB, 60 WB // 47 DB, 43 WB

at a fixed compressor speed)

3 Heating at 17°F (Indoor // Outdoor)

4 Heating at 17°F (Indoor // Outdoor)

7 TO DB, 60 WB // 47 DB, 43 WB

4 TO DB, 60 WB // 17 DB, 15 WB

Conditions

4 Heating at 5°F (Indoor // Outdoor)

7 TO DB, 60 WB // 5 DB, 4 WB

4 Heating at 5°F (Indoor // Outdoor)

6 TO DB, 60 WB // 5 DB, 4 WB

6 TO DB, 60 WB // 5 DB, 4 WB

6 TO DB, 60 WB // 5 DB, 4 WB

6 TO DB, 60 WB // 5 DB, 4 WB

6 TO DB, 60 WB // 5 DB, 4 WB

6 TO DB, 60 WB // 5 DB, 60 WB /

PEAD Model

The thin, ceiling-concealed indoor units of this model are the perfect answer for the air conditioning needs of buildings with minimum ceiling installation space and wide-ranging external static pressure. Energy-saving efficiency has been improved, reducing electricity consumption and contributing to a further reduction in operating cost.



Compact Indoor Units

The height is only 9-7/8" for all sizes of this model from 12 to 42 kBTU/H. This makes it possible for the unit to be installed in low ceilings with minimal clearance space.



External Static Pressure


External static pressure conversion can be set up to five settings. Capable of being set to a maximum of 0.60 ln.W.G., units are applicable to a wide range of building types.


■ External static pressure

Model	12	18	24	30	36	42
PEAD-A AA		0.14-0.2	20-0.28-0	.40-0.60	ln. W.G.	

High Energy Efficiency

SEER/HSPF has been greatly improved, and 12,000/18,000 BTU/H models have been added to the line-up.

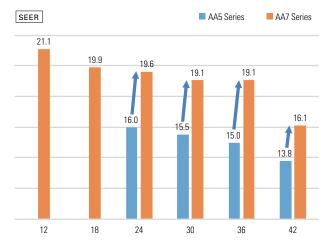

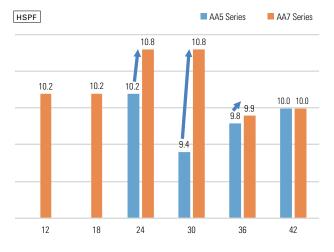

Built-in Drain Lift Mechanism

All models feature a built-in drain lift mechanism for removal of condensate. The unit's fail-safe mechanism recognizes when there is a high liquid level in the condensate pan and turns off the indoor fan and the outdoor unit compressor to prevent overflow.

PEAD Model























NAXSKS(18/24/30/36)A112A*







Outdoor Unit











Remote Controller

*optional PAR-CT01MAU-SB

*optional AAR-40MAAU

PAC-YT53CRAU-J





























Failure	1
Poco	
Recal	

Indoor Unit				PEAD-A09AA7	PEAD-A12AA7	PEAD-A15AA7	PEAD-A18AA7	PEAD-A24AA7	PEAD-A30AA7	PEAD-A36AA7
Outdoor Unit				NAXSK- S09A112A*	NAXSK- S12A112A*	NAXSK- S15A112A*	NAXSK- S18A112A*	NAXSK- S24A112A*	NAXSK- S30A112A*	NAXSK- S36A112A*
	Capacity	Rated ¹	BTU/H	9,000	12,000	15,000	18,000	24,000	27,000	33,000
	Capacity Range	Min-Max	BTU/H	4,300-9,000	4,400–12,000	5,500-15,000	6,200–18,000	12,000–24,000	13,200–27,000	14,000–33,000
Cooling	Power Input	Rated ¹	W	720	930	1,150	1,270	1,920	2,160	3,510
Ü	Moisture Removal	Pints/h		0.8	1.1	1.3	3.2	4.9	3.9	4.8
	Sensible Heat Factor			0.900	0.900	0.900	0.800	0.770	0.840	0.840
	Capacity at 47°F	Rated ²	BTU/H	12.000	15.000	18.000	21,600	25,000	30.000	33.400
	Capacity Range	Min-Max	BTU/H	3,960–13,000	4,800–17,000	4,900–21,500	8,120–25,600	14,400–28,000	15,860–33,000	14,750–36,000
	Power Input at 47°F	Rated ²	W	900	1,160	1,350	1,600	1,990	2,410	3,170
Heating		Rated ³	BTU/H	7,600	9,900	11,300	14,000	15,000	22,400	23,000
	Capacity at 17°F	Max	BTU/H	7,600	9,900	11,300	14,000	15,000	22,400	23,100
	Capacity at 5°F	Max ⁴	BTU/H	6,100	7,900	10,100	12,000		_	_
	SEER			19.7	20.5	19.2	19.8	18.0	18.0	16.0
	EER			12.5	12.9	13.0	14.1	12.5	12.5	9.4
Efficiency	HSPF			12.6	13	11.6	12.9	11.2	12.6	11.6
,	COP			3.9	3.7	3.9	3.9	3.6	3.6	3.0
	ENERGY STAR® Certified			Yes						
	Air Flow Rate - Cooling	Dry	CFM	282–318–353	353-424-494	424–512–600	424–512–600	512–636–742	618–742–883	847–1024–1201
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	254–286–318	318–382–445	382–461–540	382–461–540	461–572–667	556–668–795	762–922–1081
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	282–318–353	353-424-494	424–512–600	424–512–600	512-636-742	618–742–883	847–1024–1201
	Sound Pressure Level	Cooling	dB(A)	24-26-28	28-30-34	30–33–37	30–33–37	30-33-37	30–34–39	33–38–42
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	24-26-28	28-30-34	30–33–37	30–33–37	30-33-37	30-34-39	33–38–42
Indoor Unit	External Static Pressure In. W.G.		0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	
	Condensate Lift Mechanism	Max Distance	In. [mm]	279/16 [700]	27-9/16 [700]	279/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]
		Н	In. [mm]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]
	Dimensions	W	In. [mm]	35-7/16 [900]	35-7/16 [900]	35-7/16 [900]	35-7/16 [900]	43-5/16 [1100]	43-5/16 [1100]	55-1/8 [1400]
		D	In. [mm]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]
	Weight	lbs [kg]		58 [26]	58 [26]	62 [28]	62 [28]	69 [31]	69 [31]	86 [39]
	MCA	A		9.0	9.0	10.0	14.0	17.0	17.0	17.0
	MOCP	Α		15	16	18	24	31	31	31
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]
	Dimensions	W	In. [mm]	31-1/2 [800]	31-1/2 [800]	31-1/2 [800]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]
Outdoor Unit		D	In. [mm]	11-1/4 [285]	11-1/4 [285]	11-1/4 [285]	13 [330]	13 [330]	13 [330]	13 [330]
Catacor Crit	Weight	lbs [kg]		81 [37]	81 [37]	81 [37]	127 [58]	129 [58.5]	129 [58.5]	129 [58.5]
	Air Flow Rate (Cooling/Heating)	CFM		1228/1172	1228/1172	1243/1229	1691/1691	2020/1930	2020/1930	2020/1930
	Cound Droopure Lovel	Cooling	dB(A)	48	49	49	54	55	55	55
	Sound Pressure Level	Heating	dB(A)	50	51	51	55	55	55	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
	Max. Length	ft [m]		65 [20]	65 [20]	65 [20]	100 [30]	100 [30]	100 [30]	100 [30]
	Max. Height	ft [m]		40 [12]	40 [12]	40 [12]	50 [15]	100 [30]	100 [30]	100 [30]
Floatrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical	Recommended Breaker Size			15	15	15	15	20	20	20
Refrigerant Type				R410A						
Guaranteed	Cooling ⁶	°F DB [°C DB]		14.0 to 115.0 [-10.0 to 46.0]						
Temperature Operation Range	Heating	°F DB [°C DB]		-4.0 to -75.0 [-20.0 to 24.0]	14.0 to -75.0 [-10.0 to 24.0]	14.0 to -75.0 [-10.0 to 24.0]	14.0 to -75.0 [-10.0 to 24.0]			

Notes:

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) 80 DB, 67 WB // 95 DB, 75 WB

70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

Conditions 4Heating at 5°F (Indoor // Outdoor)
findoor units receive power from outdoor units through field-supplied interconnected wiring. ⁶Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

PEAD Model



















PEAD-A09/12/15/18AA7



NAXSKH(09/12/15/18)A112A*



*optional

*optional AAR-40MAAU



*optional PAR-CT01MAU-SB



Remote Controller

*optional PAC-YT53CRAU-J



































Indoor Unit				PEAD-A09AA7	PEAD-A12AA7	PEAD-A15AA7	PEAD-A18AA7
Outdoor Unit				NAXSKH09A112A*	NAXSKH12A112A*	NAXSKH15A112A*	NAXSKH18A112A*
	Capacity	Rated ¹	BTU/H	9,000	12,000	15,000	18,000
	Capacity Range	Min-Max	BTU/H	5,000–9,000	5,770–12,000	9,600–15,000	9,320-18,000
ooling	Power Input	Rated 1	W	650	850	1,190	1,400
	Moisture Removal	Pints/h		1.4	1.9	2.4	3.6
	Sensible Heat Factor			0.820	0.820	0.820	0.780
	Capacity at 47°F	Rated ²	BTU/H	12,000	15,000	18,000	21,600
	Capacity Range	Min-Max	BTU/H	8,200-14,000	7,900–18,000	8,800-23,000	8,800-28,000
	Power Input at 47°F	Rated ²	W	910	1,100	1,710	1,890
Heating		Rated ³	BTU/H	6,800	9,000	11,700	14,200
	Capacity at 17°F	Max	BTU/H	12,000	15,000	18,000	21,600
	Capacity at 5°F	Max ⁴	BTU/H	12,000	15,000	18,000	21,600
	SEER			17.8	19.3	18.3	18.9
	EER			13.8	14.1	12.6	12.8
fficiency	HSPF			10.8	11	9.9	10.8
,	COP			3.8	3.9	3.0	3.3
	ENERGY STAR® Certified			Yes	Yes	Yes	Yes
	Air Flow Rate - Cooling	Dry	CFM	282–318–353	353-424-494	424–512–600	424–512–600
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	254–286–318	318–382–445	382–461–540	382–461–540
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	282–318–353	353-424-494	424–512–600	424–512–600
	Sound Pressure Level	Cooling	dB(A)	24–26–28	28-30-34	30–33–37	30–33–37
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	24–26–28	28-30-34	30–33–37	30–33–37
ndoor Unit			In. W.G.	0.14-0.2-0.28-0.4-0.6	0.14-0.2-0.28-0.4-0.6	0.14-0.2-0.28-0.4-0.6	0.14-0.2-0.28-0.4-0
			-	279/16 [700]	27-9/16 [700]	279/16 [700]	27-9/16 [700]
	Condendate Ent Wednamon	H	In. [mm]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]
	Dimensions	W	In. [mm]	35-7/16 [900]	35-7/16 [900]	35-7/16 [900]	35-7/16 [900]
	Diricholono	D	In. [mm]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]
	Weight	lbs [kg]	mi. [minij	58 [26]	58 [26]	62 [28]	62 [28]
	MCA			14.0	14.0	17.0	17.0
	MOCP	A		24	24	31	31
	WOCF	Н	In [mm]			· ·	
	Dimensions	W	In. [mm]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880] 33-1/16 [840]
	Dimensions	D	In. [mm]	38-1/16 [840]	33-1/16 [840]	33-1/16 [840]	
Outdoor Unit	Majaht		In. [mm]	13 [330]	13 [330]	13 [330]	13 [330]
	Weight Air Flow Rate	lbs [kg]		129 [58.5]	129 [58.5]	131 [59.5]	131 [59.5]
	(Cooling/Heating)	CFM		1,691/1,691	1,691/1,691	2,020/1,930	2,020/1,930
	Sound Pressure Level	Cooling	dB(A)	54	54	55	55
		Heating	dB(A)	55	55	55	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
iping		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
	Max. Length	ft [m]		65 [20]	65 [20]	65 [20]	100 [30]
	Max. Height	ft [m]		40 [12]	40 [12]	40 [12]	50 [15]
lectrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
icciiicai	Recommended Breaker Size	Α		15	15	20	20
Refrigerant Type				R410A	R410A	R410A	R410A
Guaranteed	Cooling ⁶	°F DB [°C DB]		14.0 to 115.0 [-10.0 to 46.0]			
Temperature Operation Range	Heating	°F DB [°C DB]		-13.0 to -75.0 [-25.0 to 24.0]			

Notes:

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed) Conditions

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) ⁴Heating at 5°F (Indoor // Outdoor)

Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.



Series







SELECTION

Line-up includes a selection of six indoor units and three categories of outdoor units. Easily construct a system that best matches room air conditioning needs.






P-Series

The P-Series is designed to achieve industry-leading seasonal energy-efficiency through use of new technologies and high-performance compressors. Installation is easy thanks to outdoor units with a side-flow configuration, a maximum piping length of 225 ft. PUY only and pipe-replacement technologies.



Industry Leading Energy Efficiency

Industry-leading energy efficiency has been achieved through optimization of a newly designed compressor and the use of the latest energy-saving technologies. All compressors offer high performance due to advanced variable-speed INVERTER-drive technology, which varies the compressor speed dynamically to continuously adapt to the conditioning requirements of the room.

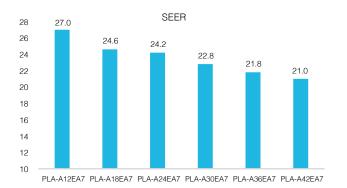



Advanced Energy-saving Technology

Highly efficient fan for outdoor unit


Fan opening of 21-3/4" (A36-42)

The opening for the fan in the outdoor unit is 21-3/4" in diameter. By exchanging heat more efficiently, this will contribute to energy-saving and low noise level.



Improved fan (A36-42)


A newly designed fan has been adopted, increasing airflow capacity and reducing operation noise.



Highly efficient heat exchanger

High-density heat exchanger (A36-42)

The A36-42 units use 5/16"-diameter pipe. The high-density heat exchanger contributes to efficient heat exchange and reduces the amount of refrigerant used, which is better for the environment.



2 lines, 64 columns

(A36-42)

Cooling Only PUY Model


Low ambient cooling operation range




High Reliability and Performance in Low Ambient Conditions

By changing the fan speed control in low ambient temperatures, the PUY model can offer stable operation down to -40° F. This model range is well suited for cooling needs in cold regions.

Low ambient cooling operation range

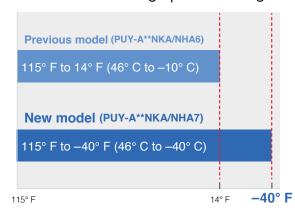


High capacity at low ambient condition

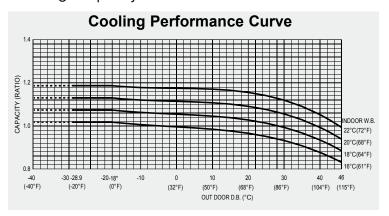


Quick auto restart after power failure

In case of power failures, the time until auto restart became shorter from 180 seconds to 60 seconds. The unit will quickly restart with the same operation mode as before the power failure.

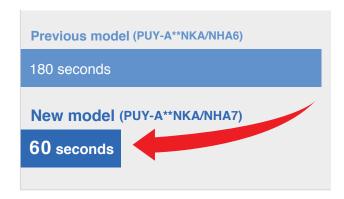

Backup rotation function

The two units can operate alternately so the units can maintain their quality for a longer period of time, and so that even if there is trouble with one unit, the other unit will keep operating.
*Can only be used with AAR-40MAAU controller

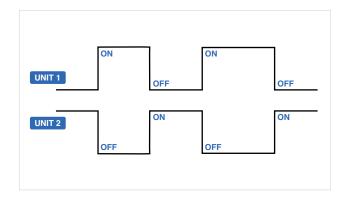

Continuous operation

Control algorithm allows for stable continuous operation to meet cooling requirements all year round. The unit will quickly restart with the same operation mode as before the power failure.

^{*}Optional Air Protection Guide/Wind Baffle is needed when ambient temperature is under 23° F.


HEAT PUMP

PUZ Model



Quiet and Comfort

Sound level

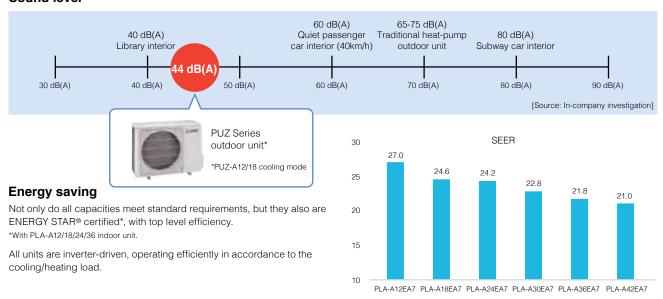

Wide Operation Range

Due to the wide operation range, the units can be used in many different climates.



*1 In case that the air protection guide wind baffle is installed. (In case the wind baffle is not installed, the minimum temperature will be 23° F (-5° C) DB)
*2 A24/30/36/42

Flexible Installation

Long piping length

The long piping length allows them to be installed in unnoticeable places such as rooftops.

	Piping					
	Length (ft)	Height (ft)				
PUZ-A12NKA7	100	100				
PUZ-A18NKA7	100	100				
PUZ-A24NHA7	165	100				
PUZ-A30NHA7	165	100				
PUZ-A36NKA7	165	100				
PUZ-A42NKA7	165	100				

Various types of indoor units

With various types of indoor units, there is a perfect match for any type of application, starting from residential homes to restaurants and offices.




Pro-Heat

PUZ-HA Model




Improved Heating Performance

Our unique Flash Injection circuit achieves remarkably high heating performance. This technology has resulted in an excellent heating capacity rating in outdoor temperatures as low as 5° F, and the guaranteed heating operation range of the heating mode has been extended to -13° F. Accordingly, the hyper-heating PUZ-HA Model are perfect for warming homes in the coldest of regions.

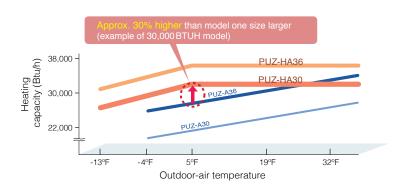


Guaranteed heating operation range is extended to -13° F ambient temperature

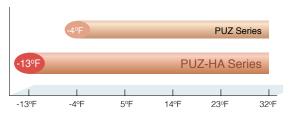


Enhanced Comfort


The Flash Injection circuit improves start-up and recover from the defrosting operation. A newly introduced defrost operation control also improves defrost frequency. These features enable the temperature to reach the set temperature more quickly, and contribute to maintaining it at the desired setting.

Quick Start-up

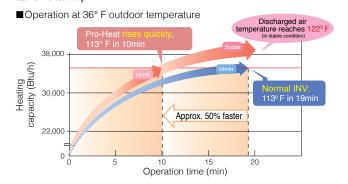

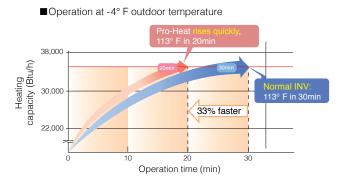

Pro-Heat Defrost Control and Faster Recovery from Defrost Operation Field Test Results: Office building in Asahikawa, Hokkaido, Japan

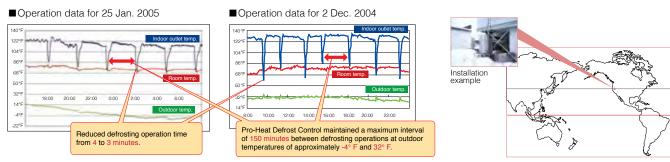

PLA Model

A complete line-up that offer superior energy savings. The incorporation of wide air-outlet and the 3D i-see Sensor® enhances airflow distribution control, achieving an enhanced level of comfort throughout the room. The synergy of higher energy efficiency and more comfortable room environment results in the utmost user satisfaction.



4-way Ceiling Cassette Line-up

For users seeking further energy savings, we offer a wide line-up from 12-42 KBTU/H.

■Line-up Model 12 18 24 30 36 42 Series 4-way Cassette (PLA-A) PLA-A12EA7 PLA-A18EA7 PLA-A24EA7 PLA-A30EA7 PLA-A36EA7 PLA-A42EA7

■Key Technologies for Higher Energy Efficiency

3D Turbo Fan


By optimizing the fan blade wing design using a three-dimensional shape, efficiency has been improved and operating noise reduced.

■Indoor/Outdoor Unit Combinations



Energy-saving Performance

SEER/HSPF has been greatly improved, realizing industry-leading energy-saving features.

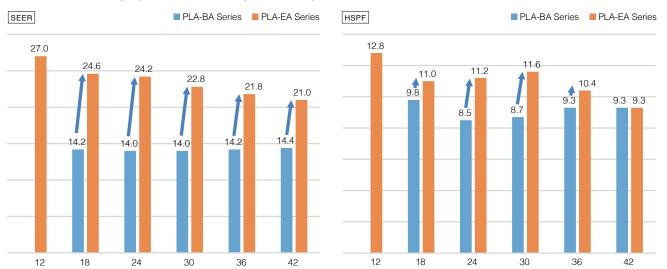

Horizontal Airflow

For users seeking further energy savings, we offer a wide line-up from 12-42 KBTU/H.

Draft reduction vane setting

The newly function Draft Reduction of manual vane setting makes the air flow direction more horizontal than usual horizontal vane setting. It reduces a drafty feeling dramatically.

*The draft reduction can be set for only 1 vane. AAR-40MAAU is required for this setting.


Individual vane settings

72 patterns of airflow to accommodate any room layout are available. The number of outlet can be set to 4, 3, or 2. Flexible airflow is available by fixing the up-down airflow direction of the outlet with a wired remote controller (or manually).

72 airflow patterns



4-, 3-, or 2- way outlet selection*



*Optional parts air outlet shutter plate is required for 2- or 3- way outlet selection.





Easy Installation

Electrical box wiring

After reviewing the power supply terminal position in the electrical box, the structure was redesigned to improve connectivity. This has made previously complex wiring work easier.

■ Previous Model (BA Model)



■ New Model (EA Model)



Increased space for piping work

The top and bottom positions of the liquid and gas pipes have been reversed to allow the gas pipe work, which requires more effort, to be completed first. Further, through structural innovations related to the space around the pipes, the area where the spanner can be moved has been increased, thus improving liquid pipe work and enabling it to be completed smoothly.





Temporary hanging hook

The structure of the panel has been revised and is now equipped with a temporary hanging hook. This has improved work efficiency during panel installation.





No need to remove screws

Installation is possible without removing the screws for the corner panel and the control box, simply loosen them. This lowers the risk of losing screws.

■ Corner panel



■ Corner box cover



Lightweight decorative panel

After reviewing the structure and materials, weight has been reduced approximately 20% compared to the previous model, reducing the burden of installation.




3D i-see Sensor for P-Series

Detects number of people

The 3D i-see Sensor® detects the number of people in the room and adjusts the power accordingly. This makes automatic power-saving operation possible in places where the number of people changes frequently. Additionally, when the area is continuously unoccupied, the system switches to a more enhanced power-saving mode. Depending on the setting, it can also stop the operation.

Detects people's position

Once a person is detected, the angle of the vane is automatically adjusted. Each vane can be independently set to Direct Airflow or Indirect Airflow according to taste.

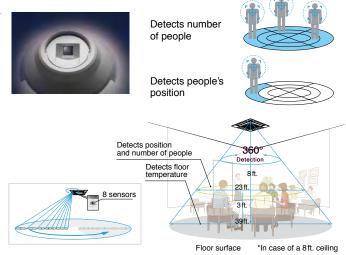

Detects number of people

Room occupancy energy-saving mode


The 3D i-see Sensor detects the number of people in the room. It then calculates the occupancy rate based on the maximum number of people in the room up to that point in time in order to save air conditioning power. When the occupancy rate is approximately 30%, air-conditioning power equivalent to 2° F during both cooling and heating operation is saved. The temperature is controlled according to the number of people.

No occupancy energy-saving mode

When 3D i-see Sensor detects that no one is the room, the system is switched to a pre-set power-saving mode. If the room remains unoccupied for more than 60min, air-conditioning power equivalent to 4°

No occupancy Auto-OFF mode

F during both cooling and heating operation is saved. This contributes to preventing waste in terms of heating and cooling.

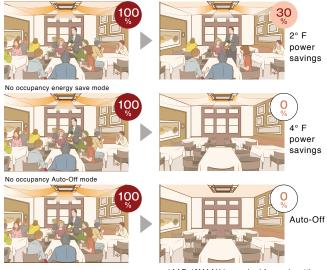

*AAR-40MAAU is required for each setting

When the room remains unoccupied for a pre-set period of time, the air conditioner turns off automatically, thereby providing even greater power savings. The time until operation is stopped can be set in intervals of 10 min, ranging from 60 to 180 min.

Detects people's position

Direct/Indirect settings*

The horizontal airflow spreads across the ceiling. When set to Indirect Airflow uncomfortable drafty-feeling is eliminated completely.



*AAR-40MAAU is required for each setting

Seasonal airflow*

When Cooling

Saves energy while keeping a comfortable effective temperature by automatically switching between ventilation and cooling. When a pre-set temperature is reached, the air conditioning unit switches to swing fan operation to maintain the effective temperature. This



*AAR-40MAAU is required for each setting

clever function contributes to keeping a comfortable coolness.

When Heating

The air conditioning unit automatically switches between circulator and heating. Wasted heat that accumulates near the ceiling is reused via circulation. When a pre-set temperature is reached the air conditioner switches from heating to circulator and blows air in the horizontal direction. It pushes down the warm air that has gathered near the ceiling to people's height, thereby providing smart heating.

PLA-A Model



















MODEL SELECTION

Indoor Unit



PLA-A12/18/24/30/36/42EA7

Outdoor Unit

Cooling Only



PUY-A12/18NKA7





PUY-A24/30NHA7



PUY-A36/42NKA7



Heat Pump



PUZ-A12/18NKA7



PUZ-A24/30NHA7



PUZ-A36/42NKA7



Required grille: PLP-40EAEU / PLP-41EAEU



Hyper-heating



PUZ-HA24NHA



PUZ-HA30/36NHA5



PUZ-HA42NKA

Remote Controller



*optional AAR-40MAAU



*optional PAC-YT53CRAU-J



*optional



*optional PAR-CT01MAU-SB

PLA Model COOLING ONLY

























Indoor Unit				PLA-A12EA7	PLA-A18EA7	PLA-A24EA7	PLA-A30EA7	PLA-A36EA7	PLA-A42EA7
Outdoor Unit	utdoor Unit			PUY-A12NKA7(-BS)	PUY-A18NKA7(-BS)	PUY-A24NHA7(-BS)	PUY-A30NHA7(-BS)	PUY-A36NKA7(-BS)	PUY-A42NKA7(-BS)
	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	30,000	36,000	42,000
	Capacity Range	Min-Max	BTU/H	5,800–12,000	8,000-18,000	10,000–24,000	9,000–30,000	16,000–36,000	16,000-42,000
Cooling	Power Input	Rated ¹	w	730	1,250	1,670	2,540	2,780	3,590
	Moisture Removal	Pints/h		1.2	2.4	3.0	5.4	4.5	7.9
	Sensible Heat Factor			0.890	0.850	0.860	0.800	0.860	0.790
	Capacity at 47°F	Rated	BTU/H	_	_	_	_	_	_
	Capacity Range	Min-Max	BTU/H	_	_	_	_	_	_
	Power Input at 47°F	Rated	w	_	_	_	_	_	_
Heating	0 1 14705	Rated	BTU/H	_	_	_	_	_	_
	Capacity at 17°F	Max	BTU/H	_	_	_	_	_	_
	Capacity at 5°F	Max	BTU/H	_	_	_	_	_	_
	SEER			27.0	24.6	24.2	22.8	21.8	21.0
	EER			16.4	14.4	14.3	11.8	12.9	11.6
Efficiency	HSPF			_	_	_	_	_	_
	COP			_	_	_	_	_	_
	ENERGY STAR® Certified			Yes	Yes	Yes	No	Yes	No
	Air Flow Rate - Cooling	Dry	CFM	420-460-490-530	420-460-570-600	530-640-710-810	570-670-780-880	670-850-1020-1200	740-920-1060-1200
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	380-420-450-490	380-420-530-560	490-600-670-770	530-630-740-840	630-810-980-1160	700-880-1020-1160
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	420-460-490-530	420-460-570-600	530-640-710-810	570-670-780-880	670-850-1020-1200	740-920-1060-1200
	Sound Pressure Level	Cooling	dB(A)	27–28–29–30	28-29-31-32	28-30-33-36	28-32-35-38	32–37–41–44	34–38–42–45
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	27–28–29–30	28-29-31-32	28-30-33-36	28-32-35-38	32–37–41–44	34–38–42–45
Indoor Unit	External Static Pressure In. W.G.		_	_	_	_	_	_	
macor orm	Condensate Lift Mechanism	Max Distance	In. [mm]	[849]	[849]	[849]	[849]	[849]	[849]
		Н	In. [mm]	10-5/32 // 1-9/16 [258 // 40]	10-5/32 // 1-9/16 [258 // 40]	10-5/32 // 1-9/16 [258 // 40]	11-3/4 // 1-9/16 [298 // 40]	11-3/4 // 1-9/16 [298 // 40]	11-3/4 // 1-9/16 [298 // 40]
	Dimensions	w	In. [mm]	33-1/16 // 37-13/32 [840]					
		D	In. [mm]	33-1/16 // 37-13/32 [840]					
	Weight	lbs [kg]		46 // 11 [21 // 5]	46 // 11 [21 // 5]	56 // 11 [25 // 5]	56 // 11 [25 // 5]	56 // 11 [25 // 5]	56 // 11 [25 // 5]
	MCA	Α		11.0	11.0	19.0	19.0	25.0	25.0
	MOCP	Α		28	28	26	26	31	31
		Н	In. [mm]	24-13/16 [630]	24-13/16 [630]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	In. [mm]	31-13/16 (+7/16) [809 (+62)]	31-13/16 (+7/16) [809 (+62)]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	11-3/16 [300]	11-3/16 [300]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		92 [41]	99 [44]	151 [68]	151 [68]	211 [96]	211 [96]
	Air Flow Rate (Cooling/Heating)	CFM		1590/—	1590/—	1940/—	1940/—	3880/—	3880/—
	Sound Pressure Level	Cooling	dB(A)	44	44	47	47	52	52
	Council Tossaic Ecver	Heating	dB(A)	_	_	_	_	_	_
		Gas (O.D.)	In. [mm]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	-	_	-	_	-	-
	Max. Length	ft [m]		165 [50]	165 [50]	225 [68]	225 [68]	225 [68]	225 [68]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
Electrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
	Recommended Breaker Size	Α		15	15	25	25	30	30
Refrigerant Type	I	1		R410A	R410A	R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling 6	°F DB [°C DB]		-40.0 to 115.0 [-40.0 to 46.0]					
Operation Range	Heating	°F DB [°C DB]		_	_	_	_	_	_

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed) ¹Cooling (Indoor // Outdoor)

°F 80 DB, 67 WB // 95 DB, 75 WB

⁵Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Wind baffles required to operate below 23°F DB in cooling mode. PUY with wind baffle: -40°F - 115°F. Refer to wind baffle documentation for further information. SEACOAST PROTECTION

- SEACOAST PROTECTION

 External Outer Panel: Phosphate coating + Acrylic-Enamel coating

 Fan Motor Support: Epoxy resin coating (at edge face)

 Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)

 "Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.



























Indoor Unit				PLA-A12EA7	PLA-A18EA7	PLA-A24EA7	PLA-A30EA7	PLA-A36EA7	PLA-A42EA7
Outdoor Unit		PUZ-A12NKA7(-BS)	PUZ-A18NKA7(-BS)	PUZ-A24NHA7(-BS)	PUZ-A30NHA7(-BS)	PUZ-A36NKA7(-BS)	PUZ-A42NKA7(-BS)		
	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	30,000	36,000	42,000
	Capacity Range	Min-Max	BTU/H	5,800–12,000	8,000–18,000	10,000–24,000	9,000–30,000	16,000–36,000	16,000–42,000
Cooling	Power Input	Rated ¹	w	730	1,250	1,670	2,540	2,780	3,590
	Moisture Removal	Pints/h		1.2	2.4	3.0	5.4	4.5	7.9
	Sensible Heat Factor			0.890	0.850	0.860	0.800	0.860	0.790
	Capacity at 47°F	Rated ²	BTU/H	14,000	19,000	26,000	32,000	38,000	45,000
	Capacity Range	Min-Max	BTU/H	5,500-20,000	7,900–23,000	9,000–29,000	9,000–33,000	18,000–42,000	18,000–48,000
	Power Input at 47°F	Rated ²	w	830	1,300	1,750	2,400	2,540	3,290
Heating		Rated ³	BTU/H	10,100	11,000	14,900	18,100	22,000	28,000
	Capacity at 17°F	Max	BTU/H	12,200	13,500	17,400	20,800	25,500	30,800
	Capacity at 5°F	Max ⁴	BTU/H	_	_	_	_	_	_
	SEER			27.0	24.6	24.2	22.8	21.8	21.0
	EER			16.4	14.4	14.3	11.8	12.9	11.6
Efficiency	HSPF			12.8	11	11.2	11.6	10.4	9.3
-	COP			4.94	4.28	4.35	3.9	4.38	4.0
	ENERGY STAR® Certified			Yes	Yes	Yes	No	Yes	No
	Air Flow Rate - Cooling	Dry	CFM	420-460-490-530	420-460-570-600	530-640-710-810	570-670-780-880	670-850-1020-1200	740–920–1060–1200
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	380-420-450-490	380-420-530-560	490-600-670-770	530-630-740-840	630-810-980-1160	700-880-1020-1160
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	420-460-490-530	420-460-570-600	530-640-710-810	570–670–780–880	670-850-1020-1200	740-920-1060-1200
	Sound Pressure Level	Cooling	dB(A)	27-28-29-30	28-29-31-32	28-30-33-36	28-32-35-38	32–37–41–44	34–38–42–45
	(Quiet-Lo-Med-Hi-SHi)	Heating dB(A)		27–28–29–30	28-29-31-32	28-30-33-36	28-32-35-38	32–37–41–44	34–38–42–45
	External Static Pressure		In. W.G.	_	_	_	_	_	_
Indoor Unit	Condensate Lift Mechanism	Max Distance	In. [mm]	[849]	[849]	[849]	[849]	[849]	[849]
		н	In. [mm]	10-5/32 // 1-9/16 [258 // 40]	10-5/32 // 1-9/16 [258 // 40]	10-5/32 // 1-9/16 [258 // 40]	11-3/4 // 1-9/16 [298 // 40]	11-3/4 // 1-9/16 [298 // 40]	11-3/4 // 1-9/16 [298 // 40]
	Dimensions	w	In. [mm]	33-1/16 // 37-13/32 [840]	33-1/16 // 37-13/32 [840]	33-1/16 // 37-13/32 [840]	33-1/16 // 37-13/32 [840]	33-1/16 // 37-13/32 [840]	33-1/16 // 37-13/32 [840]
		D	In. [mm]	33-1/16 // 37-13/32 [840]	33-1/16 // 37-13/32 [840]	33-1/16 // 37-13/32 [840]	33-1/16 // 37-13/32 [840]	33-1/16 // 37-13/32 [840]	33-1/16 // 37-13/32 [840]
	Weight	lbs [kg]		46 // 11 [21 // 5]	46 // 11 [21 // 5]	56 // 11 [25 // 5]	56 // 11 [25 // 5]	56 // 11 [25 // 5]	56 // 11 [25 // 5]
	MCA	Α		11.0	11.0	19.0	19.0	25.0	25.0
	MOCP	Α		28	28	26	26	31	31
		Н	In. [mm]	24-13/16 [630]	24-13/16 [630]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	w	In. [mm]	31-13/16 (+7/16) [809 (+62)]	31-13/16 (+7/16) [809 (+62)]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	11-3/16 [300]	11-3/16 [300]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		93 [42]	100 [45]	153 [69]	153 [69]	214 [97]	214 [97]
	Air Flow Rate (Cooling/Heating)	СҒМ		1590/1590	1590/1590	1940/1940	1940/1940	3880/3880	3880/3880
	Sound Pressure Level	Cooling	dB(A)	44	44	47	47	52	52
	Souria Pressure Lever	Heating	dB(A)	46	46	48	48	53	53
		Gas (O.D.)	In. [mm]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	-	-	-	_	-	_
. •	Max. Length	ft [m]		100 [30]	100 [30]	165 [50]	165 [50]	165 [50]	165 [50]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
Floorisal	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical	Recommended Breaker Size	Α		15	15	25	25	30	30
Refrigerant Type				R410A	R410A	R410A	R410A	R410A	R410A
Guaranteed	Cooling ⁶	°F DB [°C DB]		0.0 to 115.0 [-18.0 to 46.0]	0.0 to 115.0 [-18.0 to 46.0]	0.0 to 115.0 [-18.0 to 46.0]	0.0 to 115.0 [-18.0 to 46.0]	0.0 to 115.0 [-18.0 to 46.0]	0.0 to 115.0 [-18.0 to 46.0]
Temperature Operation Range	Heating	°F DB [°C DB]		12.0 to 70.0 [-11.0 to 21.0]	12.0 to 70.0 [-11.0 to 21.0]	-4.0 to 70.0 [-20.0 to 21.0]	-4.0 to 70.0 [-20.0 to 21.0]	-4.0 to 70.0 [-20.0 to 21.0]	-4.0 to 70.0 [-20.0 to 21.0]

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed) ¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) ⁴Heating at 5°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB

°F °F 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

Conditions

Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Wind baffles required to operate below 23°F DB in cooling mode. PUZ with wind baffle: 0° F - 115° F. Refer to wind baffle documentation for further information. SEACOAST PROTECTION

- External Outer Panel: Phosphate coating + Acrylic-Enamel coating
- Fan Motor Support: Epoxy resin coating (at edge face)
 Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)
- "Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

PLA Model HYPER-HEATING

























ä		١
	Failure	ı
	Popull	ı

Indoor Unit				PLA-A24EA7	PLA-A30EA7	PLA-A36EA7	PLA-A42EA7
Outdoor Unit				PUZ-HA24NHA	PUZ-HA30NHA5	PUZ-HA36NHA5	PUZ-HA42NKA
	Capacity	Rated ¹	BTU/H	24,000	30,000	36,000	42,000
	Capacity Range	Min-Max	BTU/H	10,000–24,000	18,000	18,000	19,000
Cooling	Power Input	Rated ¹	w	1,710	2,400	2,850	4,160
	Moisture Removal	Pints/h		3.0	7.2	7.1	10.9
	Sensible Heat Factor			0.860	0.730	0.710	0.710
	Capacity at 47°F	Rated ²	BTU/H	26,000	32,000	38,000	48,000
	Capacity Range	Min-Max	BTU/H	10,000-28,000	18,000–34,000	18,000–40,000	21,000–54,000
	Power Input at 47°F	Rated ²	W	1,700	3,330	3,130	4,560
Heating	0	Rated ³	BTU/H	17,300	19,000	28,000	44,000
	Capacity at 17°F	Max	BTU/H	26,000	32,000	38,000	48,000
	Capacity at 5°F	Max ⁴	BTU/H	26,000	32,000	38,000	48,000
	SEER			21.5	15.6	17.0	14.8
	EER			14.0	12.5	12.6	10.1
Efficiency	HSPF			12	9.4	10	10
	COP			4.31	2.72	3.44	3.02
	ENERGY STAR® Certified			Yes	Yes	Yes	No
	Air Flow Rate - Cooling	Dry	CFM	530-640-710-810	570-670-780-880	670-850-1020-1200	740-920-1060-1200
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	490-600-670-770	530-630-740-840	630-810-980-1160	700-880-1020-1160
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	530-640-710-810	570-670-780-880	670-850-1020-1200	740-920-1060-1200
	Sound Pressure Level	Cooling	dB(A)	28-30-33-36	28-32-35-38	32–37–41–44	34–38–42–45
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	28-30-33-36	28-32-35-38	32–37–41–44	34–38–42–45
Indoor Unit			In. W.G.	_	-	_	_
	Condensate Lift Mechanism	Max Distance In. [mm]		[849]	[849]	[849]	[849]
		Н	In. [mm]	10-5/32 // 1-9/16 [258 // 40]	11-3/4 // 1-9/16 [298 // 40]	11-3/4 // 1-9/16 [298 // 40]	11-3/4 // 1-9/16 [298 // 40]
	Dimensions	W	In. [mm]	33-1/16 // 37-13/32 [840]	33-1/16 // 37-13/32 [840]	33-1/16 // 37-13/32 [840]	33-1/16 // 37-13/32 [840]
		D	In. [mm]	33-1/16 // 37-13/32 [840]	33-1/16 // 37-13/32 [840]	33-1/16 // 37-13/32 [840]	33-1/16 // 37-13/32 [840]
	Weight	lbs [kg]		56 // 11 [25 // 5]	56 // 11 [25 // 5]	56 // 11 [25 // 5]	56 // 11 [25 // 5]
	MCA	Α		19.0	28.0	28.0	37.0
	MOCP	Α		26	40	40	44
		Н	In. [mm]	37-1/8 [943]	53-1/8 [1375]	53-1/8 [1375]	52-11/16 [1338]
	Dimensions	W	In. [mm]	37-13/32 [950]	37-3/8 [950]	37-3/8 [950]	41-3/8 [1051]
Outdoor Unit		D	In. [mm]	13 [+1-3/16] [330 [+30]]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		85 [188]	265 [120]	265 [120]	287 [130]
	Air Flow Rate (Cooling/Heating)	CFM		1940/1940	3530/3530	3530/3530	3320/3320
	Sound Pressure Level	Cooling	dB(A)	52	52	52	49
	Sound i ressure Lever	Heating	dB(A)	53	53	53	51
		Gas (O.D.)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	_	_	_	
	Max. Length	ft [m]		165 [50]	245 [75]	245 [75]	245 [75]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]
Electrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Liectrical	Recommended Breaker Size	Α		25	30	30	40
Refrigerant Type				R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		0.0 to 115.0 [-18.0 to 46.0]			
Operation Range	Heating	°F DB [°C DB]		-13.0 to 70.0 [-25.0 to 21.0]			

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed) Conditions

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) ⁴Heating at 5°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB

70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

[°]Indoor units receive power from outdoor units through field-supplied interconnected wiring.
°Wind baffles required to operate below 23°F DB in cooling mode. PUZ with wind baffle: 0° F - 115° F.



PKA Model

The compact, wall-mounted indoor units offer the convenience of simple installation, and a large product line-up (A12-A36 models) ensures a best-match solution. Designed for highly efficient energy savings, the PKA Model is the answer to your air conditioning needs.



Flat Panel & Pure White Finish

A flat panel design and pure white color that harmonizes with virtually any interior.



PKA-A HA7



PKA-A KA7




Compact Indoor Units

Indoor unit width has been reduced by as much as 20-1/16" (A36KA7). Units take up much less space, greatly increasing installation possibilities.








Energy Saving Performance

 ${\sf SEER/HSPF}\ has\ been\ greatly\ improved,\ realizing\ industry-leading\ energy-saving\ features.$

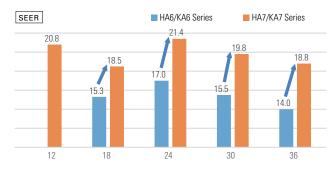



PKA Model


















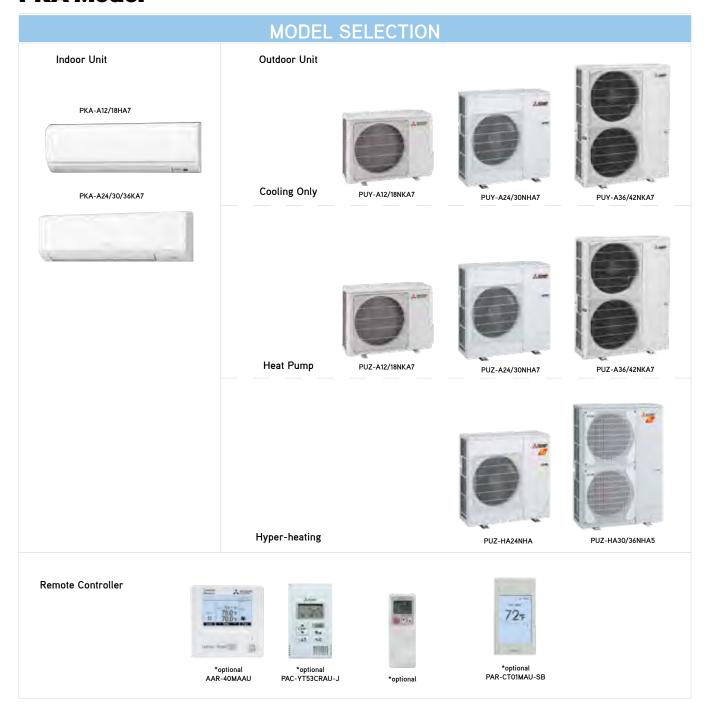

PKA Model COOLING ONLY









Wi-Fi I) (COMPO COMPO Wiring Reuse Ufft Up Down Connection Composit Fallure Recall

















Indoor Unit				PKA-A12HA7	PKA-A18HA7	PKA-A24KA7	PKA-A30KA7	PKA-A36KA7
Outdoor Unit				PUY-A12NKA7(-BS)	PUY-A18NKA7(-BS)	PUY-A24NHA7(-BS)	PUY-A30NHA7(-BS)	PUY-A36NKA7(-BS)
	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	30,000	36,000
	Capacity Range	Min-Max	BTU/H	5,800-12,000	8,000-18,000	10,000–24,000	9,000–30,000	16,000–36,000
Cooling	Power Input	Rated ¹	W	1,000	1,820	1,960	3,150	3,330
	Moisture Removal	Pints/h		2.0	5.2	5.0	8.1	9.7
	Sensible Heat Factor	Sensible Heat Factor		0.810	0.680	0.770	0.700	0.700
	Capacity at 47°F			_	_	_	_	_
	Capacity Range	Min-Max	BTU/H	_	_	_	_	_
	Power Input at 47°F	Rated	W	_	_	_	_	_
Heating		Rated	BTU/H	_	_	_	_	_
	Capacity at 17°F	Max	BTU/H	_	_	_	_	_
	Capacity at 5°F	Max	BTU/H	_	_	_	_	_
	SEER			20.8	18.5	21.4	19.8	18.8
	EER			12.0	9.9	12.2	9.5	10.8
Efficiency	HSPF			_	_	_	_	_
	COP			_	_	_	_	_
	ENERGY STAR® Certified			No	No	No	No	No
	Air Flow Rate - Cooling	Dry	CFM	320-370-425	320-370-425	635–705–775	635–705–775	705–810–920
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	290-335-380	290-335-380	570-635-700	570-635-700	635-730-830
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	320–370–425	320–370–425	635–705–775	635–705–775	705–810–920
	Sound Pressure Level	Cooling	dB(A)	36-40-43	36-40-43	39-42-45	39-42-45	43-46-49
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	36-40-43	36-40-43	39-42-45	39-42-45	43-46-49
ndoor Unit			In. W.G.	_	_	_	_	_
	Condensate Lift Mechanism Max Distance In.		In. [mm]	_	_	_	_	_
	Dimensions	Н	In. [mm]	11-5/8 [295]	11-5/8 [295]	14-3/8 [365]	14-3/8 [365]	14-3/8 [365]
		W	In. [mm]	35-3/8 [898]	35-3/8 [898]	46-1/16 [1170]	46-1/16 [1170]	46-1/16 [1170]
		D	In. [mm]	9-13/16 [249]	9-13/16 [249]	11-5/8 [295]	11-5/8 [295]	11-5/8 [295]
	Weight	lbs [kg]		29 [13]	29 [13]	46 [21]	46 [21]	46 [21]
	MCA	Α		11.0	11.0	19.0	19.0	25.0
	MOCP	Α		28	28	26	26	31
		Н	In. [mm]	24-13/16 [630]	24-13/16 [630]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]
	Dimensions	w	In. [mm]	31-13/16 (+7/16) [809 (+62)]	31-13/16 (+7/16) [809 (+62)]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	11-3/16 [300]	11-3/16 [300]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30
	Weight	lbs [kg]		92 [41]	99 [44]	151 [68]	151 [68]	211 [96]
	Air Flow Rate (Cooling/Heating)	CFM		1590/—	1590/—	1940/—	1940/—	3880/—
	Sound Pressure Level	Cooling	dB(A)	44	44	47	47	52
		Heating	dB(A)		_	_	_	_
		Gas (O.D.)	In. [mm]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	5/8 [16]	5/8 [16]	5/8 [16]	5/8 [16]	5/8 [16]
	Max. Length	ft [m]		165 [50]	165 [50]	225 [68]	225 [68]	225 [68]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
Electrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
	Recommended Breaker Size	A		15	15	25	25	30
Refrigerant Type				R410A	R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		-40.0 to 115.0 [-40.0 to 46.0]				
Operation Rang	e Heating	°F DB [°C DB]		_	_	_	_	_

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor)

۰F 80 DB, 67 WB // 95 DB, 75 WB

⁵Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Wind baffles required to operate below 23°F DB in cooling mode. PUY with wind baffle: -40°F - 115°F. Refer to wind baffle documentation for further information. SEACOAST PROTECTION

- External Outer Panel: Phosphate coating + Acrylic-Enamel coating

 Fan Motor Support: Epoxy resin coating (at edge face)

 Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)

 Blue Fin' treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

PKA Model

























Indoor Unit				PKA-A12HA7	PKA-A18HA7	PKA-A24KA7	PKA-A30KA7	PKA-A36KA7
Outdoor Unit				PUZ-A12NKA7(-BS)	PUZ-A18NKA7(-BS)	PUZ-A24NHA7(-BS)	PUZ-A30NHA7(-BS)	PUZ-A36NKA7(-BS)
	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	30,000	36,000
	Capacity Range	Min-Max	BTU/H	5,800-12,000	8,000-18,000	10,000–24,000	9,000–30,000	16,000–36,000
Cooling	Power Input	Rated ¹	w	1,000	1,820	1,960	3,150	3,330
	Moisture Removal	Pints/h		2.0	5.2	5.0	8.1	9.7
	Sensible Heat Factor	l		0.810	0.680	0.770	0.700	0.700
	Capacity at 47°F	Rated ²	BTU/H	14,000	19,000	26,000	32,000	38,000
	Capacity Range	Min-Max	BTU/H	5,500–18,000	7,700–22,000	9,000–28,000	8,900–34,000	18,200–40,000
	Power Input at 47°F	Rated ²	W	950	1,300	1,750	2,460	2,460
Heating		Rated ³	BTU/H	9.200	11,300	15,700	18,300	22,400
	Capacity at 17°F	Max	BTU/H	11,100	13,900	18,300	21,000	25,900
	Capacity at 5°F	Max ⁴	BTU/H	_	_	_	_	_
	SEER			20.8	18.5	21.4	19.8	18.8
	EER			12.0	9.9	12.2	9.5	10.8
Efficiency	HSPF			10.2	10.2	11	9.9	9.2
	COP			4.31	4.28	4.35	3.81	4.52
	ENERGY STAR® Certified			No	No No	No No	No	No
	Air Flow Rate - Cooling	Dry	CFM	320–370–425	320–370–425	635–705–775	635–705–775	705–810–920
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	290–335–380	290–335–380	570-635-700	570-635-700	635–730–830
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	320–370–425	320–370–425	635–705–775	635–705–775	705–810–920
	,	Cooling	dB(A)	36–40–43	36–40–43	39–42–45	39–42–45	43–46–49
	Sound Pressure Level (Quiet-Lo-Med-Hi-SHi)			36-40-43	36-40-43	39-42-45	39-42-45	43-46-49
ndoor Unit	External Static Pressure	Heating	dB(A)	30-40-43	30-40-43	39-42-45	39-42-45	43-40-49
	Condensate Lift Mechanism	May Distance			_	_	_	_
	Condensate Liit Mechanism	Max Distance				_	_	
	Dimensions	w	In. [mm] In. [mm]	11-5/8 [295] 35-3/8 [898]	11-5/8 [295] 35-3/8 [898]	14-3/8 [365] 46-1/16 [1170]	14-3/8 [365] 46-1/16 [1170]	14-3/8 [365] 46-1/16 [1170]
	Differsions	D	In. [mm]	9-13/16 [249]	9-13/16 [249]	11-5/8 [295]	11-5/8 [295]	11-5/8 [295]
	Weight		III. [HIIII]					
	Weight MCA	lbs [kg]		11.0	29 [13] 29 [13] 46 [21] 11.0 11.0 19.0		46 [21] 19.0	46 [21] 25.0
	MOCP	A		28	28	19.0 26	26	25.0
	WIOCF	Н	In farmal	24-13/16 [630]	24-13/16 [630]	37-1/8 [943]	37-1/8 [943]	_
	Dimensions	w	In. [mm]	31-13/16 (+7/16) [809	31-13/16 (+7/16) [809	37-1/6 [945]	37-1/6 [945]	52-11/16 [1338] 41-5/16 [1050]
Outdoor Unit		D		(+62)]	(+62)]			• •
Jutdoor Unit	\\\-:-\-\		In. [mm]	11-3/16 [300]	11-3/16 [300]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30
	Weight Air Flow Rate	lbs [kg] CFM		93 [42]	100 [45] 1590/1590	153 [69] 1940/1940	153 [69] 1940/1940	214 [97] 3880/3880
	(Cooling/Heating)		-ID(A)					
	Sound Pressure Level	Cooling	dB(A)	44	44	47	47	52
		Heating Gas (O.D.)	dB(A)	46	46	48	48 5/8 [15.88]	53 5/8 [15.88]
	Diameter	· · ·	In. [mm]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]		
Nata -	Diameter	Liquid (O.D) Indoor Drain	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping	Man Lamette		In. [mm]	5/8 [16]	5/8 [16]	5/8 [16]	5/8 [16]	5/8 [16]
	Max. Length	ft [m]		100 [30]	100 [30]	165 [50]	165 [50]	165 [50]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
Electrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
	Recommended Breaker Size	A		15	15	25	25	30
Refrigerant Type				R410A 0.0 to 115.0	R410A 0.0 to 115.0	R410A 0.0 to 115.0	R410A 0.0 to 115.0	R410A 0.0 to 115.0
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		[-18.0 to 46.0]	[-18.0 to 46.0]	[-18.0 to 46.0]	[-18.0 to 46.0]	[-18.0 to 46.0]
Operation Range	Heating	°F DB [°C DB]		12.0 to 70.0 [-11.0 to 21.0]	12.0 to 70.0 [-11.0 to 21.0]	-4.0 to 70.0 [-20.0 to 21.0]	-4.0 to 70.0 [-20.0 to 21.0]	-4.0 to 70.0 [-20.0 to 21.0]

Notes: AHRI Rated Conditions ¹Cooling (Indoor // Outdoor) 80 DB, 67 WB // 95 DB, 75 WB °F °F °F (Rated data is determined at a fixed compressor speed) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB Conditions 4Heating at 5°F (Indoor // Outdoor) 70 DB, 60 WB // 5 DB, 4 WB

**rleating at 5°F (Indoor // Outdoor)

**rleating at 5°F

- External Outer Panel: Phosphate coating + Acrylic-Enamel coating
- Fan Motor Support: Epoxy resin coating (at edge face)
 Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)
- "Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

PKA Model HYPER-HEATING









Wi-Fi ı) | COMPO | Wiring | Drain | Pump | Flave | Down | Flave | Commection | Flave | Commection | Flave | Commection | Flave | Commection | Flave | Commercial | Flave | Commercial | Flave | Flave

















Indoor Unit				PKA-A24KA7	PKA-A30KA7	PKA-A36KA7
Outdoor Unit				PUZ-HA24NHA	PUZ-HA30NHA5	PUZ-HA36NHA5
	Capacity	Rated ¹	BTU/H	24,000	30,000	33,400
	Capacity Range	Min-Max	BTU/H	10,000–24,000	18,000	18,000
ooling	Power Input	Rated ¹	W	1,900	2,500	2,790
	Moisture Removal	Pints/h		5.0	8.1	8.7
	Sensible Heat Factor			0.770	0.700	0.710
	Capacity at 47°F	Rated ²	BTU/H	26,000	32,000	38,000
	Capacity Range	Min-Max	BTU/H	10,000–28,000	18,000–34,000	18,000-40,000
	Power Input at 47°F	Rated ²	W	1,920	2,930	3,410
leating	Oitt 470E	Rated ³	BTU/H	17,200	19,000	25,000
	Capacity at 17°F	Max	BTU/H	26,000	32,000	38,000
	Capacity at 5°F	Max ⁴	BTU/H	26,000	32,000	38,000
	SEER			19.5	16.5	16.2
	EER			12.6	12.0	12.0
fficiency	HSPF			11.2	9.5	10
	COP			3.8	3.2	3.26
	ENERGY STAR® Certified			Yes	No	No
	Air Flow Rate - Cooling	Dry	CFM	635–705–775	635–705–775	705–810–920
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	570-635-700	570–635–700	635-730-830
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	635–705–775	635–705–775	705–810–920
	Sound Pressure Level Cooling		dB(A)	39–42–45	39–42–45	43–46–49
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	39-42-45	39–42–45	43–46–49
ndoor Unit	External Static Pressure In. W.G.		In. W.G.	_	_	_
	Condensate Lift Mechanism	Max Distance In. [mm]		_	_	_
		Н	In. [mm]	14-3/8 [365]	14-3/8 [365]	14-3/8 [365]
	Dimensions	W	In. [mm]	46-1/16 [1170]	46-1/16 [1170]	46-1/16 [1170]
		D In. [mm]		11-5/8 [295]	11-5/8 [295]	11-5/8 [295]
	Weight	lbs [kg]		46 [21]	46 [21]	46 [21]
	MCA	Α		19.0	28.0	28.0
	MOCP	Α		26	40	40
		Н	In. [mm]	37-1/8 [943]	53-1/8 [1375]	53-1/8 [1375]
	Dimensions	W	In. [mm]	37-13/32 [950]	37-3/8 [950]	37-3/8 [950]
Outdoor Unit		D	In. [mm]	13 [+1-3/16] [330 [+30]]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		85 [188]	265 [120]	265 [120]
	Air Flow Rate (Cooling/Heating)	CFM		1940/1940	3530/3530	3530/3530
	Sound Pressure Level	Cooling	dB(A)	52	52	52
	Sound i ressure Level	Heating	dB(A)	53	53	53
		Gas (O.D.)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
iping		Indoor Drain	In. [mm]	5/8 [16]	5/8 [16]	5/8 [16]
	Max. Length	ft [m]		165 [50]	245 [75]	245 [75]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]
lectrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
iouliuai	Recommended Breaker Size	Α		25	30	30
Refrigerant Type				R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		0.0 to 115.0 [-18.0 to 46.0]	0.0 to 115.0 [-18.0 to 46.0]	0.0 to 115.0 [-18.0 to 46.0]
Operation Range	Heating	°F DB [°C DB]		-13.0 to 70.0 [-25.0 to 21.0]	-13.0 to 70.0 [-25.0 to 21.0]	-13.0 to 70.0 [-25.0 to 21.0]
		1		[-20.0 10 2 1.0]	[-23.0 to 21.0]	[-20.0 to 21.0]

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) ⁴Heating at 5°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB °F °F °F

Conditions °Indoor units receive power from outdoor units through field-supplied interconnected wiring.
°Wind baffles required to operate below 23°F DB in cooling mode. PUZ with wind baffle: 0° F - 115° F.



PVA Model

The PVA air handler is truly multi-positional offering up, down, left or right airflow, making it ideal for tight and unique spaces.




Flexibility

The PVA air handler is truly multi-positional* offering up, down, left or right airflow, making it ideal for tight and unique spaces.



High Energy Efficiency

The PVA Model has high SEER, and is highly energy efficient compared to outdated unitary air conditioners.

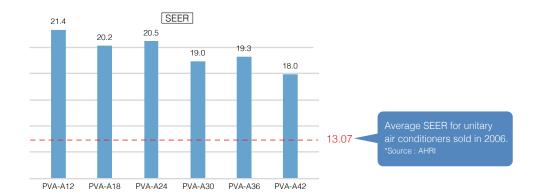

Interlocking Function

The PVA Model has an output terminal which allows it to interlock with other appliances such as humidifiers and dehumidifiers.

Thermostat Control

Using the Thermostat Interface (PAC-US444CN-1), the user can replace their unitary air conditioner without changing the thermostat.

Durability

The cabinet is made of galvanized metal with a black ZAM (zinc, aluminum, magnesium) hot dip coated steel finish. The internal fan, coil, piping and circuitry are engineered and designed to work in harmony to provide years of reliable operation.



 ${}^{\star}\text{CMA}$ accessory recommended for downflow applications.

Power Inverter Model

















MODEL SELECTION **Outdoor Unit**





PVA-A12/18/24/30/36/42AA7



Cooling Only PUY-A12/18NKA7



PUY-A24/30NHA7



PUY-A36/42NKA7



Heat Pump PUZ-A12/18NKA7



PUZ-A24/30NHA7



PUZ-A36/42NKA7



Hyper-heating

PUZ-HA24NHA



PUZ-HA30/36NHA5



PUZ-HA42NKA

Remote Controller



*optional AAR-40MAAU



*optional



*optional PAR-CT01MAU-SB



























Ориска			Ориона						
Wi-Fi)) Interface	СОМРО	Cleaning-line,	Wiring Reuse Optional	Drain Lift Up	Pump Down	Flare connection	Self Diagnosis	Failure Recall	

Indoor Unit				PVA-A12AA7	PVA-A18AA7	PVA-A24AA7	PVA-A30AA7	PVA-A36AA7	PVA-A42AA7
Outdoor Unit				PUY-A12NKA7(-BS)	PUY-A18NKA7(-BS)	PUY-A24NHA7(-BS)	PUY-A30NHA7(-BS)	PUY-A36NKA7(-BS)	PUY-A42NKA7(-BS)
	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	30,000	36,000	42,000
	Capacity Range	Min-Max	BTU/H	4,800–12,000	7,000–18,000	10,000–24,000	10,000–30,000	14,600–36,000	15,000-42,000
Cooling	Power Input	Rated ¹	W	890	1,570	1,960	3,000	3,250	4,150
	Moisture Removal	Pints/h		1.2	2.4	3.0	5.4	4.5	7.9
	Sensible Heat Factor			0.770	0.760	0.830	0.740	0.770	0.810
	Capacity at 47°F	Rated	BTU/H	_	_	_	_	_	_
	Capacity Range	Min-Max	BTU/H	_	_	_	_	_	_
	Power Input at 47°F	Rated	W	_	_	_	_	_	_
Heating	0 1 14705	Rated	BTU/H	_	_	_	_	_	_
	Capacity at 17°F	Max	BTU/H	_	_	_	_	_	_
	Capacity at 5°F	Max	BTU/H	_	_	_	_	_	_
	SEER			21.4	20.2	20.5	19.0	19.3	18.0
	EER			13.4	11.4	12.2	10.0	9.8	10.1
Efficiency	HSPF			-	_	_	_	_	_
	COP			_	_	_	_	_	_
	ENERGY STAR® Certified			Yes	No	No	No	No	No
	Air Flow Rate - Cooling	Dry	CFM	280-340-400	515-625-735	613–744–875	613–744–875	788–956–1125	1040-1262-1485
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	_	_	_	_	_	_
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	280-340-400	515–625–735	613–744–875	613–744–875	788–956–1125	1040-1262-1485
	Sound Pressure Level	Cooling	dB(A)	24–28–32	28-33-36	30–34–38	30–34–38	30–34–38	34–38–42
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	24-28-32	28-33-36	30-34-38	30-34-38	30-34-38	34-38-42
Indoor Unit	External Static Pressure		In. W.G.	0.3-0.5-0.8	0.3-0.5-0.8	0.3-0.5-0.8	0.3-0.5-0.8	0.3-0.5-0.8	0.3-0.5-0.8
	Condensate Lift Mechanism	Max Distance	In. [mm]	_	_	_	_	_	_
		Н	In. [mm]	50-1/4 [1275]	50-1/4 [1275]	54-1/4 [1378]	54-1/4 [1378]	59-1/2 [1511]	59-1/2 [1511]
	Dimensions	W	In. [mm]	17 [432]	17 [432]	21 [534]	21 [534]	25 [635]	25 [635]
		D	In. [mm]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]
	Weight	lbs [kg]		113 [51.2]	113 [51.2]	141 [64]	141 [64]	172 [78]	172 [78]
	MCA	Α		11.0	11.0	19.0	19.0	25.0	25.0
	MOCP	Α		28	28	26	26	31	31
		Н	In. [mm]	24-13/16 [630]	24-13/16 [630]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	w	In. [mm]	31-13/16 (+7/16) [809 (+62)]	31-13/16 (+7/16) [809 (+62)]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	11-3/16 [300]	11-3/16 [300]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		92 [41]	99 [44]	151 [68]	151 [68]	211 [96]	211 [96]
	Air Flow Rate (Cooling/Heating)	CFM		1590/—	1590/—	1940/—	1940/—	3880/—	3880/—
	Sound Pressure Level	Cooling	dB(A)	44	44	47	47	52	52
	Country 1000016 Level	Heating	dB(A)	_	_	_	_	_	_
		Gas (O.D.)	In. [mm]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	3/4 FPT [19.05]					
	Max. Length	ft [m]		165 [50]	165 [50]	225 [68]	225 [68]	225 [68]	225 [68]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
Electrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
	Recommended Breaker Size	Α		15	15	25	25	30	30
Refrigerant Type				R410A	R410A	R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		-40.0 to 115.0 [-40.0 to 46.0]					
Operation Range	Heating	°F DB [°C DB]		_	_	_	_	_	_

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor)

°F 80 DB, 67 WB // 95 DB, 75 WB

Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Wind baffles required to operate below 23°F DB in cooling mode. PUY with wind baffle: -40°F - 115°F. Refer to wind baffle documentation for further information.

SEACOAST PROTECTION

- External Outer Panel: Phosphate coating + Acrylic-Enamel coating

 Fan Motor Support: Epoxy resin coating (at edge face)

 Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)

 "Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

























Indoor Unit				PVA-A12AA7	PVA-A18AA7	PVA-A24AA7	PVA-A30AA7	PVA-A36AA7	PVA-A42AA7
Outdoor Unit				PUZ-A12NKA7(-BS)	PUZ-A18NKA7(-BS)	PUZ-A24NHA7(-BS)	PUZ-A30NHA7(-BS)	PUZ-A36NKA7(-BS)	PUZ-A42NKA7(-BS)
	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	30,000	36,000	42,000
	Capacity Range	Min-Max	BTU/H	4,800–12,000	7,000–18,000	10,000–24,000	10,000–30,000	14,600–36,000	15,000-42,000
Cooling	Power Input	Rated ¹	W	890	1,570	1,960	3,000	3,250	4,150
	Moisture Removal	Pints/h		1.2	2.4	3.0	5.4	4.5	7.9
	Sensible Heat Factor			0.770	0.760	0.830	0.740	0.770	0.810
	Capacity at 47°F	Rated ²	BTU/H	14,000	19,000	26,000	32,000	38,000	46,000
	Capacity Range	Min-Max	BTU/H	5,700-19,000	7,700–23,000	12,000–28,000	12,000-34,000	17,700–42,000	18,100-48,000
	Power Input at 47°F	Rated ²	W	1,070	1,470	1,920	2,640	3,030	3,900
Heating		Rated ³	BTU/H	9,900	12,000	15,000	18,000	24,000	28,400
	Capacity at 17°F	Max	BTU/H	12,000	14,700	17,500	20,700	27,800	31,400
	Capacity at 5°F	Max ⁴	BTU/H	_	_	_	_	_	_
	SEER			21.4	20.2	20.5	19.0	19.3	18.0
	EER			13.4	11.4	12.2	10.0	9.8	10.1
Efficiency	HSPF			10.3	10.4	9.3	10	9.5	9.3
	COP			3.82	3.78	3.96	3.54	3.66	3.44
	ENERGY STAR® Certified			Yes	No	No	No	No	No
	Air Flow Rate - Cooling	Dry	CFM	280-340-400	515-625-735	613–744–875	613–744–875	788–956–1125	1040-1262-1485
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	_	_	_	_	_	_
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	280-340-400	515–625–735	613–744–875	613–744–875	788–956–1125	1040-1262-1485
	Sound Pressure Level	Cooling	dB(A)	24-28-32	28-33-36	30-34-38	30–34–38	30-34-38	34–38–42
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	24-28-32	28-33-36	30-34-38	30-34-38	30–34–38	34–38–42
Indoor Unit	External Static Pressure	In. W.G.		0.3-0.5-0.8	0.3-0.5-0.8	0.3-0.5-0.8	0.3-0.5-0.8	0.3-0.5-0.8	0.3-0.5-0.8
	Condensate Lift Mechanism	Max Distance	In. [mm]	_	_	_	_	_	_
		Н	In. [mm]	50-1/4 [1275]	50-1/4 [1275]	54-1/4 [1378]	54-1/4 [1378]	59-1/2 [1511]	59-1/2 [1511]
	Dimensions	W	In. [mm]	17 [432]	17 [432]	21 [534]	21 [534]	25 [635]	25 [635]
		D	In. [mm]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]
	Weight	lbs [kg]		113 [51.2]	113 [51.2]	141 [64]	141 [64]	172 [78]	172 [78]
	MCA	Α		11.0	11.0	19.0	19.0	25.0	25.0
	MOCP	Α		28	28	26	26	31	31
		Н	In. [mm]	24-13/16 [630]	24-13/16 [630]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	w	In. [mm]	31-13/16 (+7/16) [809 (+62)]	31-13/16 (+7/16) [809 (+62)]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	11-3/16 [300]	11-3/16 [300]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		93 [42]	100 [45]	153 [69]	153 [69]	214 [97]	214 [97]
	Air Flow Rate (Cooling/Heating)	CFM		1590/1590	1590/1590	1940/1940	1940/1940	3880/3880	3880/3880
	Count Decrees I and	Cooling	dB(A)	44	44	47	47	52	52
	Sound Pressure Level	Heating	dB(A)	46	46	48	48	53	53
		Gas (O.D.)	In. [mm]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	3/4 FPT [19.05]					
	Max. Length	ft [m]		100 [30]	100 [30]	165 [50]	165 [50]	165 [50]	165 [50]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
Electrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Licuital	Recommended Breaker Size	Α		15	15	25	25	30	30
Refrigerant Type				R410A	R410A	R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		0.0 to 115.0 [-18.0 to 46.0]					
Operation Range	Heating	°F DB [°C DB]		12.0 to 70.0 [-11.0 to 21.0]	12.0 to 70.0 [-11.0 to 21.0]	-4.0 to 70.0 [-20.0 to 21.0]			

Notes:

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) 80 DB, 67 WB // 95 DB, 75 WB

°F 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB

Conditions 'Frequing at 17°F (Indoor // Outdoor) 'Frequency at 5°F (Indoor units receive power from outdoor units through field-supplied interconnected wiring.

"Wind baffles required to operate below 23°F DB in cooling mode. PUZ with wind baffle: 0°F - 115°F. Refer to wind baffle documentation for further information. SEACOAST PROTECTION

- External Outer Panel: Phosphate coating + Acrylic-Enamel coating

 Fan Motor Support: Epoxy resin coating (at edge face)

 Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)

 "Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

PVA Model HYPER-HEATING









Wi-Fi i) COMPO Wiring Reuse Drain Lift Up Down Connection Flare Connection Facult Facult

















Indoor Unit				PVA-A24AA7	PVA-A30AA7	PVA-A36AA7	PVA-A42AA7
Outdoor Unit				PUZ-HA24NHA	PUZ-HA30NHA5	PUZ-HA36NHA5	PUZ-HA42NKA
	Capacity	Rated ¹	BTU/H	24,000	28,400	33,000	42,000
	Capacity Range	Min-Max	BTU/H	10,000–24,000	18,000	18,000	19,000
Cooling	Power Input	Rated ¹	w	2,100	2,280	2,640	4,270
	Moisture Removal	Pints/h		3.7	8.0	7.9	9.0
	Sensible Heat Factor			0.830	0.700	0.740	0.760
	Capacity at 47°F	Rated ²	BTU/H	26,000	32,000	38,000	48,000
	Capacity Range	Min-Max	BTU/H	10,000–28,000	18,000–34,000	18,000-40,000	18,000–54,000
	Power Input at 47°F	Rated ²	W	1,980	2,590	3,040	4,010
Heating		Rated ³	BTU/H	17,500	22,600	29,000	42,400
	Capacity at 17°F	Max	BTU/H	26,000	32,000	38,000	48,000
	Capacity at 5°F	Max ⁴	BTU/H	26,000	32,000	38,000	48,000
	SEER			19.0	17.0	17.8	15.3
	EER			11.5	12.5	12.5	9.8
Efficiency	HSPF			11	9.7	11	11
	COP			3.7	3.62	3.66	3.14
	ENERGY STAR® Certified			No	Yes	Yes	No
	Air Flow Rate - Cooling	Dry	CFM	613–744–875	613–744–875	788–956–1125	1040-1262-1485
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	-	_	-	-
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	613–744–875	613–744–875	788–956–1125	1040–1262–1485
	Sound Pressure Level	Cooling	dB(A)	30-34-38	30–34–38	30–34–38	34–38–42
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	30–34–38	30–34–38	30–34–38	34–38–42
Indoor Unit	External Static Pressure In. W.G.		In. W.G.	0.3-0.5-0.8	0.3-0.5-0.8	0.3-0.5-0.8	0.3-0.5-0.8
	Condensate Lift Mechanism	n Max Distance In. [-	-	_	_
		Н	In. [mm]	54-1/4 [1378]	54-1/4 [1378]	59-1/2 [1511]	59-1/2 [1511]
	Dimensions	W	In. [mm]	21 [534]	21 [534]	25 [635]	25 [635]
		D	In. [mm]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]
	Weight	lbs [kg]		141 [64]	141 [64]	172 [78]	172 [78]
	MCA	Α		19.0	28.0	28.0	37.0
	MOCP	Α		26	40	40	44
		Н	In. [mm]	37-1/8 [943]	53-1/8 [1375]	53-1/8 [1375]	52-11/16 [1338]
	Dimensions	W	In. [mm]	37-13/32 [950]	37-3/8 [950]	37-3/8 [950]	41-3/8 [1051]
Outdoor Unit		D	In. [mm]	13 [+1-3/16] [330 [+30]]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		85 [188]	265 [120]	265 [120]	287 [130]
	Air Flow Rate (Cooling/Heating)	CFM		1940/1940	3530/3530	3530/3530	3320/3320
	Sound Pressure Level	Cooling	dB(A)	52	52	52	49
	Country 1000dio 2010i	Heating	dB(A)	53	53	53	51
		Gas (O.D.)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	3/4 FPT [19.05]	3/4 FPT [19.05]	3/4 FPT [19.05]	3/4 FPT [19.05]
	Max. Length	ft [m]		165 [50]	245 [75]	245 [75]	245 [75]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]
Electrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
	Recommended Breaker Size	Α		25	30	30	40
Refrigerant Type	1			R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		0.0 to 115.0 [-18.0 to 46.0]			
Operation Range	Heating	°F DB [°C DB]		-13.0 to 70.0 [-25.0 to 21.0]			

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) ⁴Heating at 5°F (Indoor // Outdoor)

°F °F °F 80 DB, 67 WB // 95 DB, 75 WB

70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

Conditions °Indoor units receive power from outdoor units through field-supplied interconnected wiring.
°Wind baffles required to operate below 23°F DB in cooling mode. PUZ with wind baffle: 0° F - 115° F.



PEAD Model

The thin, ceiling-concealed indoor units of this model are the perfect answer for the air conditioning needs of buildings with minimum ceiling installation space and wide-ranging external static pressure. Energy-saving efficiency has been improved, reducing electricity consumption and contributing to a further reduction in operating cost.



Compact Indoor Units

The height is only 9-7/8" for all sizes of this model from 12 to 42 kBTU/H. This makes it possible for the unit to be installed in low ceilings with minimal clearance space.



External Static Pressure


External static pressure conversion can be set up to five settings. Capable of being set to a maximum of 0.60 ln.W.G., units are applicable to a wide range of building types.


■ External static pressure

Model	12	18	24	30	36	42
PEAD-A AA		0.14-0.2	20-0.28-0	.40-0.60	ln. W.G.	

High Energy Efficiency

SEER/HSPF has been greatly improved, and 12,000/18,000 BTU/H models have been added to the line-up.

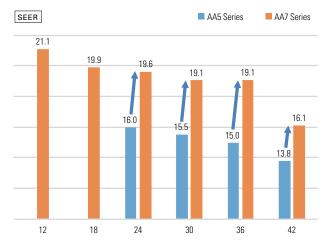

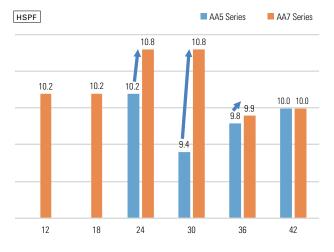

Built-in Drain Lift Mechanism

All models feature a built-in drain lift mechanism for removal of condensate. The unit's fail-safe mechanism recognizes when there is a high liquid level in the condensate pan and turns off the indoor fan and the outdoor unit compressor to prevent overflow.

PEAD Model


















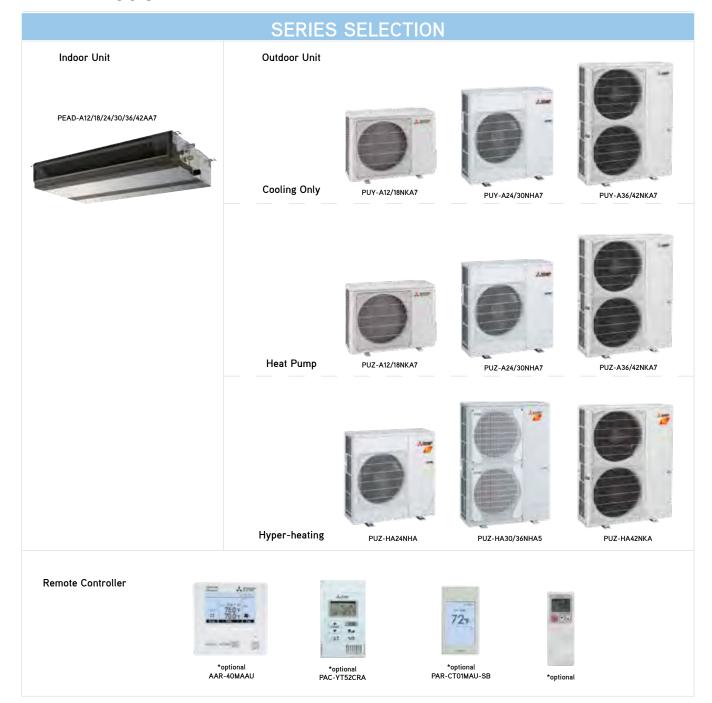

























PEAD Model	Optional Wi-Fi 1)		Wiring	Drain	Pump	Flare	C Failure	
COOLING ONLY	Interface Optional	Chaning reus	Reuse	Lift Up	Down	Flare connection Diag	Self Recall	

Indoor Unit				PEAD-A12AA7	PEAD-A18AA7	PEAD-A24AA7	PEAD-A30AA7	PEAD-A36AA7	PEAD-A42AA7
Outdoor Unit	-			PUY-A12NKA7(-BS)	PUY-A18NKA7(-BS)	PUY-A24NHA7(-BS)	PUY-A30NHA7(-BS)	PUY-A36NKA7(-BS)	PUY-A42NKA7(-BS)
	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	30,000	36,000	42,000
	Capacity Range	Min-Max	BTU/H	5,000–12,000	8,000–18,000	10,000–24,000	9,000–30,000	16,000–36,000	16,000–42,000
Cooling	Power Input	Rated ¹	W	920	1,660	2,050	3,000	3,000	3,920
ŭ	<u> </u>	Dinto/b		1.0	0.7	6.0	9.6	0.4	0.0
	Moisture Removal	Pints/h		1.8	3.7	6.9	8.6	8.1	9.0
	Sensible Heat Factor			0.830	0.770	0.680	0.680	0.750	0.760
	Capacity at 47°F	Rated	BTU/H	_	_	_	_	_	_
	Capacity Range	Min-Max	BTU/H	-	-	-	-	-	-
Heating	Power Input at 47°F	Rated	W	-	_	-	_	-	_
J	Capacity at 17°F	Rated	BTU/H	_	_	_	_	_	_
		Max	BTU/H	-	-	-	-	-	_
	Capacity at 5°F	Max	BTU/H	_	_	-	_	-	_
	SEER			21.1	19.9	19.6	19.1	19.1	16.1
	EER			13.0	10.8	11.7	10.0	12.0	10.7
Efficiency	HSPF			-	-	-	-	-	-
	COP			-	-	-	-	-	-
	ENERGY STAR® Certified			Yes	No	No	No	No	No
	Air Flow Rate - Cooling	Dry	CFM	353-424-494	424-512-600	512-636-742	618-742-883	847-1024-1201	1042-1254-1483
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	318–382–445	382-461-540	461–572–667	556-668-795	762–922–1081	1002-1214-1443
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	353-424-494	424–512–600	512–636–742	618–742–883	847–1024–1201	1042–1254–1483
	Sound Pressure Level	Cooling	dB(A)	28–30–34	30–33–37	30–33–37	30–34–39	33–38–42	36-40-44
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	28–30–34	30–33–37	30–33–37	30–34–39	33–38–42	36-40-44
Indoor Unit				0.14-0.2-0.28-	0.14-0.2-0.28-	0.14-0.2-0.28-	0.14-0.2-0.28-	0.14-0.2-0.28-	0.14-0.2-0.28-
maddi dim	External Static Pressure In. W.G.		0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6	
	Condensate Lift Mechanism	Max Distance	In. [mm]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]
	Dimensions	Н	In. [mm]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]
		W	In. [mm]	35-7/16 [900]	35-7/16 [900]	43-5/16 [1100]	43-5/16 [1100]	55-1/8 [1400]	55-1/8 [1400]
		D	In. [mm]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]
	Weight	lbs [kg]		58 [26]	62 [28]	69 [31]	69 [31]	86 [39]	91 [41]
	MCA	Α		11.0	11.0	19.0	19.0	25.0	25.0
	MOCP	Α		28	28	26	26	31	31
		Н	In. [mm]	24-13/16 [630]	24-13/16 [630]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	w	In. [mm]	31-13/16 (+7/16) [809 (+62)]	31-13/16 (+7/16) [809 (+62)]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	11-3/16 [300]	11-3/16 [300]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		92 [41]	99 [44]	151 [68]	151 [68]	211 [96]	211 [96]
	Air Flow Rate (Cooling/Heating)	CFM		1590/—	1590/—	1940/—	1940/—	3880/—	3880/—
		Cooling	dB(A)	44	44	47	47	52	52
	Sound Pressure Level	Heating	dB(A)	_	_	_	_	_	_
		Gas (O.D.)	In. [mm]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
i ipirig	May Length		are from ril					225 [68]	
	Max. Length Max. Height	ft [m]		165 [50] 100 [30]	165 [50] 100 [30]	225 [68] 100 [30]	225 [68] 100 [30]	100 [30]	225 [68] 100 [30]
	Outdoor-Indoor 5							208/230, 1, 60	
Electrical		V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60		208/230, 1, 60
	Recommended Breaker Size A		15	15	25	25	30	30	
Refrigerant Type	T			R410A	R410A	R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		-40.0 to 115.0 [-40.0 to 46.0]					
Operation Range	Heating °F DB [°C DB]		_	_	_	_	_	_	

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor)

°F 80 DB, 67 WB // 95 DB, 75 WB

**Pindoor units receive power from outdoor units through field-supplied interconnected wiring.

**Wind baffles required to operate below 23°F DB in cooling mode. PUY with wind baffle: -40°F - 115°F. Refer to wind baffle documentation for further information.

- SEACOAST PROTECTION

 External Outer Panel: Phosphate coating + Acrylic-Enamel coating

- Fan Motor Support: Epoxy resin coating (at edge face)
 Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)
 "Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

PEAD Model























Indoor Unit				PEAD-A12AA7	PEAD-A18AA7	PEAD-A24AA7	PEAD-A30AA7	PEAD-A36AA7	PEAD-A42AA7
Outdoor Unit				PUZ-A12NKA7(-BS)	PUZ-A18NKA7(-BS)	PUZ-A24NHA7(-BS)	PUZ-A30NHA7(-BS)	PUZ-A36NKA7(-BS)	PUZ-A42NKA7(-BS)
	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	30,000	36,000	42,000
	Capacity Range	Min-Max	BTU/H	5,000-12,000	8,000-18,000	10,000–24,000	9,000–30,000	16,000–36,000	16,000-42,000
Cooling	Power Input	Rated ¹	w	920	1,660	2,050	3,000	3,000	3,920
	Moisture Removal	Pints/h		1.8	3.7	6.9	8.6	8.1	9.0
	Sensible Heat Factor	,		0.830	0.770	0.680	0.680	0.750	0.760
	Capacity at 47°F	Rated ²	BTU/H	14,000	19,000	26,000	32,000	38,000	45,000
	Capacity Range	Min-Max	BTU/H	5,800–18,000	7,900–22,000	9,000–28,000	8,800–34,000	18,200-40,000	18,100-48,000
Heating	Power Input at 47°F	Rated ²	W	1,030	1,400	1,750	2,490	2,410	3,290
	0 1 14705	Rated ³	BTU/H	8,700	11,000	14,800	18,500	20,800	30,600
	Capacity at 17°F	Max	BTU/H	10,500	13,500	17,200	21,200	24,200	33,700
	Capacity at 5°F	Max ⁴	BTU/H	-	-	-	-	-	-
	SEER			21.1	19.9	19.6	19.1	19.1	16.1
	EER			13.0	10.8	11.7	10.0	12.0	10.7
Efficiency	HSPF			10.2	10.2	10.8	10.8	9.9	10
	COP			3.98	3.97	4.35	3.76	4.62	4.0
	ENERGY STAR® Certified			Yes	No	No	No	No	No
	Air Flow Rate - Cooling	Dry	CFM	353-424-494	424-512-600	512-636-742	618–742–883	847-1024-1201	1042-1254-1483
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	318-382-445	382-461-540	461–572–667	556-668-795	762-922-1081	1002-1214-1443
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	353-424-494	424–512–600	512-636-742	618-742-883	847–1024–1201	1042–1254–1483
	Sound Pressure Level	Cooling	dB(A)	28-30-34	30–33–37	30–33–37	30–34–39	33–38–42	36-40-44
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	28-30-34	30–33–37	30–33–37	30–34–39	33–38–42	36-40-44
Indoor Unit	External Static Pressure In. W.G.		0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	
	Condensate Lift Mechanism	Max Distance In. [mm]		27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]
	Dimensions	Н	In. [mm]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]
		W	In. [mm]	35-7/16 [900]	35-7/16 [900]	43-5/16 [1100]	43-5/16 [1100]	55-1/8 [1400]	55-1/8 [1400]
		D	In. [mm]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]
	Weight	lbs [kg]		58 [26]	62 [28]	69 [31]	69 [31]	86 [39]	91 [41]
	MCA	Α		11.0	11.0	19.0	19.0	25.0	25.0
	MOCP	Α		28	28	26	26	31	31
		Н	In. [mm]	24-13/16 [630]	24-13/16 [630]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	w	In. [mm]	31-13/16 (+7/16) [809 (+62)]	31-13/16 (+7/16) [809 (+62)]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	11-3/16 [300]	11-3/16 [300]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		93 [42]	100 [45]	153 [69]	153 [69]	214 [97]	214 [97]
	Air Flow Rate (Cooling/Heating)	CFM		1590/1590	1590/1590	1940/1940	1940/1940	3880/3880	3880/3880
	Sound Pressure Level	Cooling	dB(A)	44	44	47	47	52	52
	Sound Flessure Level	Heating	dB(A)	46	46	48	48	53	53
		Gas (O.D.)	In. [mm]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
	Max. Length	ft [m]		100 [30]	100 [30]	165 [50]	165 [50]	165 [50]	165 [50]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
Electrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
	Recommended Breaker Size	Α		15	15	25	25	30	30
Refrigerant Type				R410A	R410A	R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		0.0 to 115.0 [-18.0 to 46.0]					
Operation Range	Heating	°F DB [°C DB]		12.0 to 70.0 [-11.0 to 21.0]	12.0 to 70.0 [-11.0 to 21.0]	-4.0 to 70.0 [-20.0 to 21.0]			

AHRI Rated Conditions

'Cooling (Indoor // Outdoor)

AHRI Rated Conditions

'Cooling (Indoor // Outdoor)

AHRI Rated Conditions

'Heating at 47°F (Indoor // Outdoor)

'F 70 DB, 60 WB // 47 DB, 43 WB

at a fixed compressor speed)

'Heating at 17°F (Indoor // Outdoor)

'F 70 DB, 60 WB // 47 DB, 43 WB

Conditions

'Heating at 15°F (Indoor // Outdoor)

'F 70 DB, 60 WB // 17 DB, 15 WB

Conditions

'Indoor units receive power from outdoor units through field-supplied interconnected wiring.

'Wind baffles required to operate below 23°F DB in cooling mode. PUZ with wind baffle: 0° F - 115° F. Refer to wind baffle documentation for further information.

SEACOAST PROTECTION

External Outer Panel: Phosphate coefficient Aurilians

- External Outer Panel: Phosphate coating + Acrylic-Enamel coating
 Fan Motor Support: Epoxy resin coating (at edge face)

- Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)
 "Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

PEAD Model









Wi-Fi i) COMPO Wiring Reuse Drain Lift Up Down Connection Flare Connection Facult Facult

















Indoor Unit				PEAD-A24AA7	PEAD-A30AA7	PEAD-A36AA7	PEAD-A42AA7
Outdoor Unit				PUZ-HA24NHA	PUZ-HA30NHA5	PUZ-HA36NHA5	PUZ-HA42NKA
	Capacity	Rated ¹	BTU/H	24,000	27,000	33,000	42,000
	Capacity Range	Min-Max	BTU/H	10,000–24,000	18,000	18,000	19,000
Cooling	Power Input	Rated ¹	w	2,080	2,160	2,640	4,200
	Moisture Removal	Pints/h		6.9	8.9	7.3	9.0
	Sensible Heat Factor			0.680	0.670	0.760	0.760
	Capacity at 47°F	Rated ²	BTU/H	25,000	32,000	38,000	48,000
	Capacity Range	Min-Max	BTU/H	10,000–28,000	18,000–34,000	18,000–40,000	21,000–54,000
	Power Input at 47°F	Rated ²	W	1,920	2,750	3,150	3,800
Heating	Capacity at 17°F	Rated ³	BTU/H	18,000	19,000	27,000	43,000
	Capacity at 17°F	Max	BTU/H	25,000	32,000	38,000	48,000
	Capacity at 5°F	Max ⁴	BTU/H	25,000	32,000	38,000	48,000
	SEER			16.6	16.5	16.8	14.3
	EER			11.5	12.5	12.5	10.0
Efficiency	HSPF			11	9.5	10.4	10.8
	COP			3.5	3.4	3.52	3.7
	ENERGY STAR® Certified			No	Yes	Yes	No
	Air Flow Rate - Cooling	Dry	CFM	512-636-742	618-742-883	847-1024-1201	1042-1254-1483
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	461-572-667	556–668–795	762–922–1081	1002-1214-1443
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	512-636-742	618–742–883	847–1024–1201	1042–1254–1483
	Sound Pressure Level	Cooling	dB(A)	30–33–37	30–34–39	33–38–42	36–40–44
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	30–33–37	30–34–39	33–38–42	36-40-44
Indoor Unit	External Static Pressure	In. W.G.		0.14-0.2-0.28-0.4-0.6	0.14-0.2-0.28-0.4-0.6	0.14-0.2-0.28-0.4-0.6	0.14-0.2-0.28-0.4-0.6
	Condensate Lift Mechanism	Max Distance	In. [mm]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]
	Dimensions	Н	In. [mm]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]
		W	In. [mm]	43-5/16 [1100]	43-5/16 [1100]	55-1/8 [1400]	55-1/8 [1400]
		D	In. [mm]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]
	Weight	lbs [kg]		69 [31]	69 [31]	86 [39]	91 [41]
	MCA	Α		19.0	28.0	28.0	37.0
	MOCP	Α		26	40	40	44
		Н	In. [mm]	37-1/8 [943]	53-1/8 [1375]	53-1/8 [1375]	52-11/16 [1338]
	Dimensions	W	In. [mm]	37-13/32 [950]	37-3/8 [950]	37-3/8 [950]	41-3/8 [1051]
Outdoor Unit		D	In. [mm]	13 [+1-3/16] [330 [+30]]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		85 [188]	265 [120]	265 [120]	287 [130]
	Air Flow Rate (Cooling/Heating)	CFM		1940/1940	3530/3530	3530/3530	3320/3320
	Sound Pressure Level	Cooling	dB(A)	52	52	52	49
		Heating	dB(A)	53	53	53	51
		Gas (O.D.)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
	Max. Length	ft [m]		165 [50]	245 [75]	245 [75]	245 [75]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]
Electrical	Outdoor-Indoor ⁵	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
	Recommended Breaker Size	Α		25	30	30	40
Refrigerant Type		1		R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		0.0 to 115.0 [-18.0 to 46.0]			
Operation Range	Heating	°F DB [°C DB]		-13.0 to 70.0 [-25.0 to 21.0]			


AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) ⁴Heating at 5°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB

70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

Conditions °Indoor units receive power from outdoor units through field-supplied interconnected wiring.
°Wind baffles required to operate below 23°F DB in cooling mode. PUZ with wind baffle: 0° F - 115° F.

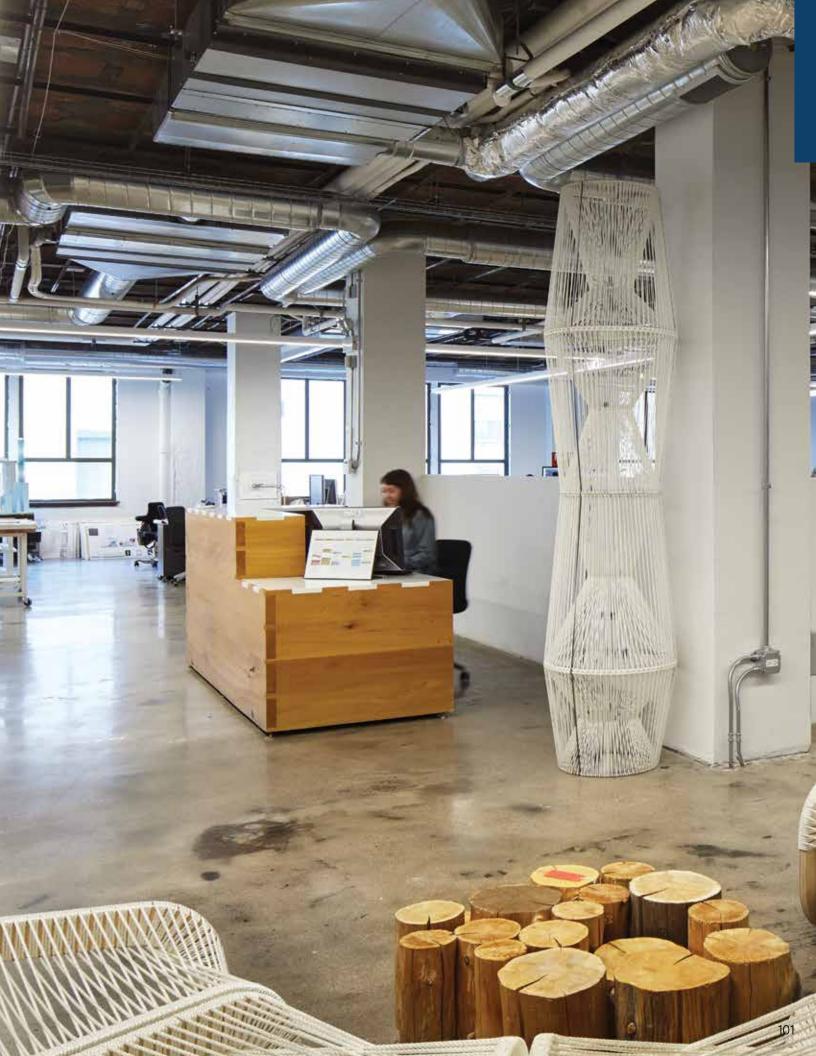

PCA Model

A stylish new indoor unit design and airflow settings for both high and low ceiling interiors expand installation possibilities. Together with exceptional energy-saving performance, these units are the solution to diversified air conditioning needs.




Stylish Indoor Unit Design


A stylish square-like design is adopted for the indoor units of all models. As a result, the units blend in better with the ceiling.



High Energy Efficiency


SEER/HSPF has been greatly improved, realizing industry-leading energy-saving features.

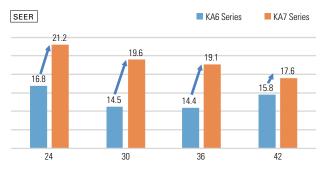

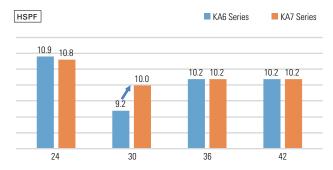

Optional Drain Pump for All Models

The pumping height of the optional drain pump has been increased from 15-3/4" to 23-5/8", expanding flexibility in choosing unit location during installation work.

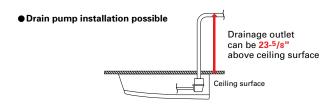

Equipped with Automatic Air-speed Adjustment

In addition to the conventional 4-speed setting, units are now equipped with an automatic air-speed adjustment mode. This setting automatically adjusts the air-speed to conditions that match the room environment. At the start of heating/cooling operation, the airflow is set to high-speed to quickly heat/cool the room. When the room temperature reaches the desired setting, the airflow speed is decreased automatically for stable comfortable heating/cooling operation.



Equipped with High/Low-ceiling Modes

Units are equipped with high- and low-ceiling operation modes that make it possible to switch the airflow volume to match room height. The ability to choose the optimum airflow volume ensures even temperature distribution throughout the room.


Capacity (kBTU/H)	High ceiling (ft)	Standard ceiling (ft)	Low ceiling (ft)
24	11.5	8.9	8.2
30	11.5	8.9	8.2
36	13.8	9.8	8.5
42	13.8	9.8	8.5

i-see SensorTM (Optional)


The i-see Sensor, an infrared sensor that detects floor temperature to improve the unevenness in room temperature. When cooling and heating, it also saves energy while keeping a comfortable effective temperature.

Inlet temperature sensor 160° i-see Sensor's detecting area

PCA Model

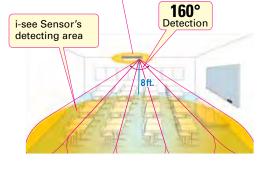

Inverter PAM Power Receiver

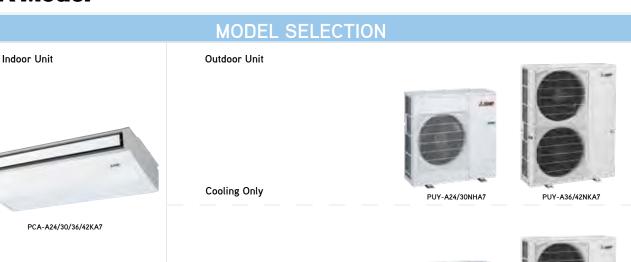









*optional AAR-40MAAU



*optional PAC-YT53CRAU-J



*optional PAR-CT01MAU-SB



*optional

PCA Model COOLING ONLY









Wi-Fi i)) COMPO (Wiring Reuse Drain Lift Up Down Connection Flore Recall Lift Up Down Connection Recall Disgraph Connection Recall Disgraph Connection Con

















Indoor Unit				PCA-A24KA7	PCA-A30KA7	PCA-A36KA7	PCA-A42KA7
Outdoor Unit				PUY-A24NHA7(-BS)	PUY-A30NHA7(-BS)	PUY-A36NKA7(-BS)	PUY-A42NKA7(-BS)
	Capacity	Rated ¹	BTU/H	24,000	30,000	36,000	42,000
	Capacity Range	Min-Max	BTU/H	10,000–24,000	9,000–30,000	16,000–36,000	16,000–42,000
Cooling	Power Input	Rated ¹	w	1,960	3,190	3,270	4,110
	Moisture Removal	Pints/h		5.8	8.3	8.7	11.7
	Sensible Heat Factor	1		0.730	0.690	0.730	0.690
	Capacity at 47°F	Rated	BTU/H	_	_	_	_
	Capacity Range	Min-Max	BTU/H	_	_	_	_
	Power Input at 47°F	Rated	W	_	-	-	_
Heating		Rated	BTU/H	_	-	-	_
	Capacity at 17°F	Max	BTU/H	_	_	_	_
	Capacity at 5°F	Max	BTU/H	-	-	-	-
	SEER			21.2	19.6	19.1	17.6
	EER			12.2	9.4	11.0	10.2
Efficiency	HSPF			-	-	-	-
	COP			_	-	-	_
	ENERGY STAR® Certified			No	No	No	No
	Air Flow Rate - Cooling	Dry	CFM	530-565-600-670	565-600-635-705	775–850–920–990	810-885-955-1025
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	495-530-565-635	530-565-600-670	705–775–850–920	740-810-885-955
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	530-565-600-670	565-600-635-705	775–850–920–990	810-885-955-1025
	Sound Pressure Level	Cooling	dB(A)	33–35–37–40	35–37–39–41	37–39–41–43	39-41-43-45
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	33–35–37–40	35–37–39–41	37–39–41–43	39-41-43-45
Indoor Unit	External Static Pressure In. W.C		In. W.G.	_	-	_	_
	Condensate Lift Mechanism	Max Distance	In. [mm]		_	_	_
	Dimensions	Н	In. [mm]	9-1/16 [230]	9-1/16 [230]	9-1/16 [230]	9-1/16 [230]
		W	In. [mm]	50-3/8 [1280]	50-3/8 [1280]	63 [1600]	63 [1600]
		D	In. [mm]	26-3/4 [680]	26-3/4 [680]	26-3/4 [680]	26-3/4 [680]
	Weight	lbs [kg]		71 [32]	71 [32]	79 [36]	86 [39]
	MCA	Α		19.0	19.0	25.0	25.0
	MOCP	Α		26	26	31	31
		Н	In. [mm]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	In. [mm]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		151 [68]	151 [68]	211 [96]	211 [96]
	Air Flow Rate (Cooling/Heating)	CFM		1940/—	1940/—	3880/—	3880/—
	Sound Pressure Level	Cooling	dB(A)	47	47	52	52
		Heating	dB(A)	_	_	_	_
		Gas (O.D.)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	1-1/32 [26]	1-1/32 [26]	1-1/32 [26]	1-1/32 [26]
	Max. Length	ft [m]		225 [68]	225 [68]	225 [68]	225 [68]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]
Electrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
	Recommended Breaker Size	Α		25	25	30	30
Refrigerant Type				R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling 6	°F DB [°C DB]		-40.0 to 115.0 [-40.0 to 46.0]			
peration Range H	Heating	°F DB [°C DB]		_	_	_	_

Notes:

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB ۰F

and a face descriptions of speedy

Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Wind baffles required to operate below 23°F DB in cooling mode. PUY with wind baffle: -40°F - 115°F. Refer to wind baffle documentation for further information.

SEACOAST PROTECTION

External Outer Panel: Phosphate coating + Acrylic-Enamel coating

Fan Motor Support: Epoxy resin coating (at edge face)
Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)
"Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.



































ACO
re Ction Set Failure Recall
PCA-A30KA7
PUZ-A30NHA7(-BS)
30,000
9.000-30.000

Indoor Unit				PCA-A24KA7	PCA-A30KA7	PCA-A36KA7	PCA-A42KA7
Outdoor Unit				PUZ-A24NHA7(-BS)	PUZ-A30NHA7(-BS)	PUZ-A36NKA7(-BS)	PUZ-A42NKA7(-BS)
	Capacity Rated ¹ BTU/H			24,000	30,000	36,000	42,000
	Capacity Range	Min-Max	BTU/H	10,000–24,000	9,000–30,000	16,000–36,000	16,000–42,000
Cooling	Power Input	Rated ¹	w	1,960	3,190	3,270	4,110
	Moisture Removal	Pints/h		5.8	8.3	8.7	11.7
	Sensible Heat Factor			0.730	0.690	0.730	0.690
	Capacity at 47°F	Rated ²	BTU/H	26,000	32,000	38,000	45,000
	Capacity Range	Min-Max	BTU/H	8,800–28,000	8,600–34,000	17,900–40,000	18,100-48,000
	Power Input at 47°F	Rated ²	w	1,800	2,520	2,410	3,480
Heating	Oit 470F	Rated ³	BTU/H	15,400	18,800	21,000	31,800
	Capacity at 17°F	Max	BTU/H	17,900	21,600	24,400	35,000
	Capacity at 5°F	Max ⁴	BTU/H	_	-	-	_
	SEER			21.2	19.6	19.1	17.6
	EER			12.2	9.4	11.0	10.2
Efficiency	HSPF			10.8	10	10.2	10.2
	COP			4.23	3.72	4.62	3.78
	ENERGY STAR® Certified			No	No	No	No
	Air Flow Rate - Cooling	Dry	CFM	530-565-600-670	565-600-635-705	775–850–920–990	810-885-955-1025
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	495-530-565-635	530-565-600-670	705–775–850–920	740-810-885-955
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	530-565-600-670	565-600-635-705	775–850–920–990	810-885-955-1025
	Sound Pressure Level	Cooling	dB(A)	33–35–37–40	35–37–39–41	37–39–41–43	39-41-43-45
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	33-35-37-40	35–37–39–41	37–39–41–43	39-41-43-45
Indoor Unit	External Static Pressure	In. W.G.		_	_	-	_
	Condensate Lift Mechanism	Max Distance In. [mm]		-	_	-	_
	Dimensions	Н	In. [mm]	9-1/16 [230]	9-1/16 [230]	9-1/16 [230]	9-1/16 [230]
		w	In. [mm]	50-3/8 [1280]	50-3/8 [1280]	63 [1600]	63 [1600]
		D	In. [mm]	26-3/4 [680]	26-3/4 [680]	26-3/4 [680]	26-3/4 [680]
	Weight	lbs [kg]		71 [32]	71 [32]	79 [36]	86 [39]
	MCA	Α		19.0	19.0	25.0	25.0
	MOCP	Α		26	26	31	31
		Н	In. [mm]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	In. [mm]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		153 [69]	153 [69]	214 [97]	214 [97]
	Air Flow Rate (Cooling/Heating)	CFM		1940/1940	1940/1940	3880/3880	3880/3880
	Sound Pressure Level	Cooling	dB(A)	47	47	52	52
	Sound Pressure Level	Heating	dB(A)	48	48	53	53
		Gas (O.D.)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	1-1/32 [26]	1-1/32 [26]	1-1/32 [26]	1-1/32 [26]
	Max. Length	ft [m]		165 [50]	165 [50]	165 [50]	165 [50]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]
Clastrias	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical	Recommended Breaker Size	Α		25	25	30	30
Refrigerant Type				R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		0.0 to 115.0 [-18.0 to 46.0]			
Operation Range	Heating	°F DB [°C DB]		-4.0 to 70.0 [-20.0 to 21.0]			

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor)
²Heating at 47°F (Indoor // Outdoor)
³Heating at 17°F (Indoor // Outdoor)
⁴Heating at 5°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB

70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

Conditions

Indoor units receive power from outdoor units through field-supplied interconnected wiring.
Wind baffles required to operate below 23°F DB in cooling mode. PUZ with wind baffle: 0° F - 115° F. Refer to wind baffle documentation for further information. SEACOAST PROTECTION

- External Outer Panel: Phosphate coating + Acrylic-Enamel coating
- Fan Motor Support: Epoxy resin coating (at edge face)
 Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)
- "Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

PCA Model HYPER-HEATING









Wi-Fi i) COMPO Wiring Reuse Drain Lift Up Down Connection Flare Connection Facult Facult















_	
	DATE OF THE PARTY OF
	I WENTER
	compositor
	CONTROCTION

Indoor Unit				PCA-A24KA7	PCA-A30KA7	PCA-A36KA7	PCA-A42KA7
Outdoor Unit				PUZ-HA24NHA	PUZ-HA30NHA5	PUZ-HA36NHA5	PUZ-HA42NKA
	Capacity	Rated ¹	BTU/H	24,000	30,000	34,000	42,000
	Capacity Range	Min-Max	BTU/H	10,000–24,000	18,000	18,000	19,000
Cooling	Power Input	Rated ¹	w	1,840	2,480	2,810	4,200
	Moisture Removal	Pints/h		5.6	8.3	8.2	11.7
	Sensible Heat Factor			0.730	0.690	0.730	0.690
	Capacity at 47°F	Rated ²	BTU/H	26,000	32,000	38,000	48,000
	Capacity Range	Min-Max	BTU/H	10,000–28,000	18,000–35,000	18,000–40,000	21,000–54,000
	Power Input at 47°F	Rated ²	w	2,050	2,990	3,270	4,150
Heating	0 '1 14705	Rated ³	BTU/H	17,700	19,000	27,000	44,000
	Capacity at 17°F	Max	BTU/H	26,000	32,000	38,000	48,000
	Capacity at 5°F	Max ⁴	BTU/H	26,000	32,000	38,000	48,000
	SEER			18.5	16.1	16.6	14.5
	EER			12.5	12.1	12.1	10.0
Efficiency	HSPF			10.8	9.3	10.3	10.4
	COP			3.5	3.14	3.4	3.38
	ENERGY STAR® Certified			Yes	No	No	No
	Air Flow Rate - Cooling	Dry	CFM	530-565-600-670	565-600-635-705	775–850–920–990	810-885-955-1025
	(Quiet-Lo-Med-Hi-SHi)	Wet	CFM	495-530-565-635	530-565-600-670	705–775–850–920	740-810-885-955
	Air Flow Rate - Heating (Quiet-Lo-Med-Hi-SHi)	Dry	CFM	530-565-600-670	565-600-635-705	775–850–920–990	810-885-955-1025
	Sound Pressure Level	Cooling	dB(A)	33–35–37–40	35–37–39–41	37–39–41–43	39-41-43-45
	(Quiet-Lo-Med-Hi-SHi)	Heating	dB(A)	33–35–37–40	35–37–39–41	37–39–41–43	39-41-43-45
ndoor Unit	external Static Pressure In. W.G.		In. W.G.	_	_	_	_
	Condensate Lift Mechanism	Max Distance	In. [mm]	_	_	_	_
	Dimensions	Н	In. [mm]	9-1/16 [230]	9-1/16 [230]	9-1/16 [230]	9-1/16 [230]
		W	In. [mm]	50-3/8 [1280]	50-3/8 [1280]	63 [1600]	63 [1600]
		D	In. [mm]	26-3/4 [680]	26-3/4 [680]	26-3/4 [680]	26-3/4 [680]
	Weight	lbs [kg]		71 [32]	71 [32]	79 [36]	86 [39]
	MCA	Α		19.0	28.0	28.0	37.0
	MOCP	Α		26	40	40	44
		Н	In. [mm]	37-1/8 [943]	53-1/8 [1375]	53-1/8 [1375]	52-11/16 [1338]
	Dimensions	W	In. [mm]	37-13/32 [950]	37-3/8 [950]	37-3/8 [950]	41-3/8 [1051]
Outdoor Unit		D	In. [mm]	13 [+1-3/16] [330 [+30]]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		85 [188]	265 [120]	265 [120]	287 [130]
	Air Flow Rate (Cooling/Heating)	CFM		1940/1940	3530/3530	3530/3530	3320/3320
	Sound Pressure Level	Cooling	dB(A)	52	52	52	49
	Sound i lessure Level	Heating	dB(A)	53	53	53	51
		Gas (O.D.)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	1-1/32 [26]	1-1/32 [26]	1-1/32 [26]	1-1/32 [26]
	Max. Length	ft [m]		165 [50]	245 [75]	245 [75]	245 [75]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]
Electrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
	Recommended Breaker Size	Α		25	30	30	40
Refrigerant Type				R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		0.0 to 115.0 [-18.0 to 46.0]			
Operation Range	Heating	°F DB [°C DB]		-13.0 to 70.0 [-25.0 to 21.0]			

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed) Conditions

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) ⁴Heating at 5°F (Indoor // Outdoor)

°F °F °F

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

[°]Indoor units receive power from outdoor units through field-supplied interconnected wiring.
°Wind baffles required to operate below 23°F DB in cooling mode. PUZ with wind baffle: 0° F - 115° F.



MULTIZONE Series







SELECTION

Choose from six types of indoor units and thirteen outdoor units that can run up to eight indoor units each.





STEP 3 CHECK SYSTEM COMPATIBILITY

Possible combinations depends on the outdoor unit chosen. Please check the following points.

Check Indoor Units

Refer to the Indoor Unit Compatibility Table to check if the indoor units selected can be used with the outdoor unit selected. (Indoor units not listed in the table cannot be used.)

Check Indoor Unit Capacity Combination Refer to the Combination Table to check if the capacity combination of the indoor unit selected is connectible. (Combinations not listed cannot be connected.)

If the desired combination cannot be found, please change either the indoor or outdoor unit to match one of the combinations shown in the tables.

MX Model

Advancements in the MX Models include efficiency and flexibility in system expansion capabilities. The best solution when requiring multi-system air conditioning needs.

Outdoor Unit









3-port 4-port

NAXMMX24A132**

NAXMMX30A132**

NAXMMX36A142**



5-port NAXMMX42A152**




8-port

NAXMMX48A182**
NAXMMX60A182**
8 Port Branch Box required

EXAMPLE SYSTEM





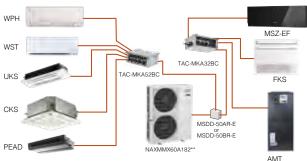

Refer to the multi-zone compatibility table on page 9.


Handle Up to 8 Rooms with a Single Outdoor Unit

The MX Model offers a seven-system line-up to choose from, ranging between 20,000 and 60,000 BTU/H. All of them are compatible with specific Nv- and P-Series indoor units. A single outdoor unit can handle a wide range of building layouts.

Optional Drain for All Models

With MX Model one outdoor unit can cool and heat up to eight rooms. They can be installed neatly in sites with limited space such as condominium balconies.

*Please note that cooling and heating modes cannot be run simultaneously in different rooms.

















r	E

Туре			Up to 2 indoor units		to 3 r units	Up to 4 indoor units	Up to 5 indoor units		to 8 r units			
Outdoor	Unit			NAXMMX20A122A*	NAXMMX24A132A*	NAXMMX30A132A*	NAXMMX36A142A*	NAXMMX42A152A*	NAXMMX48A182B*	NAXMMX60A182B*		
Branch Box Required			No	No	No	No	No	Yes	Yes			
	Source			R410A	R410A	R410A	R410A	R410A	R410A	R410A		
Power Supply	Outdoor (Pha	ase, Hz, V)		1-phase, 60Hz, 208/230V	1-phase, 60Hz, 208/230V	1-phase, 60Hz, 208/230V	1-phase, 60Hz, 208/230V	1-phase, 60Hz, 208/230V	1-phase, 60Hz, 208/230V	1-phase, 60Hz, 208/230V		
	Capacity	Rated *1	BTU/H	18,000	22,000	28,400	35,400	40,500	48,000	60,000		
Cooling	SEER						D-ft 140					
	EER						Refer to page 148					
		Rated *1	BTU/H	22,000	25,000	28,600	36,000	45,000	54,000	66,000		
	Capacity	Max at 17F *2	BTU/H	12,500	19,600	21,000	26,600	30,500	36,600	65,000		
Heating		Max at 5F *3	BTU/H	11,100	18,200	18,200	24,000	26,000	32,400	57,000		
	HSPF				Refer to page 148							
	MCA A		Α	17.2	22.1	22.1	22.1	32.5	35.0	46.0		
	Recommended Fuse/ Breaker Size		Α	20	25	25	25	40	40	50		
	Dimensions	W	In. [mm]	33-1/16 [840]	37-13/32 [950]	37-13/32 [950]	37-13/32 [950]	37-13/32 [950]	41-11/32 [1,050]	41-11/32 [1,050]		
		D	In. [mm]	13 [330]	13 [330]	13 [330]	13 [330]	13 [330]	13+1 [330+25]	13+1 [330+25]		
Outdoor Unit		Н	In. [mm]	27-15/16 [710]	31-11/32 [796]	31-11/32 [796]	31-11/32 [796]	41-17/64 [1,048]	52-11/16 [1,338]	52-11/16 [1,338]		
	Weight Ibs [kg]		126 [57]	137 [62]	137 [62]	139 [63]	189 [86]	271 [123]	302 [137]			
	Air volume (0	Cooling/Heating)	CFM	1,342/1,458	2,287/2,382	2,287/2,382	2,287/2,382	2,118/2,542	3,885	4,879		
	Sound Level	Cooling	dB [A]	50	51	52	54	56	51	58		
	Souria Level	Heating	dB [A]	54	55	56	56	58	54	59		
	Diameter	Gas	In. [mm]	3/8 [9.52]	A: 1/2 [12.7] B,C: 3/8 [9.52]	A: 1/2 [12.7] B,C: 3/8 [9.52]	A: 1/2 [12.7] B,C,D: 3/8 [9.52]	A: 1/2 [12.7] B,C,D,E: 3/8 [9.52]	5/8 [15.88]	3/4 [19.05]		
Piping		Liquid	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]		
	Max. Length		ft [m]	164 [50]	230 [70]	230 [70]	230 [70]	262 [80]	492 [150]	492 [150]		
	Height		ft [m]	49 [15]	49 [15]	49 [15]	49 [15]	49 [15]	164 [50]	164 [50]		
Guarante	eed Operation	Cooling	F [C]	14 ~ 115°FDB [-10 ~ 46°CDB]	14 ~ 115°FDB [-10 ~ 46°CDB]	14 ~ 115°FDB [-10 ~ 46°CDB]	14 ~ 115°FDB [-10 ~ 46°CDB]	14 ~ 115°FDB [-10 ~ 46°CDB]	23 ~ 115°FDB [-5 ~ 46°CDB] *5	23 ~ 115°FDB [-5 ~ 46°CDB] *5		
Range	•	Heating	F [C]	5 ~ 75°FDB [-15 ~ 24°CDB]	5 ~ 75°FDB [-15 ~ 24°CDB]	5 ~ 75°FDB [-15 ~ 24°CDB]	5 ~ 75°FDB [-15 ~ 24°CDB]	5 ~ 75°FDB [-15 ~ 24°CDB]	-4 ~ 70°FDB [-20 ~ 21°CDB]	-4 ~ 70°FDB [-20 ~ 21°CDB]		

Туре				Branch Box	
Model Name				TAC-MKA32BC	TAC-MKA52BC
Connectible N	Number of Indoor l	Jnits		Maximum 3	Maximum 5
Power Supply				1-phase, 60Hz, 208/230V	1-phase, 60Hz, 208/230V
Input			kW	0.003	0.003
Running Current A			Α	0.05	0.05
W			In. [mm]	17-23/32 [450]	17-23/32 [450]
Dimensions		D	In. [mm]	11-1/32 [280]	11-1/32 [280]
		Н	In. [mm]	6-11/16 [170]	6-11/16 [170]
Weight			lbs [kg]	15 [6.7]	16 [7.4]
Piping	Branch (indoor side)*	Gas	In. [mm]	3/8 [9.52] × 3	3/8 [9.52] × 4 1/2 [12.7] × 1
Connection	(indoor side)	Liquid	In. [mm]	1/4 [6.35] × 3	1/4 [6.35] × 5
(Flare)	Main	Gas	In. [mm]	5/8 [15.88]	5/8 [15.88]
	(outdoor side)*	Liquid	In. [mm]	3/8 [9.52]	3/8 [9.52]

^{*}The piping connection size differs according to the type and capacity of indoor units. Match the piping connection size for indoor and branch box. If the piping connection size of branch box does not match the piping connection size of indoor units, use optional different-diameter (deformed) joints to the branch box side. (Connect deformed joint directly to the branch box side.)

NOTE: Test conditions are based on AHRI 210/240.

*1 Rating Conditions (Cooling) - Indoor: 80° FDB, 67° FWB, Outdoor: 95° FDB, (75° FWB) (Heating) - Indoor: 70° FDB, 60° FWB, Outdoor: 47° FDB, 43° FWB

*2 Rating Conditions (Heating) - Indoor: 70° FDB, 60° FWB, Outdoor: 17° FDB, 15° FWB

*3 Rating Conditions (Heating) - Indoor: 70° FDB, 60° FWB, Outdoor: 5° FDB, 5° FWB

*5 °F DB - 115° FDB when optional wind baffles are installed

MPH Model




New Pro-Heat MX allows you to create an oasis of comfort throughout your home and office, in the rooms you use most, any time of the year.



Standard rated heating capacity is maintained even when the outside-air temperature drops to 5° F.

Maintains high capacity output even when outside-air temperature is low.

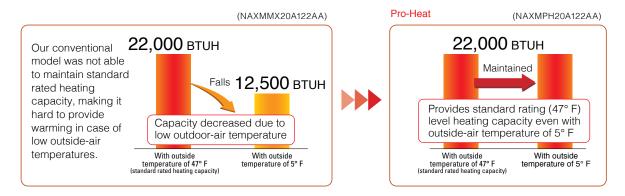

Can operate at outside-air temperature of -13° F

- 1. Incorporated key parts resistant to cold of up to -13° F after rigorous selection.
- 2. Printed circuit board is coated on both sides to protect it in harsh environments.

Base pan heater built-in

Prevents capacity loss and operation from stopping due to drain water freezing.

Drain water freezes after operation in the harsh cold

Pro-Heat

Does not freeze

Without base heater

With base heater

Continuous heating for long periods

Wasteful defrosting operation suppressed to enable more comfortable long-term continuous heating. Extremely cold outside Pro-Heat

During defrosting MPH Model operation, the unit stops and is cold... MMX Model Heating operation

Гуре				Up to 2 indoor units		to 3 or units	Up to 4 indoor units	Up to 5 indoor units	Up to 8 indoor units	
Outdoor Unit			NAXMPH20A122A*	NAXMPH24A132A*	NAXMPH30A132A*	NAXMPH36A142B*	NAXMPH42A152B*	NAXMMX48A182B*		
Branch B	ox Required			No	No	No	Yes	Yes	Yes	
	Source			R410A	R410A	R410A	R410A	R410A	R410A	
ower upply	Outdoor (Pha	ise, Hz, V)		1-phase, 60Hz, 208/230V	1-phase, 60Hz, 208/230V	1-phase, 60Hz, 208/230V	1-phase, 60Hz, 208/230V	1-phase, 60Hz, 208/230V	1-phase, 60Hz, 208/230V	
	Recommende	ed Breaker Size		40	40	40	50			
	Capacity	Rated *1	BTU/H	18,000	22,000	28,400	36,000	42,000	48,000	
ooling	SEER						tefer to page 148			
	EER					I.	leiei to page 146			
	Capacity	Rated *1	BTU/H	22,000	25,000	28,600	45,000	48,000	54,000	
eating		Max at 17F *2	BTU/H	22,000	25,000	28,600	45,000	48,000	54,000	
licating		Max at 5F *3	BTU/H	22,000	25,000	28,600	45,000	48,000	54,000	
	HSPF			Refer to page 148						
	MCA		Α	29.5	30.5	30.5	42	42	42	
	Recommended breaker/ fuse size		Α	40	40	50	45	45	45	
	luse size	W	In. [mm]	37-13/32 [950]	37-13/32 [950]	41-11/32 [1,050]	41-11/32 [1,050]	41-11/32 [1,050]	41-11/32 [1,050]	
	Dimensions	D	In. [mm]	13 [330]	13 [330]	13 [330]	13+1 [330+25]	13+1 [330+25]	13+1 [330+25]	
utdoor nit		Н	In. [mm]	41-17/64 [1,048]	41-17/64 [1,048]	41-17/64 [1,048]	52-11/16 [1,338]	52-11/16 [1,338]	52-11/16 [1,338]	
	Weight		lbs [kg]	187 [85]	189 [86]	189 [86]	278 [126]	278 [126]	278 [126]	
	Air volume (C	cooling/Heating)	CFM	2,118/2,542	2,188/2,542	2,224/2,542	3,885	3,885	3,885	
	Sound Level	Cooling	dB [A]	54	54	54	49	50	51	
	Souria Level	Heating	dB [A]	58	58	58	53	54	54	
	Diameter	Gas	In. [mm]	3/8 [9.52]	A: 1/2 [12.7] B,C: 3/8 [9.52]	A: 1/2 [12.7] B,C: 3/8 [9.52]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	
ping		Liquid	In. [mm]	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	
	Max. Length		ft [m]	164 [50]	230 [70]	230 [70]	492 [150]	492 [150]	492 [150]	
	Height		ft [m]	49 [15]	49 [15]	49 [15]	164 [50]	164 [50]	164 [50]	
uarante	ed Operation	Cooling	F [C]	14 ~ 115°FDB [-10 ~ 46°CDB]	14 ~ 115°FDB [-10 ~ 46°CDB]	14 ~ 115°FDB [-10 ~ 46°CDB]	23 ~ 115°FDB [-5 ~ 46°CDB] *5	23 ~ 115°FDB [-5 ~ 46°CDB] *5	23 ~ 115°FDB [-5 ~ 46°CDB] *5	
ange	•	Heating	F [C]	-13 ~ 75°FDB [-25 ~ 24°CDB]	-13 ~ 75°FDB [-25 ~ 24°CDB]	-13 ~ 75°FDB [-25 ~ 24°CDB]	-13 ~ 70°FDB [-25 ~ 21°CDB]	-13 ~ 70°FDB [-25 ~ 21°CDB]	-13 ~ 70°FDB [-25 ~ 21°CDB]	

NOTE: Test conditions are based on AHRI 210/240.

*1 Rating Conditions (Cooling) - Indoor: 80° FDB, 67° FWB, Outdoor: 95° FDB, (75° FWB)
(Heating) - Indoor: 70° FDB, 60° FWB, Outdoor: 47° FDB, 43° FWB

*2 Rating Conditions (Heating) - Indoor: 70° FDB, 60° FWB, Outdoor: 47° FDB, 15° FWB

*3 Rating Conditions (Heating) - Indoor: 70° FDB, 60° FWB, Outdoor: 5° FDB, 5° FWB

*5 °F DB - 115°F DB when optional wind baffles are installed

Indoor Unit Compatibility Table MMX Model *1

Possible combinations of outdoor units and indoor units are shown below.

ndoor Unit		Outdoor Unit	NAXMMX20A122A*	NAXMMX24A132A*	NAXMMX30A132A*	NAXMMX36A142A*	NAXMMX42A152A*	NAXMMX48A182A*	NAXMMX60A182
		NAXWPH06A112A*	•	•	•	•	•	•	•
		NAXWPH09A112A*	•	•	•	•	•	•	•
		NAXWPH12A112A*	•	•	•	•	•	•	•
		NAXWPH15A112A*	•	•	•	•	•	•	•
		NAXWPH18A112A*		•	•	•	•	•	•
		NAXWST06A112A*	•	•	•	•	•	•	•
		NAXWST09A112A*	•	•	•	•	•	•	•
	Wall Mounted	NAXWST12A112A*	•	•	•	•	•	•	•
		NAXWST15A112A*	•	•	•	•	•	•	•
		NAXWST18A112A*		•	•	•	•	•	•
		NAXWST24A112A*			•	•	•	•	•
		MSZ-EF09NAW(S)(B)	•	•	•	•	•	•	•
		MSZ-EF12NAW(S)(B)	•	•	•	•	•	•	•
		MSZ-EF15NAW(S)(B)	•	•	•	•	•	•	•
		MSZ-EF18NAW(S)(B)		•	•	•	•	•	•
		NAXFKS09A112A*	•	•	•	•	•	•	•
	Floor	NAXFKS12A112A*	•	•	•	•	•	•	•
lv-Series	Standing	NAXFKS15A112A*	•	•	•	•	•	•	•
		NAXFKS18A112A*		•	•	•	•	•	•
	EZ FIT™	NAXUKS09A112A*	•	•	•	•	•	•	•
	Recessed Ceiling	NAXUKS12A112A*	•	•	•	•	•	•	•
	Cassette	NAXUKS18A112A*	•	•	•	•	•	•	•
	Multi-position Air Handler	NAXAMT12A112A*	•*2	•*2	•*2	•*2	•*2	•*3, 4	•*3, 4
		NAXAMT18A112A*	_	•*2	•*2	•*2	•*2	•*3, 4	•*3, 4
		NAXAMT24A112A*		_	•*2	•*2	•*2	•*3, 4	•*3, 4
		NAXAMT30A112A*			_	_		•*3, 4	•*3, 4
		NAXAMT36A112A*						•*3, 4	•*3, 4
		NAXCKS09A112A*	•	•	•	•	•	•	•
	4-way	NAXCKS12A112A*	•	•	•	•	•	•	•
	Cassette	NAXCKS15A112A*		•	•	•	•	•	•
		NAXDKS09A112A*	•	•	•	•	•	•*6	•*7
		NAXDKS12A112A*	•	•	•	•	•	•*6	•*7
	Horizontal-ducted	NAXDKS15A112A*	•	•	•	•	•	•*6	•*7
		NAXDKS18A112A*		•	•	•	•	•*6	•*7
		PLA-A12EA7						•*5	•*5
		PLA-A18EA7		•	•	•	•	•*5	•*5
	4 9999	PLA-A24EA7						•*5	•*5
	4-way Cassette	PLA-A30EA7						•*5	•*5
		PLA-A36EA7						•*5	•*5
		PLA-A42EA7						3	3
		PCA-A24KA7			•	•	•		
	Cailing	PCA-A30KA7							
-Series	Ceiling Suspended	PCA-A36KA7							
		PCA-A42KA7							
		PEAD-A12AA7	•*3	•*3	•*3	•*3	•*3	•*6	•*7
		PEAD-A18AA7	- 3	•	•*3	•*3	•*3	•*6	•*7
		PEAD-A24AA7			•	•	•*3	•*6	•*7
	Horizontal-ducted	PEAD-A30AA7					- 3	•*6	•*7
		PEAD-A36AA7						_	
		PEAD-A42AA7						•*6	•*7

Information is current as of this printing. Minimum installed capacity cannot be less than 12,000 BTU/H. A minimum of two indoor units must be connected to all MX outdoor units.

^{*2} Only one AMT Model can be connected.
*3 Maximum of two units can be connected unless the SPTB1 is utilized to power the indoor unit.

^{*4} Single unit can be connected.
*5 When the system includes even 1 unit of PLA-A-EA7, the number of the maximum connectable indoor units is decreased as follows: 3 for NAXMPH36A142**, 4 for NAXMPH42A152**, and 6 for NAXMPH48A182** and NAXMMX60A182**.

^{*6} Maximum of 3 horizontal ducted indoor units (PEAD or DKS) can be connected.

*7 Maximum of 2 horizontal ducted indoor units (PEAD or DKS) can be connected.

For more information, please refer to the service manual, application 1029 and the full compatibility chart on AmericanStandard.MyLinkDrive.com.

MPH Model *1



Possible combinations of outdoor units and indoor units are shown below.

door Unit		Outdoor Unit	NAXMPH20A122A*	NAXMPH24A132A*	NAXMPH30A132A*	NAXMPH36A142A*	NAXMPH42A152B*	NAXMMX48A182
		NAXWPH06A112A*	•	•	•	•	•	•
		NAXWPH09A112A*	•	•	•	•	•	•
		NAXWPH12A112A*	•	•	•	•	•	•
		NAXWPH15A112A*	•	•	•	•	•	•
		NAXWPH18A112A*		•	•	•	•	•
		NAXWST06A112A*	•	•	•	•	•	•
		NAXWST09A112A*	•	•	•	•	•	•
	Wall Mounted	NAXWST12A112A*	•	•	•	•	•	•
	ou.i.ou	NAXWST15A112A*	•	•	•	•	•	•
		NAXWST18A112A*		•	•	•	•	•
		NAXWST24A112A*			•	•	•	•
		MSZ-EF09NAW(S)(B)	•	•	•	•	•	•
		MSZ-EF12NAW(S)(B)	•	•	•	•	•	•
		MSZ-EF15NAW(S)(B)	•	•	•	•	•	•
		MSZ-EF18NAW(S)(B)		•	•	•	•	•
		NAXFKS09A112A*	•	•	•	•	•	•
	Floor	NAXFKS12A112A*	•	•	•	•	•	•
Series	Standing	NAXFKS15A112A*	•	•	•	•	•	•
		NAXFKS18A112A*		•	•	•	•	•
	EZ FIT™	NAXUKS09A112A*	•	•	•	•	•	•
	Recessed	NAXUKS12A112A*	•	•	•	•	•	•
	Ceiling Cassette	NAXUKS18A112A*	•	•	•	•	•	•
		NAXAMT12A112A*	•*2	•*2	•*2	•*3, 4	•*3, 4	•*3, 4
		NAXAMT18A112A*		•*2	•*2	•*3, 4	•*3, 4	•*3, 4
	Multi-position Air Handler	NAXAMT24A112A*			•*2	•*3, 4	•*3, 4	•*3, 4
		NAXAMT30A112A*			2	•*3, 4	•*3, 4	•*3, 4
		NAXAMT36A112A*				•*3, 4	•*3, 4	•*3, 4
	4-way	NAXCKS09A112A*	•	•	•	•	5, 4	0, 4
		NAXCKS12A112A*	•	•	•	•	•	
	Cassette	NAXCKS15A112A*	-	•	•	•	•	•
		NAXDKS09A112A*	•	•	•	•*6	•*6	•*6
		NAXDKS12A112A*	•	•	•		•*6	-
	Horizontal-ducted	NAXDKS15A112A*	•	•	•	•*6	_	•*6
		NAXDKS18A112A*				•*6	•*6	•*6
		PLA-A12EA7				•*6	•*6	•*6
		PLA-A12EA7			•	•*5 •*5	•*5	•*5 •*5
		PLA-A16EA7		•	•	•*5 •*5	•*5 •*5	•*5 •*5
	4-way Cassette					•*5 •*5	•*5 •*5	•*5 •*F
		PLA-A30EA7 PLA-A36EA7				•*5	•*5	•*5
						•*5	•*5	•*5
		PLA-A42EA7						
		PCA-A24KA7			•			
eries	Ceiling Suspended	PCA-A30KA7						
	22,2200	PCA-A36KA7						
		PCA-A42KA7						
		PEAD-A12AA7	•*3	•*3	•*3	•*6	•*6	•*6
		PEAD-A18AA7		•	•*3	•*6	•*6	•*6
	Horizontal-ducted	PEAD-A24AA7			•	•*6	•*6	•*6
		PEAD-A30AA7				•*6	•*6	•*6
		PEAD-A36AA7				•*6	•*6	•*6

Information is current as of this printing. Minimum installed capacity cannot be less than 12,000 BTU/H. A minimum of two indoor units must be connected to all MX outdoor units.

*2 Only one AMT Model can be connected.

*3 Maximum of two units can be connected unless the SPTB1 is utilized to power the indoor unit.

*4 Single unit can be connected.

*5 When the system includes even 1 unit of PLA-A-EA7, the number of the maximum connectable indoor units is decreased as follows: 3 for NAXMPH36A142**, 4 for NAXMPH42A152**, and 6 for NAXMPH48A182** and NAXMMX60A182**.

*6 Maximum of 3 horizontal ducted indoor units (PEAD or DKS) can be connected.

*7 Maximum of 2 horizontal ducted indoor units (PEAD or DKS) can be connected.

For more information, please refer to the service manual, application 1029 and the full compatibility chart on AmericanStandard.MyLinkDrive.com.

Conditions for Specifications

Temperature conditions are based on AHRI 210/240.

Cooling	Indoor	D.B. 80° F (27° C), W.B. 67° F (19° C)
Cooling	Outdoor	D.B. 95° F (35° C), W.B. 75° F (24° C)
Heating	Indoor	D.B. 70° F (21° C), W.B. 60° F (16° C)
rieating	Outdoor	D.B. 17° F (-8° C), W.B. 15° F (-9° C)

Refrigerant piping length: 16ft.

The figures for total input are based on the following voltages.

Series	Indoor unit	Outdoor unit
Nv-Series P-Series	_	208 / 230V ∙ Single phase ∙ 60Hz
MX Model		

Sound pressure level

- The sound pressure measurement is conducted in an anechoic chamber.
- The actual sound level depends on the distance from the unit and the acoustic environment.

Piping Installation

Nv-Series

Single type

Series	Class	Maximum Piping Length (ft)	Maximum Height Difference (ft)	Maximum Number of Bends
Genes	<outdoor unit=""></outdoor>	Total length (A)	Outdoor unit - Indoor unit (H)	Total number
NAXSPH	06/09/12	65	40	10
	15/18	100	50	10
NA(X/Y)SST	09/12/15	65	40	10
	18/24	100	50	10
NAXSMT	09/12/15/18	65	40	10
	24	100	50	10
NAXSPF	09/12	65	40	10
	15/18	100	50	10
NAXSKS/NAXSKH	09/12/15	65	40	10
	18	100	50	10
	24/30/36	100	100	10

P-Series

Single type


Series	Class	Maximum Piping Length (ft) Maximum Height Difference (ft)		Maximum Number of Bends
Concs	<outdoor unit=""></outdoor>	Total length (A)	Total length (A) Outdoor unit - Indoor unit (H)	
PUY	12/18	165	100	15
	24/30/36/42	225	100	15
PUZ	12/18	100	100	15
	24/30/36/42	165	100	15
PUZ-HA	24/30/36/42	245	100	15

MX Model

NAXMMX20A122AA

Maximum Piping Length				
Outdoor unit - Indoor unit (a,b)	82 ft.			
Total length (a+b)	164 ft.			


Maximum Number of Bends				
Outdoor unit - Indoor unit (a,b)	25			
Total number (a+b)	50			

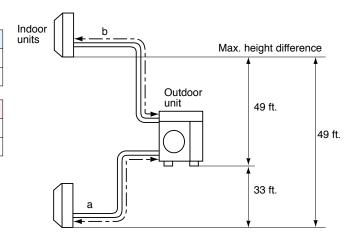

NAXMPH20A122AA

Maximum Piping Length			
Outdoor unit - Indoor unit (a,b) 82 ft.			
Total length (a+b)	164 ft.		


Maximum Number of Bends			
Outdoor unit - Indoor unit (a,b) 25			
Total number (a+b)	50		

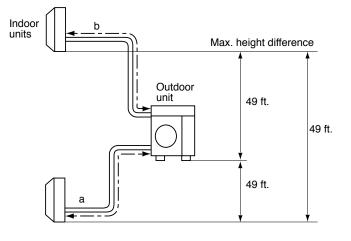

NAXMMX24A132AA, NAXMMX30A132AA, NAXMPH24A132AA, NAXMPH30A132AA

Maximum Piping Length			
Outdoor unit - Indoor unit (a,b,c) 82			
Total length (a+b+c)	230 ft.		


Maximum Number of Bends		
Outdoor unit - Indoor unit (a,b,c) 25		
Total number (a+b+c)	70	

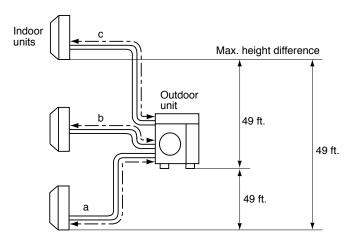

NAXMMX36A142AA

Maximum Piping Length			
Outdoor unit - Indoor unit (a,b,c,d) 82 ft.			
Total length (a+b+c+d)	230 ft.		


Maximum Number of Bends		
Outdoor unit - Indoor unit (a,b,c,d)		
Total number (a+b+c+d)	70	

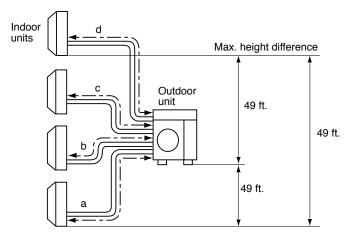

NAXMMX42A152AA


Maximum Piping Length		
Outdoor unit - Indoor unit (a,b,c,d,e)	82 ft.	
Total length (a+b+c+d+e)	262 ft.	

Maximum Number of Bends		
Outdoor unit - Indoor unit (a,b,c,d,e) 25		
Total number (a+b+c+d+e)	80	

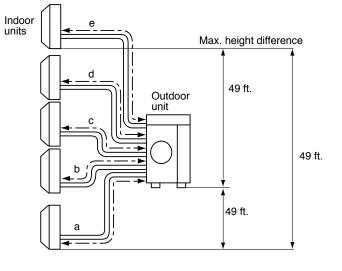

MX Model

NAXMPH36A142AA, NAXMPH42A152AA, NAXMPH48A182AA, NAXMMX48A182BA, NAXMMX60A182BA

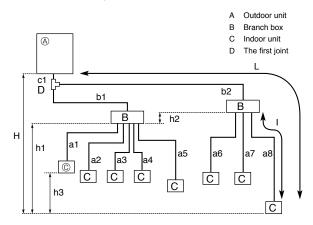

	Total piping length	c1 + b1 + b2 + a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8 ≤ 150 m (492 ft.)	
	Farthest piping length (L) *1	c1 + b2 + a8 ≤ 80 m (262 ft.)	
Permissible length (one-way)	Piping length between outdoor unit and branch boxes	c1 + b1 + b2 ≤ 55 m (180 ft.)	
	Farthest branch box from the first joint (b2)	b2 ≤ 30 m (98 ft.)	
(one way)	Farthest piping length after branch box (I)	a8 ≤ 25 m (82 ft.)	
	Total piping length between branch boxes and indoor units	a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8 ≤ 95 m (311 ft.)	
Permissible	In indoor/outdoor section (H) *2	H ≤ 50 m (164 ft.) (In case of outdoor unit is set higher than indoor unit)	
		H ≤ 40 m (131 ft.) (In case of outdoor unit is set lower than indoor unit)	
height difference	In branch box/indoor unit section (h1)	$h1 + h2 \le 15 \text{ m } (49 \text{ ft.})$	
(one-way)	In each branch unit (h2)	h2 ≤ 15 m (49 ft.)	
	In each indoor unit (h3)	h3 ≤ 12 m (39 ft.)	
Number of bends		c1 + b1 + a1 , $ c1 + b1 + a2 $, $ c1 + b1 + a3 $, $ c1 + b1 + a4 $, $ c1 + b1 + a5 $, $ c1 + b2 + a6 $, $ c1 + b2 + a7 $, $ c1 + b2 + a8 $ $ ≤ 15$	

^{*1} The piping specification table does not provide a minimum line set length. However, indoor units with connected piping length less than 16 ft. (5 m) could produce intermittent noise during normal system operation in very quiet environments. Please be aware of this important information when installing and locating the indoor unit within the conditioned space.

^{*2} Branch box should be placed within the level between the outdoor unit and indoor units.

Explanation of Terminology

Maximum piping length:

This is the maximum allowable length of the refrigerant piping. The amount of refrigerant pipe used cannot be longer than the length specified.

► Total length:

The maximum allowable combined length of all the refrigerant piping between the outdoor unit and indoor unit(s).

➤ Outdoor Unit - Indoor Unit:

The maximum allowable length of the refrigerant piping between the outdoor unit and indoor units installed when multiple units are connected to a single outdoor unit. This distance limitation refers to the maximum length between the outdoor unit and the farthest indoor unit.

► Pipe length difference from distribution pipe:

The maximum allowable difference in refrigerant piping length from the distribution pipe to the farthest indoor unit and from the distribution pipe to the closest indoor unit when multiple indoor units are connected to a single outdoor unit using a distribution pipe.

► Indoor Unit - Distribution Pipe:

The maximum allowable length of the refrigerant piping between indoor units and the distribution pipe when multiple indoor units are connected to a single outdoor unit.

Maximum height difference:

This is the maximum allowable height difference. It is necessary to install the air conditioning system so that the height distance is no more than the difference specified. (Specified differences may vary if the outdoor unit is installed higher or lower than the indoor units).

► Outdoor unit - Indoor unit:

The maximum allowable difference in height between the outdoor unit and indoor units when installed (when multiple indoor units are connected to a single outdoor unit, this distance limitation refers to the maximum height difference between the outdoor unit and an indoor unit).

▶ Indoor unit - Indoor unit:

The maximum allowable difference between the heights of indoor units when multiple indoor units are connected to a single outdoor unit.

Maximum number of bends:

This is the maximum allowable number of bends in the refrigerant piping. The total number of bends in the refrigerant piping used cannot exceed the number specified.

► Total number:

The maximum allowable number of bends for all refrigerant piping between the outdoor unit and indoor units.

► Outdoor unit - Indoor unit:

The maximum allowable number of bends between the outdoor unit and each indoor unit when multiple indoor units are connected to a single outdoor unit.

To ensure full capacity in cold and snowy regions...

3 IMPORTANT POINTS TO REMEMBER WHEN INSTALLING THE OUTDOOR UNIT




Wind and snow can significantly reduce capacity.

Be sure to check the information below and install the outdoor unit correctly.



Installation Location

Be aware of the prevailing wind direction in winter and install the outdoor unit where it is as sheltered as possible.

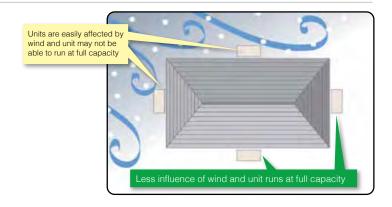

2


Measures for Drainage of Water

Case 1: Unit is installed close to passage (walkway)

Do not install the unit close to passage as drainage water from the unit may freeze and cause a slipping hazard.









Case 2: Multiple units are installed

Do not install units on top of one another as it may cause frozen drainage water on the bottom unit.






Measures for Snow

Do not install the unit on the ground


To avoid the adverse effects of snow and frozen drainage water, install the unit on a stand to ensure a sufficient height from the ground.

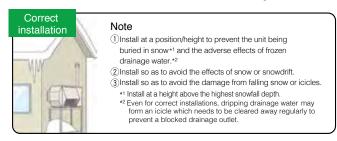







Use a stand to add sufficient height to protect the unit heat exchanger from snow and prevent icicles forming during defrost operation.





Install snow protection hood as necessary



Recommended accessories (drain socket & centralized drain pan, stand, snow protection hood, base heater)

	Snowy region	Cold region	Remarks	
	Countermeasures for snow	Countermeasures for freezing		
Drain socket, Centralized drain pan	Not used	Not used	Prevents freezing	
Stand	Needed	Needed	I. Install so as to prevent the unit being buried in snow (at a height greater than the highest snowfall depth). Be sure that the stand does not obstruct drainage. Install so as to prevent damage to the unit due to frozen drainage water (icicles). Clearance to prevent snow accumulating. Clearance to prevent snow accumulating.	
Snow protection hood	Needed *When the installation position is subject to snowfall.	_	Prevents heat exchanger from being covered in snow. Prevents snow accumulating inside the air duct.	
Base heater	_	Needed	Outdoor units equipped with a heater for cold regions are those with an "H" in the model name. For the cold-climate zone, use of a unit with a heater is strongly recommended. Even for the moderate-climate zone use of a unit with a heater is recommended for regions subject to high humidity in winter.	

⚠ CAUTION About disposal of drainage water

When the unit is installed in cold or snowy regions:

Drainage water may freeze in the drain socket/hose and prevent the fan from rotating.



Do not attach a drain socket packaged as an accessory to the unit.

* In the case that fitting a drain socket is absolutely necessary, steps must be taken so that the drainage water does not freeze.
For more information, please consult Mitsubishi Electric Trane HVAC US or one of its dealers/resellers.

Arrangement for snow protection hood

Separately sold parts are available for some models.

Please consult Mitsubishi Electric Trane HVAC US or one of its dealers/resellers at the time of purchase for details.

System Control

 $\label{thm:control} \textit{Versatile system controls can be achieved by using optional parts, relay circuits, control panels, etc.}$

	System Examples			
Indoor Unit	Nv Series Indoor Unit DKS, CKS, AMT		P Series Indoor Unit	
Outdoor Unit	Nv Series and MX Series Outdoor SKS and MX Series Outdoor		P Series Outdoor	
AAR-40MAAU Control	MAC-334IF-E Indoor unit AAR-40MAAU	Outdoor unit	Indoor unit AAR-40MAAU	
Details	Wired remote controller can be connected to indoor unit	Standard equipment (for indoor units compatible v	with wired remote controllers)	
Major Optional Parts Required	MAC-334IF-E (Interface) AAR-40MAAU (Wired remote controller)	AAR-40MAAU (Wired remote controller)		
Group Control System Group Control	Outdoor unit Indoor unit AAR-40MAAU	Indoor unit MAC-334IF-E AAR-40MAAU Outdoor unit	Indoor unit Indoor unit Indoor unit Indoor unit AAR-40MAAU	
Details	 One remote controller can control plural air conditioners with the same settings simultaneously. One remote controller can control up to 16 refrigerant systems. (When connected to a MX unit, MAC-334IF-E is counted as one system.) Up to two remote controller can be connected. 			
Major Optional Parts Required	MAC-334IF-E (Interface) AAR-40MAAU (Wired remote controller)		AAR-40MAAU (Wired remote controller)	
M-NET Connections	Outdoor unit Outdoor unit Outdoor unit Outdoor unit Outdoor unit City Multi indoor unit indoor unit MELANS system controller (AE-200A etc) PAC-SCS HCUA Power supply unit Unit	Outdoor unit Outdoor unit Indoor unit Indo	PAC-SCS INUAL Power supply kit Indoor unit	
Details	Group of air conditioners can be controlled by Note: When connecting to M-NET, the reduction of the control of the contro	MELANS system controller (M-NET). control for the power failure automatic recovery does	not operate and it will take 3 minutes to restart.	
Major Optional Parts Required	MAC-334IF-E (M-NET Interface) MELANS System controller PAC-SC51KUA (power supply unit)		PAC-SJ95MA-E/PAC-SJ96MA-E (M-NET converter) MELANS System controller PAC-SC51KUA (power supply unit)	

For Nv-Series Indoor Units


	System Examples	Connection Details	Control Details	Major Optional Parts Required
Permote On/Off Operation • Air conditioner can be started/ stopped remotely. (and can be used in combination)	MAC-334IF-E Switch Switch Remote control section (to be purchased locally)	Connect the interface to the air conditioner. Then connect the locally purchased remote controller to the terminal in the interface.	On/Off operation is possible from a remote location.	MAC-334IF-E (Interface) Parts for circuit such as relay box, lead wire, etc. (to be purchased locally)
2 Remote Display of Operation Status • The On/Off status of air conditioners can be confirmed remotely. (Power supply Indoor unit Resistance LED Remote monitor section (to be purchased locally)	Connect the interface to the air conditioner. Then connect the locally purchased remote controller to the terminal in the interface.	The operation status (On/Off) or error signals can be monitored from a remote location.	MAC-334IF-E (Interface) Parts for circuit to be purchased locally (DC power source needed) External power source (12V DC) is required when using MAC-334IF-E.

For P-Series and CKS, DKS and AMT Indoor Units

	System E	xamples	Detelle	M : 0 " 15 5 1
	Wired remote controller	Wireless remote controller	Details	Major Optional Parts Required
A 2-remote Controller Control With two remote controllers, control can be performed locally and remotely from two locations.	* Set Main' and 'Sub' remote controllers. (Example of 1 : 1 system)	PAR-FLSZMA AAR-dOMAAU *When using wired and wireless remote controllers (Example of Simultaneous Twin)	Up to two remote controllers can be connected to one group. Both wired and wireless remote controllers can be used in combination.	Wired Remote Controller AAR-40MAAU Wireless Remote Controller PAR-FL32MA Wireless Remote Controller Kit for PCA PAR-SL93B-E
B Operation Control by Level Signal Air conditioner can be started/ stopped remotely. In addition, On/Off operation by local remote controller can be prohibited/permitted.	Relay box (to be purchased) locally) Adapter for nonzel on/OH Remote Controller (Example of 1: 1 system x 2)	Relay box (to be purchased locally) Adapter for removed Control PAR-FL32MA (Example of 1 : 1 system x 2)	Operation other than On/Off (e.g., adjustment of temperature, fan speed, and airflow) can be performed even when remote controller operation is prohibited. Timer control is possible with an external timer.	Adapter for remote On/Off PAC-SE55RA-E Relay box (to be purchased locally) Remote control panel (to be purchased locally)
C Operation Control by Pulse Signal	Relay box (to be purchased) locally) Connector remote control remote control (Example of 1: 1 system x 2)	Relay box (to be purchased locally) Connector remote display Remote Control PAR-FL32MA (Example of 1 : 1 system x 2)	The pulse signal can be turned On/Off. Operation/emergency signal can be received at a remote location.	Connector cable for remote display PAC-SA88HA-E/PAC-725AD (10 pcs. x PAC-SA88HA-E) Relay box (to be purchased locally) Remote control panel (to be purchased locally)
Remote Display of Operating Status Operating status can be displayed at a remote location.	Renctic operation educated Connector cable for renctic display + Relay box Renctic Plant of the Connector Cable for renctic display + ARA-GOMAAU (Example of 1 : 1 system)	Remote operation edapter/ Connector cable for remote display + Relay box PAR-FL32MA (Example of Simultaneous Twin)	Operation/emergency signal can be received at a remote location (when channeled through the PAC-SF40RM-E → no-voltage signal, when channeled through the PAC-SA88HA-E → DC 12V signal).	Remote display panel (to be purchased locally) Connector cable for remote display PAC-SA88HA-E / PAC-725AD (10 pcs. x PAC-SA88HA-E) Relay box (to be purchased locally) Remote operation adapter PAC-SF40RM-E 'Unable to use with wireless remote controller
Allows On/Off operation with timer *For control by an external timer, refer to Only Operation Control by Level Signal.	AAR-40MAAU (Example of 1 : 1 system)		Weekly Timer: On/Off and up to 8 pattern temperatures can be set for each calendar day. (Initial setting) On/Off Timer: On/Off can be set once each within 72 hr in intervals of 5-minute units. Auto-off Timer: Operation will be switched off after a certain time elapse. Set time can be changed from 30 min. to 4 hr. at 10 min. intervals. Simple Timer and Auto-off Timer cannot be used at the same time.	Standard functions of AAR-40MAAU

Other Optional Parts

Part Name	Description
Deodorizing Filter Captures small foul-smelling substances in the air.	Decoursing filter
Air cleaning Filter Removes fine dust particles from the air by means of static electricity.	Air cleaning filter
Silver-ionized Air Purifier Filter Captures the bacteria, pollen and other allergens in the air and neutralizes them.	Silver-ionized Air Purifier Filter
Oil Mist Filter Element Filter element (12 pieces) that blocks the oil mist for ceiling-suspended models used in professional kitchens.	Filter frame Filter frame Oil mist filter
High-efficiency Filter Element Element for high-efficiency filter. Removes fine dust particles from the air.	Plua (for directing airflow) High-efficiency litter element "For 4-way cassette units (PLA)
Shutter Plate Plate for blocking an air outlet of the 4-way cassette (PLA) indoor unit.	Shutter Plate
Multi-functional Casement Casement for fresh-air intake and attaching the high-efficiency filter element (optional).	Indoor unit body Multi-functional casement
Space Panel Decorative cover for the installation when the ceiling height is low.	Space Panel Panel
Drain Pump Pumps drain water to a point higher than that where the unit is installed.	tor ceiling-suspended units

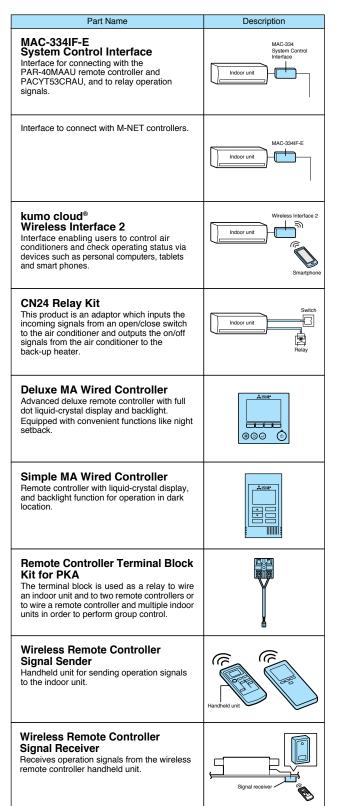

Part Name	Description
Wireless Remote Controller Kit (Sender & Receiver) Remote controller handheld unit (signal sender) and receiver (signal receiver) for ceiling- suspended units.	Signal receiver
Control Holder Holder for storing the remote controller.	Control holder
Remote Sensor Sensor to detect the room temperature at remote positions.	PAC-USSEN001-FM-1
PAC-715AD Remote On/Off Adapter Connector for receiving signals from the local system to control the on/off function.	Remote on/off adapter
Remote Operation Adapter Adapter to display the operation status and control on/off function from a distance.	Remote operation adapter
PAC-725AD Connector Plug for Remote Display Connector used to display the operation status and control on/off function from a distance.	Connector cable for remote display Brown Red Orange Yellow Green
Distribution Pipe Branch pipe for P Series simultaneous multisystem use, or to connect two branch boxes for MXZ.	Indoor unit Indoor unit Indoor unit Distribution pipe Outdoor unit P Series with 2 indoor units
Joint Pipe Part for connecting refrigerant pipes of different diameters.	Indoor unit Insulator Outdoor unit
Branch Box Outer Cover Casement for branch boxes.	Complete view Branch box outer cover

Part Name	Description
Air Protection Guide/Wind Baffle Protects the outdoor unit from the wind.	
Drain Socket A set of caps to cover unnecessary holes at the bottom of the outdoor unit, and a socket to guide drain water to the local drain pipe.	Cap
Centralized Drain Pan Catches drain water generated by the outdoor unit.	Outdoor unit Centralized drain par Base (local construction)
M-NET Converter Used to connect P Series A-control models to M-NET controllers.	Group remote controller Power supply unit for transmit cable
Control/Service Tool Monitoring tool to display operation and self-diagnosis data.	Control/service to
Air Discharge Guide Changes the direction of air being exhausted from the outdoor unit.	

Optional Parts List for Indoor [Nv-Series]

					WPH				MSZ	Z-EF		
			06	09	12	15	18	09NAW (B)(S)	12W (B)(S)	15W (B)(S)	18W (B)(S)	
	Deodorizing Filter	MAC-3000FT-E	•	•	•	•	•					
	Anti-allergy Enzyme Filter	MAC-408FT-E										
	Anti-allergy Enzyme Filter	MAC-1415FT-E										
	Electrostatic Anti-allergy Enzyme Filter	MAC-2330FT-E MAC-2320FT-E	•	•	•	•	•		•		_	
Filter	Electrostatic Anti-allergy Enzyme Filter Electrostatic Anti-allergy Enzyme Filter	MAC-2320FT-E MAC-2310FT-E						•	•	•	•	
	High Efficiency (MERV 8) Filter Element	PAC-SE81KF-E										
	High-efficiency Filter Element	PAC-SH59KF-E										
	High-efficiency Filter Element	PAC-SH89KF-E										
	High-efficiency Filter Element	PAC-SH90KF-E										
	Filter Box with MERV 8 Filters	FBL 1-1										
	Filter Box with MERV 8 Filters	FBL 1-2										
Filter Box	Filter Box with MERV 8 Filters	FBL 1-3										
	Filter Box with MERV 13 Filters	FBM2-2-A										
	Filter Box with MERV 13 Filters Filter Box with MERV 13 Filters	FBM2-3-A FBM2-4-A										
	Grille (required)	ALP-444W										
Grille	Grille (required)	SLP-15AAUW										
	Grille (required)	ALP-18FAU										
	i-see Sensor™	PAC-SH91MK-E										
i-see Sensor Panel	3D i-see Sensor® Corner Panel	PAC-SF1ME-E										
Sensor Panel	Grille with 3D i-see Sensor®	ALP-18FAEU										
	Grille with 3D i-see Sensor®	PLP-40EAEU										
Casement	Multi-function Casement	PAC-SJ41TM-E										
	Installation/Trim Panels	PLFY-ITP1										
Space Panel	Installation/Trim Panels	PLFY-ITP2										
Shutter Plate	Space Panel Shutter Plate	PAC-SJ38AS-E PAC-SJ37SP-E										
Silutter Flate	Converts low-profile ducted unit from rear to bottom	BRP-1										
Bottom Return Plate	Converts low-profile ducted unit from rear to bottom	BRP-2										
Return Plate	Converts low-profile ducted unit from rear to bottom	BRP-3										
	External Drain Pump	PAC-KE07DM-E										
Drain Pump	External Drain Pump	PAC-SH94DM-E										
Dialit i dilip	External Drain Pump	PAC-SH75DM-E										
	External Drain Pump	PAC-SH84DM-E										
	Blue Diamond Sensor Extension Cable — 15 Ft.	C13-103	•	•	•	•	•	•	•	•	•	
	Blue Diamond Alarm Extension Cable—6.5 Ft.	C13-192	•	•	•	•	•	•	•	•	•	
	Blue Diamond MultiTank—collection tank for use with multiple pumps	C21-014	•	•	•	•	•	•	•	•	•	
	Blue Diamond Rubber Foot Pads	F10-010	•	•	•	•	•	•	•	•	•	
	Mini Condensate Pump—230 volt application	SI30-230	•	•	•	•	•	•	•	•	•	
	MegaBlue Advanced Blue Diamond Condensate Pump w/ Reservoir & Sensor	X87-835 - 110 to 250V	•	•	•	•	•	•	•	•	•	
	MaxiBlue Advanced Blue Diamond Mini Condensate Pump w/ Reservoir & Sensor (110V) up to 48,000 BTU/H [recommended]	X87-711 - 110V	•	•	•	•	•	•	•	•	•	
	Advanced Blue Diamond Mini Condensate Pump w/ Reservoir & Sensor (208/230V) [recommended]	X87-721 - 208/230V	•	•	•	•	•	•	•	•	•	
	MicroBlue Blue Diamond Mini Condensate Pump (110/208/230V) up to 18,000 BTU/H	X85-003	•	•	•	•	•	•	•	•	•	
	Fascia Kit for MicroBlue Pump, mounts the MicroBlue and sensor directly beneath indoor unit	T18-016	•	•	•	•	•	•	•	•	•	
	Drain Pan Level Sensor	SS610E	•	•	•	•	•	•	•	•	•	
Disconnect Switch	(30A/600V/UL) [fits 2" X 4" utility box] - Black	TAZ-MS303	•	•	•	•	•	•	•	•	•	
Terminal Block	(30A/600V/UL) [fits 2" X 4" utility box] - White Separate Power Terminal Block Kit	TAZ-MS303W SPTB1	•	•	•	•	•	•	•	•	•	
	Electric Heat Lockout Control	ETC-211000-MIT										
Electric Fical Econotic	Downflow Kit	DFK-S										
Downflow Kit	Downflow Kit	DFK-M										
	Condensate Mgmt. Kit for downflow installation	CMA-1										
	3kW Electric Heater	EH03-MPA-S(B)										
	5kW Electric Heater	EH05-MPA-S(B)										
	8kW Electric Heater	EH08-MPA-S(B)										
	3kW Electric Heater	EH03-MPA-M(B)										
	5kW Electric Heater	EH05-MPA-M(B)										
	8kW Electric Heater	EH08-MPA-M(B)										
	3kW Electric Heater	EH03-SVZ-S EH05-SVZ-S										
Electric Kit Heats	5kW Electric Heater 8kW Electric Heater	EH05-SVZ-S EH08-SVZ-S										
	5kW Electric Heater	EH05-SVZ-M										
	8kW Electric Heater	EH08-SVZ-M										
	10kW Electric Heater	EH10-SVZ-M										
	10kW Electric Heater	EH10-MPA-M(B)										
	10kW Electric Heater	EH10-MPA-L(B)										
	15kW Electric Heater	EH15-MPAS- L(B)										
	17kW Electric Heater	EH17- MPAS-L(B)					1					
	Guides air flow for floor mount model when a	ETTT WITHOUGH		-			-					

		,	M/ST U-	at Pump	,					WMT		Wall I	Mount WMT	115\/		10/	EL				NA/OT	Cooling	Only		
06	09	12	15	18	24	30	36	09	12	15	18	24	09	12	09	12	18	24	09	12	15	18	24	30	36
•	•	•	•	•				•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
						•	•																	•	•
					•																		•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•							
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•							
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

Optional Parts List for Indoor [Nv-Series]

				Floor	Mount			EZ FIT™		
				FI	KS .			UKS		
			09	12	15	18	09	12	18	
	Deodorizing Filter	MAC-3000FT-E								
	Anti-allergy Enzyme Filter	MAC-408FT-E	•	•	•	•	•	•	•	
	Anti-allergy Enzyme Filter	MAC-1415FT-E								
	Electrostatic Anti-allergy Enzyme Filter	MAC-2330FT-E								
Filter	Electrostatic Anti-allergy Enzyme Filter Electrostatic Anti-allergy Enzyme Filter	MAC-2320FT-E MAC-2310FT-E								
	High Efficiency (MERV 8) Filter Element	PAC-SE81KF-E								
	High-efficiency Filter Element	PAC-SH59KF-E								
	High-efficiency Filter Element	PAC-SH89KF-E								
	High-efficiency Filter Element	PAC-SH90KF-E								
	Filter Box with MERV 8 Filters	FBL 1-1								
	Filter Box with MERV 8 Filters	FBL 1-2								
Filter Box	Filter Box with MERV 8 Filters	FBL 1-3								
	Filter Box with MERV 13 Filters	FBM2-2-A								
	Filter Box with MERV 13 Filters	FBM2-3-A								
	Filter Box with MERV 13 Filters	FBM2-4-A								
Grille	Grille (required)	ALP-444W SLP-15AAUW					•	•	•	
Grille	Grille (required) Grille (required)	ALP-18FAU								
	i-see Sensor™	PAC-SH91MK-E								
inoc	3D i-see Sensor® Corner Panel	PAC-SF1ME-E								
i-see Sensor Panel	Grille with 3D i-see Sensor®	ALP-18FAEU								
	Grille with 3D i-see Sensor®	PLP-40EAEU								
Casement	Multi-function Casement	PAC-SJ41TM-E								
	Installation/Trim Panels	PLFY-ITP1								
Space Panel	Installation/Trim Panels	PLFY-ITP2								
	Space Panel	PAC-SJ38AS-E								
Shutter Plate	Shutter Plate	PAC-SJ37SP-E								
	Converts low-profile ducted unit from rear to bottom	BRP-1								
Bottom Return Plate	Converts low-profile ducted unit from rear to bottom	BRP-2								
	Converts low-profile ducted unit from rear to bottom	BRP-3								
	External Drain Pump	PAC-KE07DM-E								
Drain Pump	External Drain Pump	PAC-SH94DM-E								
	External Drain Pump	PAC-SH75DM-E								
	External Drain Pump	PAC-SH84DM-E								
	Blue Diamond Sensor Extension Cable—15 Ft.	C13-103	•	•	•	•				
	Blue Diamond Alarm Extension Cable—6.5 Ft. Blue Diamond MultiTank—collection tank for use with multiple pumps	C13-192 C21-014	•	•	•	•				
	Blue Diamond Rubber Foot Pads	F10-010			•	•				
	Mini Condensate Pump—230 volt application	SI30-230			•	•				
	MegaBlue Advanced Blue Diamond Condensate	X87-835 - 110 to 250V								
Condensate	Pump w/ Reservoir & Sensor MaxiBlue Advanced Blue Diamond Mini Condensate Pump w/ Reservoir & Sensor (110V) up to 48,000 BTU/H [recommended]	X87-711 - 110V			•		•	•		
	BTU/H [recommended] Advanced Blue Diamond Mini Condensate Pump w/	X87-721 - 208/230V	•		•	•	•	•	•	
	Reservoir & Sensor (208/230V) [recommended] MicroBlue Blue Diamond Mini Condensate Pump				_	_				
	(110/208/230V) up to 18,000 BTU/H Fascia Kit for MicroBlue Pump, mounts the MicroBlue	X85-003 T18-016								
	and sensor directly beneath indoor unit									
	Drain Pan Level Sensor (30A/600V/UL) [fits 2" X 4" utility box] - Black	SS610E TAZ-MS303	•	•	•	•	•	•	•	
Disconnect Switch	(30A/600V/UL) [fits 2" X 4" utility box] - White	TAZ-MS303W	<u> </u>		•			•	•	
Terminal Block	Separate Power Terminal Block Kit	SPTB1			-	-	-	-		
	Electric Heat Lockout Control	ETC-211000-MIT								
	Downflow Kit	DFK-S								
Downflow Kit	Downflow Kit	DFK-M								
	Condensate Mgmt. Kit for downflow installation	CMA-1								
	3kW Electric Heater	EH03-MPA-S(B)								
	5kW Electric Heater	EH05-MPA-S(B)								
	8kW Electric Heater	EH08-MPA-S(B)								
	3kW Electric Heater	EH03-MPA-M(B)								
	5kW Electric Heater	EH05-MPA-M(B)								
	8kW Electric Heater	EH08-MPA-M(B)								
	3kW Electric Heater	EH03-SVZ-S								
Electric Kit Heats	5kW Electric Heater	EH05-SVZ-S								
rat ricats	8kW Electric Heater	EH08-SVZ-S								
	5kW Electric Heater	EH05-SVZ-M								
	8kW Electric Heater 10kW Electric Heater	EH08-SVZ-M EH10-SVZ-M								
	10kW Electric Heater 10kW Electric Heater	EH10-SVZ-M EH10-MPA-M(B)								
	10kW Electric Heater	EH10-MPA-M(B)								
	15kW Electric Heater	EH15-MPAS- L(B)								
	17kW Electric Heater	EH17- MPAS-L(B)								
loor Mount Air Guide	Guides air flow for floor mount model when a		<u> </u>							
IOUI IVIOUNI AII GUIGE	concealer is used to hide the floor mount.	MAC-760FD-E	•	•	•	•				

	4-way Ceili					tal-ducted			Mult	-position Air Ha	ndler	
	CI					KS				AMT		
09	12	15	18	09	124	154	184	12	18	24	30	36
				•								
					•	•	•					
•	•	•	•									
<u>*</u>	_											
 •	•	•	•									
•	•	•	•									
				•	•	•						
							•					
				•	•	•	•					
_	_	_	_	_	_	_	_					
•	•	•	•	•	•	•	•					
•	•	•	•	•	•	•	•					
•	•	•	•	•	•	•	•					
•	•	•	•	•	•	•	•					
•	•	•	•	•	•	•	•	•	•	•	•	•
								•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•
•		•	•	•	•			•	•	•	•	•
								•	•	•	•	•
								•	•	•	•	•
								•	•	•		
								•	•	•		
									_		•	•
											•	•
											•	•

Optional Parts List for Indoor [P-Series]

				,	Wall Moun	t			Ceiling-sı	uspended		
					PKA	1	1		PC	A-		
			A12HA7	A18HA7	A24KA7	A30KA7	A36KA7	A24KA7	A30KA7	A36KA7	A42KA7	
	Deodorizing Filter	MAC-3000FT-E										
	Anti-allergy Enzyme Filter	MAC-408FT-E										
	Anti-allergy Enzyme Filter	MAC-1415FT-E										
	Electrostatic Anti-allergy Enzyme Filter	MAC-2330FT-E										
Filter	Electrostatic Anti-allergy Enzyme Filter	MAC-2320FT-E										
	Electrostatic Anti-allergy Enzyme Filter	MAC-2310FT-E										
	High Efficiency (MERV 8) Filter Element	PAC-SE81KF-E						•	•	•	•	
	High-efficiency Filter Element	PAC-SH59KF-E						_				
	High-efficiency Filter Element	PAC-SH89KF-E						•	•			
	High-efficiency Filter Element	PAC-SH90KF-E								•	•	
	Filter Box with MERV 8 Filters	FBL 1-1 FBL 1-2										
	Filter Box with MERV 8 Filters Filter Box with MERV 8 Filters	FBL 1-3										
Filter Box	Filter Box with MERV 13 Filters	FBM2-2-A										
	Filter Box with MERV 13 Filters	FBM2-3-A										
	Filter Box with MERV 13 Filters	FBM2-4-A										
		ALP-444W										
Grille	Grille (required)											
Grille	Grille (required)	SLP-15AAUW										
	Grille (required) i-see Sensor™	ALP-18FAU PAC-SH91MK-E						•		•	_	
								•	•	•	•	
i-see Sensor Panel	3D i-see Sensor® Corner Panel	PAC-SF1ME-E										
	Grille with 3D i-see Sensor® Grille with 3D i-see Sensor®	ALP-18FAEU										
0		PLP-40EAEU										
Casement	Multi-function Casement	PAC-SJ41TM-E PLFY-ITP1										
0 5 1	Installation/Trim Panels											
Space Panel	Installation/Trim Panels	PLFY-ITP2										
Obustan Diete	Space Panel	PAC-SJ38AS-E										
Shutter Plate	Shutter Plate	PAC-SJ37SP-E										
Bottom	Converts low-profile ducted unit from rear to bottom	BRP-1										
Return Plate	Converts low-profile ducted unit from rear to bottom	BRP-2 BRP-3										
	Converts low-profile ducted unit from rear to bottom											
	External Drain Pump	PAC-KE07DM-E			_	_	_					
Drain Pump	External Drain Pump	PAC-SH94DM-E		_	•	•	•					
	External Drain Pump	PAC-SH75DM-E	•	•								
	External Drain Pump	PAC-SH84DM-E				_		•	•	•	•	
	Blue Diamond Sensor Extension Cable—15 Ft.	C13-103	•	•	•	•	•	•	•	•	•	
	Blue Diamond Alarm Extension Cable — 6.5 Ft.	C13-192										
	Blue Diamond MultiTank—collection tank for use with multiple pumps	C21-014										
	Blue Diamond Rubber Foot Pads	F10-010										
	Mini Condensate Pump—230 volt application	SI30-230	•	•	•	•	•					
	MegaBlue Advanced Blue Diamond Condensate Pump w/ Reservoir & Sensor	X87-835 - 110 to 250V										
Condensate		7.07 000 110 10 2001	-	_	_	_	_	-	_	-	_	
	MaxiBlue Advanced Blue Diamond Mini Condensate Pump w/ Reservoir & Sensor (110V) up to 48,000 BTU/H [recommended]	X87-711 - 110V										
	Advanced Blue Diamond Mini Condensate Pump w/ Reservoir & Sensor (208/230V) [recommended]	X87-721 - 208/230V	•	•	•	•	•	•	•	•	•	
	MicroBlue Blue Diamond Mini Condensate Pump	X85-003		•								
	(110/208/230V) up to 18,000 BTU/H											
	Fascia Kit for MicroBlue Pump, mounts the MicroBlue and sensor directly beneath indoor unit	T18-016	•	•								
	Drain Pan Level Sensor	SS610E	•	•	•	•	•					
Disconnect Switch	(30A/600V/UL) [fits 2" X 4" utility box] - Black	TAZ-MS303	•	•	•	•	•	•	•	•	•	
Disconnect Switch	(30A/600V/UL) [fits 2" X 4" utility box] - White	TAZ-MS303W	•	•	•	•	•	•	•	•	•	
Terminal Block	Separate Power Terminal Block Kit	SPTB1										
Electric Heat Lockout	Electric Heat Lockout Control	ETC-211000-MIT										
	Downflow Kit	DFK-S										
Downflow Kit	Downflow Kit	DFK-M										
	Condensate Mgmt. Kit for downflow installation	CMA-1										
	3kW Electric Heater	EH03-MPA-S(B)										
	5kW Electric Heater	EH05-MPA-S(B)										
	8kW Electric Heater	EH08-MPA-S(B)										
	3kW Electric Heater	EH03-MPA-M(B)										
	5kW Electric Heater	EH05-MPA-M(B)										
	8kW Electric Heater	EH08-MPA-M(B)										
	3kW Electric Heater	EH03-SVZ-S										
	5kW Electric Heater	EH05-SVZ-S										
	8kW Electric Heater	EH08-SVZ-S										
	5kW Electric Heater	EH05-SVZ-M										
	8kW Electric Heater	EH08-SVZ-M										
	10kW Electric Heater	EH10-SVZ-M										
	10kW Electric Heater	EH10-MPA-M(B)										
	10kW Electric Heater	EH10-MPA-L(B)										
	15kW Electric Heater	EH15-MPAS- L(B)										
		EH17- MPAS-L(B)										
	17kW Electric Heater	LITIT- WIFAG-L(D)										
loor Mount Air Guide	Guides air flow for floor mount model when a concealer is used to hide the floor mount.	MAC-760FD-E										

	4	-way Ceilir PL		е					Ceiling-c						Mı	ulti-positior PV	n Air Hand /A-	ier	
A12FA7	A18F47			A36EA7	A42FA7	Δ09ΔΔ7	Δ12ΔΔ7	Δ15ΔΔ7			Δ30ΔΔ7	Δ36ΔΔ7	Δ42ΔΔ7	Δ12ΔΔ7	A18AA7			Δ36ΔΔ7	Δ42ΔΔ7
AIZEAI	ATOLAI	AZ4LAI	ASULAI	ASOLAI	A4ZEAI	AUSAAI	AIZAAI	AIJAAI	ATOAAT	AZHAAI	ASUAAI	ASUAAI	A4ZAAI	AIZAAI	ATOAAI	AZHAAI	ASUAAI	ASUAAI	A4ZAAI
•	•	•	•	•	•														
						•	•	•	•										
										•	•								
												•	•						
•	•	•	•	•	•														
•	•	•	•	•	•														
•	•	•	_	•	•														
•	•	•	•	•	•														
•	•	•	•	•	•														
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
														•	•	•	•	•	•
														•	•	•	•	•	
														•	•	•	•	•	•
														•	•				•
														•	•				
																•	•		
																•	•		
																•	•		
																•	•	•	•
																		•	•
																			•

Optional Parts List for Outdoor [Nv-Series]

on pipe on pipe ch box lapter a Box t Guide wanced saffle vanced saffle	Twinning Distribution Pipe (50:50) Flare Connection Brazed Port Adapter size: 3/8" x 5/8" Port Adapter size: 1/4" x 3/8" Port Adapter size: 1/2" X 3/8" Port Adapter size: 1/2" X 3/8" Port Adapter size: 1/2" X 5/8" Port Adapter size: 1/2" X 5/8" Port Adapter size: 5/8" x 3/4" Branch Box Branch Box Branch Box Branch Box Outer Cover Air Outlet Guide Front Wind Baffle Front Wind Baffle Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle Rear Advanced Wind Baffle Rear Advanced Wind Baffle Rear Advanced Wind Baffle	MSDD-50TR-E MSDD-50BR-E PAC-50F6RJ-E PAC-493PI MAC-A454JP-E MAC-A455JP-E MAC-A456JP-E ADF5834 TAC-MKA52BC TAC-MKA32BC BBE-1 MAC-881SG MAC-886SG-E MAC-886SG-E PAC-SJ07SG-E PAC-SJ07SG-E PAC-SJ07SG-E	•	09	12	15	18	06	09	12
on pipe ch box lapter a Box t Guide d Baffle vanced vanced	Flare Connection Brazed Port Adapter size: 3/8" x 5/8" Port Adapter size: 1/4" x 3/8" Port Adapter size: 3/8" X 1/2" Port Adapter size: 1/2" X 3/8" Port Adapter size: 1/2" X 3/8" Port Adapter size: 1/2" X 5/8" Port Utlet Guide Air Outlet Guide Air Outlet Guide Air Outlet Guide Air Outlet Guide Front Wind Baffle Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle	MSDD-50AR-E MSDD-50BR-E PAC-S976RJ-E PAC-493PI MAC-A454JP-E MAC-A456JP-E MAC-A456JP-E ADP5834 TAC-MKA52BC TAC-MKA32BC BBE-1 MAC-881SG MAC-886SG-E MAC-856SG PAC-SJ07SG-E PAC-SJ07SG-E	•	•						
lapter I Box It Guide It Guide	Brazed Port Adapter size: 3/8" x 5/8" Port Adapter size: 1/4" x 3/8" Port Adapter size: 1/2" X 3/8" Port Adapter size: 1/2" X 3/8" Port Adapter size: 1/2" X 5/8" Port Adapter size: 1/2" X 5/8" Port Adapter size: 1/2" X 5/8" Port Adapter size: 5/8" x 3/4" Branch Box Branch Box Branch Box Uster Cover Air Outlet Guide Fort Wind Baffle Front Wind Baffle Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle	MSDD-50BR-E PAC-\$676RJ-E PAC-493PI MAC-A454JP-E MAC-A455JP-E MAC-A455JP-E ADP5834 TAC-MKA52BC TAC-MKA52BC BBE-1 MAC-881SG MAC-886SG-E MAC-856SG PAC-SJ07SG-E PAC-SJ07SG-E PAC-SG59SG-E	•	•						
lapter n Box t Guide d Baffle vanced vanced	Port Adapter size: 3/8" x 5/8" Port Adapter size: 1/4" x 3/8" Port Adapter size: 1/2" X 3/8" Port Adapter size: 1/2" X 3/8" Port Adapter size: 1/2" X 5/8" Port Adapter size: 1/2" X 5/8" Port Adapter size: 5/8" x 3/4" Branch Box Branch Box Branch Box Branch Box Branch Box Uter Cover Air Outlet Guide Front Wind Baffle Front Wind Baffle Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle	PAC-SG76RJ-E PAC-493PI MAC-A454JP-E MAC-A455JP-E MAC-A455JP-E AD-5834 TAC-MKA52BC TAC-MKA52BC BBE-1 MAC-881SG MAC-886SG-E MAC-856SG PAC-SJ07SG-E PAC-SJ07SG-E PAC-SG59SG-E	•	•						
n Box t Guide d Baffle vanced saffle	Port Adapter size: 1/4" x 3/8" Port Adapter size: 3/8" X 1/2" Port Adapter size: 3/8" X 3/8" Port Adapter size: 1/2" X 3/8" Port Adapter size: 1/2" X 5/8" Port Adapter size: 5/8" x 3/4" Branch Box Branch Box Branch Box Branch Box Air Outlet Guide Front Wind Baffle Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle	PAC-493PI MAC-A454JP-E MAC-A455JP-E MAC-A456JP-E ADP5834 TAC-MKA52BC TAC-MKA32BC BBE-1 MAC-881SG MAC-886SG-E MAC-856SG PAC-SU75G-E PAC-SU75G-E PAC-SU59SG-E	•	•						
n Box t Guide d Baffle vanced saffle	Port Adapter size: 3/8" X 1/2" Port Adapter size: 1/2" X 3/8" Port Adapter size: 1/2" X 5/8" Port Adapter size: 5/8" x 3/4" Branch Box Branch Box Branch Box Outer Cover Air Outlet Guide Fort Wind Baffle Front Wind Baffle Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle	MAC-A454JP-E MAC-A455JP-E MAC-A456JP-E ADP5834 TAC-MKA52BC TAC-MKA32BC BBE-1 MAC-881SG MAC-886SG-E MAC-856SG PAC-SJ07SG-E PAC-SJ07SG-E PAC-SG59SG-E	•	•						
n Box t Guide d Baffle vanced saffle	Port Adapter size: 1/2" X 3/8" Port Adapter size: 1/2" X 5/8" Port Adapter size: 1/2" X 5/8" Port Adapter size: 5/8" x 3/4" Branch Box Branch Box Branch Box Outer Cover Air Outlet Guide Fort Wind Baffle Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle	MAC-A455JP-E MAC-A456JP-E ADP5834 TAC-MKA52BC TAC-MKA32BC BBE-1 MAC-881SG MAC-886SG-E MAC-856SG PAC-SJP6SG-E PAC-SJ07SG-E PAC-SG59SG-E	•	•						
t Guide Id Baffle vanced Saffle	Port Adapter size: 1/2" X 5/8" Port Adapter size: 5/8" x 3/4" Branch Box Branch Box Branch Box Outer Cover Air Outlet Guide Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle	MAC-A456JP-E ADP5834 TAC-MKA52BC TAC-MKA32BC BBE-1 MAC-881SG MAC-886SG-E MAC-856SG PAC-SU75G-E PAC-SU75G-E PAC-SU75G-E	•	•						
t Guide Id Baffle vanced Saffle	Port Adapter size: 5/8" x 3/4" Branch Box Branch Box Outer Cover Air Outlet Guide Front Wind Baffle Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle	ADP5834 TAC-MKA52BC TAC-MKA32BC BBE-1 MAC-881SG MAC-886SG-E MAC-856SG PAC-SU7SG-E PAC-SU7SG-E PAC-SG59SG-E	•	•						
t Guide Id Baffle vanced Saffle	Branch Box Branch Box Branch Box Outer Cover Air Outlet Guide Front Wind Baffle Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle	TAC-MKA32BC BBE-1 MAC-881SG MAC-886SG-E MAC-856SG PAC-SH96SG-E PAC-SJ07SG-E PAC-SG59SG-E	•	•						
t Guide Id Baffle vanced Saffle	Branch Box Outer Cover Air Outlet Guide Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle	BBE-1 MAC-881SG MAC-886SG-E MAC-856SG PAC-SH96SG-E PAC-SH96SG-E PAC-SG59SG-E	•	•						
vanced Baffle	Air Outlet Guide Front Wind Baffle Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle	MAC-881SG MAC-886SG-E MAC-856SG PAC-SH96SG-E PAC-SJ07SG-E PAC-SG59SG-E	•	•						
vanced Baffle	Air Outlet Guide Front Wind Baffle Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle	MAC-886SG-E MAC-856SG PAC-SH96SG-E PAC-SJ07SG-E PAC-SG59SG-E	•	•						
vanced Baffle	Air Outlet Guide Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle	MAC-856SG PAC-SH96SG-E PAC-SJ07SG-E PAC-SG59SG-E			•			•	•	•
vanced Baffle	Air Outlet Guide Air Outlet Guide Air Outlet Guide Front Wind Baffle Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle	PAC-SH96SG-E PAC-SJ07SG-E PAC-SG59SG-E				•	•			
vanced Baffle	Air Outlet Guide Air Outlet Guide Front Wind Baffle Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle	PAC-SJ07SG-E PAC-SG59SG-E								
vanced Baffle	Air Outlet Guide Front Wind Baffle Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle	PAC-SG59SG-E								
vanced Baffle	Front Wind Baffle Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle									
vanced Baffle	Front Wind Baffle Front Wind Baffle Rear Advanced Wind Baffle									
vanced Baffle	Front Wind Baffle Rear Advanced Wind Baffle	WB-PA3								
/anced	Rear Advanced Wind Baffle	WB-PA4								
/anced		WB-PA5								
/anced	Rear Advanced Wind Baffle	WB-RE4								
/anced		WB-RE5								
vanced Baffle	Rear Advanced Wind Baffle	WB-RE6								
Baffle	Side Advanced Wind Baffle	WB-SD4								
	Side Advanced Wind Baffle	WB-SD5								
	Side Advanced Wind Baffle	WB-SD6								
	Drain Socket (1st-gen)	PAC-SF37DS-E								
	Drain Socket	PAC-SG60DS-E								
	Drain Socket	PAC-SG61DS-E								
ocket	Drain Socket	MAC-860DS	•	•	•	•	•			
	Drain Socket	MAC-811DS								
	Drain Socket (6 gap)	MAC-851DS								
	Drain Socket (6-gen)	PAC-SH71DS-E								
	Drain Socket Optional Defrost Heater	PAC-SJ08DS-E MAC-640BH-U	•							
	Optional Defrost Heater Optional Defrost Heater	MAC-640BH-U MAC-641BH-U	•	•	•					
anal .	Optional Defrost Heater	MAC-642BH-U1				•	•			
nal Heater	Optional Defrost Heater	PAC-645BH-E				-				
-	Optional Defrost Heater	PAC-646BH-E								
	Optional Defrost Heater	PAC-SJ20BH-E								
	Centralized Drain Pan	PAC-SH97DP-E								
ilized Pan	Centralized Drain Fan	PAC-SG63DP-E								
ran	Centralized Drain Pan	PAC-SG64DP-E								
	M-NET Converter	PAC-IF01MNT-E								
	M-NET Converter	PAC-SJ19MA-E								
ET	M-NET Converter	PAC-SJ85MA-E								
erter	M-NET Converter	PAC-SJ96MA-E								
	M-NET Converter	PAC-SJ95MA-E								
rvice Tool	Control/Service Tool	PAC-SK52ST								
-	Refrigeration Ball Valve-Flare/Schrader/Insulated—1/2" size	BV12FFSI2								
fals ra	Refrigeration Ball Valve-Flare/Schrader/Insulated—1/4" size	BV14FFSI2								
'alve		BV38FFSI2								
	Refrigeration Ball Valve-Flare/Schrader/Insulated — 5/8" size	BV58FFSI2								
	Hail Guard	HG-A1								
	Hail Guard	HG-A2								
	Hail Guard	HG-A3								
	Hail Guard	HG-B4	•	•	•			•	•	•
uards		HG-A5								
		HG-A6								
		HG-A7				•	•			
		HG-A8								
		HG-A9								
r I Init	Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic	DSD-400P	•	•	•	•	•	•	•	•
r Unit ig Pad	Condensing Unit Mounting Pad 16" x 36" x 3"	ULTRILITE1	•	•	•	•	•	•	•	•
-		ULTRILITE2								
	Outdoor Unit Stand—12" High	QSMS1201M	•	•	•	•	•	•	•	•
	Outdoor Unit Stand—18" High	QSMS1801M	•	•	•	•	•	•	•	•
oor	Outdoor Unit Stand—24" High	QSMS2401M	•	•	•	•	•	•	•	•
tand	Outdoor Unit Stand—12" High	QSMS1202M								
	Outdoor Unit Stand—18" High	QSMS1802M								
	Outdoor Unit Stand—24"High	QSMS2402M								
acket	Heavy Duty Wall Mounting Bracket—Coated Steel	QSWB2000M-1	•	•	•	•	•	•	•	•
		QSWBSS MLC143913T 15	•	•	•	•	•	•	•	•
		MLS143812T-15	•	•	•			•	•	•
	`	MLS143812T-30	•	•	•			•	•	•
	,	MLS143812T-50	•	•	•			•	•	•
	, ,	MLS143812T-65 MLS141212T-15	•	•	•	_	_	•	•	•
	·	MLS141212T-15				•	•			
	·	MLS141212T-30				•	•			
		MLS141212T-50				•	•			
		MLS141212T-65				•	•			
a a t		MLS141212T-100		1		•	•			
set		MPLS385812T-10	1							
set			_							
set	15' x 3/8" x 15' x 5/8" Lineset (Twin-Tube Insulation)	MPLS385812T-15								
set	15' x 3/8" x 15' x 5/8" Lineset (Twin-Tube Insulation) 30' x 3/8" x 30' x 5/8" Lineset (Twin-Tube Insulation)	MPLS385812T-15 MPLS385812T-30								
set	15' x 3/8" x 15' x 5/8" Lineset (Twin-Tube Insulation) 30' x 3/8" x 30' x 5/8" Lineset (Twin-Tube Insulation) 50' x 3/8" x 50' x 5/8" Lineset (Twin-Tube Insulation)	MPLS385812T-15 MPLS385812T-30 MPLS385812T-50								
set	15' x 3/8" x 15' x 5/8" Lineset (Twin-Tube Insulation) 30' x 3/8" x 30' x 5/8" Lineset (Twin-Tube Insulation) 50' x 3/8" x 50' x 5/8" Lineset (Twin-Tube Insulation) 65' x 3/8" x 65' x 5/8" Lineset (Twin-Tube Insulation)	MPLS385812T-15 MPLS385812T-30 MPLS385812T-50 MPLS385812T-65								
set	15' x 3/8" x 15' x 5/8" Lineset (Twin-Tube Insulation) 30' x 3/8" x 30' x 5/8" Lineset (Twin-Tube Insulation) 50' x 3/8" x 50' x 5/8" Lineset (Twin-Tube Insulation) 65' x 3/8" x 65' x 5/8" Lineset (Twin-Tube Insulation) 100' x 3/8" x 100' x 5/8" Lineset (Twin-Tube Insulation)	MPLS385812T-15 MPLS385812T-30 MPLS385812T-50								

24	•	•		•	•
Only 18	•	•		•	•
Γ Cooling C	•	•	•	•	•
\$S** 12	•	•		•	•
09	•	•	•	•	•
24	•	•		•	•
18	•	•		•	•
SMT 15	•	•		•	•
12	•	•		•	•
09	•	•		•	•
36		•		•	•
30		•		•	•
np 24	•	•		•	•
T Heat Pur	•	•		•	•
SS 15	•	•		•	•
12	•	•	•	•	•
09	•	•	•	•	•
PH 18	•			•	•
15	•			•	•

Optional Parts List for Outdoor [Nv-Series]

			COTO							
				ling Only	0.5	SF		4.5		115V
Dietribution nine	Twinning Distribution Pipe (50:50)	MSDD-50TR-E	30	36	09	12	15	18	09	12
tribution pipe	Flare Connection	MSDD-501R-E MSDD-50AR-E	-							-
stribution pipe or Branch box										
אין	Brazed	MSDD-50BR-E	-							
	Port Adapter size: 3/8" x 5/8"	PAC-SG76RJ-E								
	Port Adapter size: 1/4" x 3/8"	PAC-493PI	-							-
Port Adapter	Port Adapter size: 3/8" X 1/2"	MAC-A454JP-E								
. orradpto.	Port Adapter size: 1/2" X 3/8"	MAC-A455JP-E								
	Port Adapter size: 1/2" X 5/8"	MAC-A456JP-E								
	Port Adapter size: 5/8" x 3/4"	ADP5834								
	Branch Box	TAC-MKA52BC								
Branch Box	Branch Box	TAC-MKA32BC								
	Branch Box Outer Cover	BBE-1								
	Air Outlet Guide	MAC-881SG			•	•			•	•
	Air Outlet Guide	MAC-886SG-E						•		
	Air Outlet Guide	MAC-856SG								
Air Outlet Guide	Air Outlet Guide	PAC-SH96SG-E								
	Air Outlet Guide	PAC-SJ07SG-E								
	Air Outlet Guide	PAC-SG59SG-E								
	Front Wind Baffle	WB-PA3								
ont Wind Baffle	Front Wind Baffle	WB-PA4								
	Front Wind Baffle	WB-PA5								
oor Advo	Rear Advanced Wind Baffle	WB-RE4								
ear Advanced Wind Baffle	Rear Advanced Wind Baffle	WB-RE5								
340	Rear Advanced Wind Baffle	WB-RE6								
	Side Advanced Wind Baffle	WB-SD4								
Side Advanced Wind Baffle	Side Advanced Wind Baffle	WB-SD5								
vviilu Dallië	Side Advanced Wind Baffle	WB-SD6								
	Drain Socket (1st-gen)	PAC-SF37DS-E								
	Drain Socket	PAC-SG60DS-E								
	Drain Socket	PAC-SG61DS-E								
	Drain Socket	MAC-860DS	1							
Drain Socket			-	_					•	<u> </u>
	Drain Socket	MAC-811DS	•	•						
	Drain Socket	MAC-851DS	-							
	Drain Socket (6-gen)	PAC-SH71DS-E								-
	Drain Socket	PAC-SJ08DS-E								
	Optional Defrost Heater	MAC-640BH-U								
	Optional Defrost Heater	MAC-641BH-U								
Optional Defrost Heater	Optional Defrost Heater	MAC-642BH-U1								
Defrost Heater	Optional Defrost Heater	PAC-645BH-E								
	Optional Defrost Heater	PAC-646BH-E								
	Optional Defrost Heater	PAC-SJ20BH-E								
	Centralized Drain Pan	PAC-SH97DP-E								
Centralized Drain Pan	Centralized Drain Pan	PAC-SG63DP-E								
Drain Pan	Centralized Drain Pan	PAC-SG64DP-E								
	M-NET Converter	PAC-IF01MNT-E								
	M-NET Converter	PAC-SJ19MA-E								
M-NET										
Converter	M-NET Converter	PAC-SJ85MA-E								
	M-NET Converter	PAC-SJ96MA-E								
	M-NET Converter	PAC-SJ95MA-E	-							-
ntrol/Service Tool	Control/Service Tool	PAC-SK52ST								
	Refrigeration Ball Valve-Flare/Schrader/Insulated — 1/2" size	BV12FFSI2								
Ball Valve	Refrigeration Ball Valve-Flare/Schrader/Insulated — 1/4" size	BV14FFSI2								
Juli valve	Refrigeration Ball Valve-Flare/Schrader/Insulated — 3/8" size	BV38FFSI2								
	Refrigeration Ball Valve-Flare/Schrader/Insulated — 5/8" size	BV58FFSI2								
	Hail Guard	HG-A1								
	Hail Guard	HG-A2								
	Hail Guard	HG-A3								
	Hail Guard	HG-B4								
Hail Guards	Hail Guard	HG-A5			-	-			-	-
an Guarus	Hail Guard	HG-A6								_
	Hail Guard	HG-A6 HG-A7					•	_		
							•	•		
	Hail Guard	HG-A8								
	Hail Guard	HG-A9								-
Outdoor Linit	Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic	DSD-400P	•	•	•	•	•	•	•	•
Outdoor Unit Mounting Pad	Condensing Unit Mounting Pad 16" x 36" x 3"	ULTRILITE1	•	•	•	•	•	•	•	•
	Condensing Unit Mounting Pad 24" x 42" x 3"	ULTRILITE2								
	Outdoor Unit Stand—12" High	QSMS1201M	•	•	•	•	•	•	•	•
	Outdoor Unit Stand—18" High	QSMS1801M	•	•	•	•	•	•	•	•
Outdoor	Outdoor Unit Stand—24" High	QSMS2401M	•	•	•	•	•	•	•	•
Unit Stand	Outdoor Unit Stand—12" High	QSMS1202M								
	Outdoor Unit Stand—18" High	QSMS1802M								
	Outdoor Unit Stand—16 Tright	QSMS2402M								
	Heavy Duty Wall Mounting Bracket—Coated Steel	QSWB2000M-1	-	_	_	_	•	•	_	
Wall Blacket			•	•	•	•			•	_
	Heavy Duty Wall Mounting Bracket—316 Series Stainless Steel	QSWBSS	•	•	•	•	•	•	•	•
	15' x 1/4" x 15' / 3/8" Lineset (Twin-Tube Insulation)	MLS143812T-15			•	•			•	•
	30' x 1/4" x 30' / 3/8" Lineset (Twin-Tube Insulation)	MLS143812T-30	-		•	•			•	•
	50' x 1/4" x 50' / 3/8" Lineset (Twin-Tube Insulation)	MLS143812T-50			•	•			•	•
	65' x 1/4" x 65' / 3/8" Lineset (Twin-Tube Insulation)	MLS143812T-65			•	•			•	•
	15' x 1/4" x 15' / 1/2" Lineset (Twin-Tube Insulation)	MLS141212T-15					•	•		
	30' x 1/4" x 30' / 1/2" Lineset (Twin-Tube Insulation)	MLS141212T-30					•	•		
	50' x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation)	MLS141212T-50					•	•		
	65' x 1/4" x 65' / 1/2" Lineset (Twin-Tube Insulation)	MLS141212T-65					•	•		
	100' x 1/4" x 100' / 1/2" Lineset (Twin-Tube Insulation)	MLS141212T-100					•	•		
Lineset	x x E	MPLS385812T-10	•	•				_		
Lineset	10' x 3/8" x 10' x 5/8" Lineset (Twin-Tube Inculation)			-						
Lineset	10' x 3/8" x 10' x 5/8" Lineset (Twin-Tube Insulation)		_	_						
Lineset	15' x 3/8" x 15' x 5/8" Lineset (Twin-Tube Insulation)	MPLS385812T-15	•	•						
Lineset	15' x 3/8" x 15' x 5/8" Lineset (Twin-Tube Insulation) 30' x 3/8" x 30' x 5/8" Lineset (Twin-Tube Insulation)	MPLS385812T-15 MPLS385812T-30	•	•						
Lineset	15' x 3/8" x 15' x 5/8" Lineset (Twin-Tube Insulation) 30' x 3/8" x 30' x 5/8" Lineset (Twin-Tube Insulation) 50' x 3/8" x 50' x 5/8" Lineset (Twin-Tube Insulation)	MPLS385812T-15 MPLS385812T-30 MPLS385812T-50	•	•						
Lineset	15' x 3/8" x 15' x 5/8" Lineset (Twin-Tube Insulation) 30' x 3/8" x 30' x 5/8" Lineset (Twin-Tube Insulation) 50' x 3/8" x 50' x 5/8" Lineset (Twin-Tube Insulation) 65' x 3/8" x 65' x 5/8" Lineset (Twin-Tube Insulation)	MPLS385812T-15 MPLS385812T-30 MPLS385812T-50 MPLS385812T-65	•	•						
Lineset	15' x 3/8" x 15' x 5/8" Lineset (Twin-Tube Insulation) 30' x 3/8" x 30' x 5/8" Lineset (Twin-Tube Insulation) 50' x 3/8" x 50' x 5/8" Lineset (Twin-Tube Insulation) 65' x 3/8" x 56' x 5/8" Lineset (Twin-Tube Insulation) 100' x 3/8" x 100' x 5/8" Lineset (Twin-Tube Insulation)	MPLS385812T-15 MPLS385812T-30 MPLS385812T-50 MPLS385812T-65 MPLS385812T-100	•	•						
Lineset	15' x 3/8" x 15' x 5/8" Lineset (Twin-Tube Insulation) 30' x 3/8" x 30' x 5/8" Lineset (Twin-Tube Insulation) 50' x 3/8" x 50' x 5/8" Lineset (Twin-Tube Insulation) 65' x 3/8" x 65' x 5/8" Lineset (Twin-Tube Insulation)	MPLS385812T-15 MPLS385812T-30 MPLS385812T-50 MPLS385812T-65	•	•						

									#		+	+	<u> </u>	+					#		#	#	+
	•	•	•	•	•*1	• *1					•		•	•	•		•	•	•			•	•
	36 •	•	•	•	● *1	● *1					•		•	•	•		•	•	•			•	•
MP	30	•	•		•							•	•	•			•	•	•	•	•		
	24	•	•		•							•	•	•			•	•	•	•	•		
	20	•	•		•							•	•	•			•	•	•	•			
	60 •	•	•	•	•*1	●*1		•			•		•	•	•		•	•	•				•
	48	•	•	•	•*1	●*1		•			•		•	•	•		•	•	•			•	•
	42	•	•		•			•		•		•	•	•			•	•	•	•	•		
MMX	36	•	•		•			•		•		•	•	•			•	•	•	•	•		
	30	•	•		•			•		•		•	•	•			•	•	•	•	•		
	24	•	•		•			•		•		•	•	•			•	•	•	•	•		
	20	•	•		•						•	•	•	•		•	•	•	•	•			
	24				•			•		•						•	•	•	•			•	•
SEL	18			•				•	•						•			•	•	•	•		
	12			•				•	•						•		•	•	•	•			
	09			_	•			•	•					_	•		•	•	•	-			

Optional Parts List for Outdoor [Nv-Series]

Distribution pipe						
Dietribution nine				SKS	45	
	Twinning Distribution Pipe (50:50)	MSDD-50TR-E	09	12	15	
	Flare Connection	MSDD-501R-E				
Distribution pipe for Branch box	Brazed	MSDD-50BR-E				
	Port Adapter size: 3/8" x 5/8"	PAC-SG76RJ-E				
	Port Adapter size: 1/4" x 3/8"	PAC-493PI				
	Port Adapter size: 3/8" X 1/2"	MAC-A454JP-E				
Port Adapter	Port Adapter size: 1/2" X 3/8"	MAC-A455JP-E		•*2		
	Port Adapter size: 1/2" X 5/8"	MAC-A456JP-E				
	Port Adapter size: 5/8" x 3/4"	ADP5834				
	Branch Box	TAC-MKA52BC				
Branch Box	Branch Box	TAC-MKA32BC				
	Branch Box Outer Cover	BBE-1				
	Air Outlet Guide Air Outlet Guide	MAC-881SG MAC-886SG-E	•	•	•	
	Air Outlet Guide Air Outlet Guide	MAC-856SG				
Air Outlet Guide	Air Outlet Guide	PAC-SH96SG-E				
	Air Outlet Guide	PAC-SJ07SG-E				
	Air Outlet Guide	PAC-SG59SG-E				
	Front Wind Baffle	WB-PA3				
Front Wind Baffle	Front Wind Baffle	WB-PA4				
	Front Wind Baffle	WB-PA5				
Door Advanced	Rear Advanced Wind Baffle	WB-RE4				
Rear Advanced Wind Baffle	Rear Advanced Wind Baffle	WB-RE5				
	Rear Advanced Wind Baffle	WB-RE6				
Side Advanced	Side Advanced Wind Baffle	WB-SD4				
Side Advanced Wind Baffle	Side Advanced Wind Baffle	WB-SD5				
	Side Advanced Wind Baffle Drain Socket (1st-gen)	WB-SD6 PAC-SF37DS-E				
	Drain Socket (1st-gen) Drain Socket	PAC-SG60DS-E				
	Drain Socket	PAC-SG61DS-E				
	Drain Socket	MAC-860DS				
Drain Socket	Drain Socket	MAC-811DS				
	Drain Socket	MAC-851DS				
	Drain Socket (6-gen)	PAC-SH71DS-E				
	Drain Socket	PAC-SJ08DS-E				
	Optional Defrost Heater	MAC-640BH-U	•	•	•	
	Optional Defrost Heater	MAC-641BH-U				
Optional Defrost Heater	Optional Defrost Heater	MAC-642BH-U1				
Derrost Heater	Optional Defrost Heater	PAC-645BH-E				
	Optional Defrost Heater	PAC-646BH-E PAC-SJ20BH-E				
	Optional Defrost Heater Centralized Drain Pan	PAC-SH97DP-E				
Centralized	Centralized Drain Pan Centralized Drain Pan	PAC-SG63DP-E				
Drain Pan	Centralized Drain Pan	PAC-SG64DP-E				
	M-NET Converter	PAC-IF01MNT-E				
	M-NET Converter	PAC-SJ19MA-E				
M-NET Converter	M-NET Converter	PAC-SJ85MA-E				
Conventer	M-NET Converter	PAC-SJ96MA-E				
	M-NET Converter	PAC-SJ95MA-E				
Control/Service Tool	Control/Service Tool	PAC-SK52ST				
	Refrigeration Ball Valve-Flare/Schrader/Insulated — 1/2" size	BV12FFSI2				
Ball Valve	Refrigeration Ball Valve-Flare/Schrader/Insulated — 1/4" size	BV14FFSI2				
	Refrigeration Ball Valve-Flare/Schrader/Insulated — 3/8" size Refrigeration Ball Valve-Flare/Schrader/Insulated — 5/8" size	BV38FFSI2 BV58FFSI2				
	Hail Guard	HG-A1				
	Hail Guard	HG-A2				
	Hail Guard	HG-A3				
	Hail Guard	HG-B4	•	•	•	
Hail Guards	Hail Guard	HG-A5				
	Hail Guard	HG-A6				
	Hail Guard	HG-A7				
	Hail Guard	HG-A8				
	Hail Guard	HG-A9				
Outdoor Unit	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic	HG-A9 DSD-400P	•	•	•	
Outdoor Unit Mounting Pad	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3"	HG-A9 DSD-400P ULTRILITE1	•	•	•	
Outdoor Unit Mounting Pad	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3"	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2	•	•	•	
Outdoor Unit Mounting Pad	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand—12" High	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M		•		
Mounting Pad	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand—12" High Outdoor Unit Stand—18" High	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1801M	•	•	•	
Outdoor Unit Mounting Pad Outdoor Unit Stand	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand—12" High	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M	•	•	•	
Mounting Pad	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand—12" High Outdoor Unit Stand—18" High Outdoor Unit Stand—24" High	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1801M QSMS2401M	•	•	•	
Mounting Pad	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand — 12" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 12" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 24"High	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1801M QSMS2401M QSMS1202M	•	•	•	
Outdoor Unit Stand	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand — 12" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 12" High Outdoor Unit Stand — 12" High Outdoor Unit Stand — 12" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 18" High Heavy Duty Wall Mounting Bracket—Coated Steel	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1801M QSMS2401M QSMS1202M QSMS1802M QSMS1802M QSMS1802M QSMS2402M QSMS2402M QSWS2000M-1	•	•	•	
Mounting Pad	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand — 12" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 12" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 24" High Heavy Duty Wall Mounting Bracket—Coated Steel Heavy Duty Wall Mounting Bracket—316 Series Stainless Steel	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1801M QSMS2401M QSMS2401M QSMS1802M QSMS2402M QSMS2402M QSMS2402M QSMS2402M QSWS2000M-1 QSWBSS	•	•	•	
Outdoor Unit Stand	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand—12" High Outdoor Unit Stand—18" High Outdoor Unit Stand—24" High Outdoor Unit Stand—12" High Outdoor Unit Stand—18" High Outdoor Unit Stand—24" High Outdoor Unit Stand—3" High Outdoor Unit Stand—42" High Heavy Duty Wall Mounting Bracket—Coated Steel Heavy Duty Wall Mounting Bracket—316 Series Stainless Steel 15' x 1/4' x 15' / 3/8" Lineset (Twin-Tube Insulation)	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1801M QSMS2401M QSMS1802M QSMS2402M QSMS2402M QSMS2402M QSMS2402M QSMS2402M QSWS2402M QSWS2402M QSWSS402M QSWSS402M QSWSS8	•	•	•	
Outdoor Unit Stand	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand — 12" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 12" High Outdoor Unit Stand — 24" High Heavy Duty Wall Mounting Bracket — Coated Steel Heavy Duty Wall Mounting Bracket — 316 Series Stainless Steel 15' x 1/4" x 15' / 3/6" Lineset (Twin-Tube Insulation) 30' x 1/4" x 30' / 3/8" Lineset (Twin-Tube Insulation)	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1801M QSMS2401M QSMS2401M QSMS1202M QSMS1802M QSMS1402M QSMS2402M QSMS2402M QSWB2000M-1 QSWBSS MLS143812T-15 MLS143812T-30	•	•	•	
Outdoor Unit Stand	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand — 12" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 24" High Heavy Duty Wall Mounting Bracket — Coated Steel Heavy Duty Wall Mounting Bracket — 316 Series Stainless Steel 15' x 1/4" x 15' / 3/8" Lineset (Twin-Tube Insulation) 30' x 1/4" x 30' / 3/8" Lineset (Twin-Tube Insulation) 50' x 1/4" x 50' / 3/8" Lineset (Twin-Tube Insulation)	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1201M QSMS2401M QSMS2401M QSMS1202M QSMS1202M QSMS2402M QSMS2402M QSMS2402M QSWB2000M-1 QSWBSS MLS143812T-15 MLS143812T-30 MLS143812T-50	•	•	•	
Outdoor Unit Stand	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand — 12" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 12" High Outdoor Unit Stand — 12" High Outdoor Unit Stand — 12" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 18" High Ou	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1801M QSMS2401M QSMS2401M QSMS2402M QSMS2402M QSMS2402M QSMS2402M QSWB2000M-1 QSWBSS MLS143812T-15 MLS143812T-30 MLS143812T-50 MLS143812T-56	•	•	•	
Outdoor Unit Stand	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand—12" High Outdoor Unit Stand—18" High Outdoor Unit Stand—24" High Outdoor Unit Stand—12" High Outdoor Unit Stand—12" High Outdoor Unit Stand—24" High Outdoor Unit Stand—12" High Outdoor Unit Stand—24" High Heavy Duty Wall Mounting Bracket—Coated Steel Heavy Duty Wall Mounting Bracket—316 Series Stainless Steel 15' x 1/4" x 15' / 3/8" Lineset (Twin-Tube Insulation) 30' x 1/4" x 30' / 3/8" Lineset (Twin-Tube Insulation) 65' x 1/4" x 65' / 3/8" Lineset (Twin-Tube Insulation) 15' x 1/4" x 15' / 1/2" Lineset (Twin-Tube Insulation)	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1801M QSMS2401M QSMS2401M QSMS1802M QSMS2402M QSMS2402M QSMS2402M QSWB2300M-1 QSWBS200M-1 QSWBS3 MLS143812T-15 MLS143812T-50 MLS143812T-50 MLS143812T-56 MLS1441212T-15	•	•	•	
Outdoor Unit Stand	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand — 12" High Outdoor Unit Stand — 24" High Heavy Duty Wall Mounting Bracket — Coated Steel Heavy Duty Wall Mounting Bracket — 316 Series Stainless Steel 15' x 1/4" x 15' / 3/8" Lineset (Twin-Tube Insulation) 30' x 1/4" x 30' / 3/8" Lineset (Twin-Tube Insulation) 55' x 1/4" x 15' / 1/2" Lineset (Twin-Tube Insulation) 15' x 1/4" x 15' / 1/2" Lineset (Twin-Tube Insulation) 30' x 1/4" x 30' / 1/2" Lineset (Twin-Tube Insulation)	HG-A9 DSD-400P ULTRILITE1 ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1801M QSMS1202M QSMS1202M QSMS1202M QSMS2402M QSMS2402M QSMS2402M GSMS2402M GSMS2402	•	•	•	
Outdoor Unit Stand	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand — 12" High Outdoor Unit Stand — 18" High Ou	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1201M QSMS2401M QSMS2401M QSMS2402M QSMS2402M QSMS2402M QSMS2402M QSMS2402M GSMS2402M	•	•	•	
Outdoor Unit Stand Wall Blacket	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand — 12" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 18" High Ou	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1801M QSMS2401M QSMS2401M QSMS2401M QSMS2402M QSMS2402M QSMS2402M QSWB2000M-1 QSWBSS MLS143812T-15 MLS143812T-50 MLS143812T-55 MLS141212T-15 MLS141212T-15 MLS141212T-50 MLS141212T-50 MLS141212T-50	•	•	•	
Outdoor Unit Stand	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand — 12" High Outdoor Unit Stand — 18" High Ou	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1201M QSMS2401M QSMS2401M QSMS2402M QSMS2402M QSMS2402M QSMS2402M QSMS2402M GSMS2402M	•	•	•	
Outdoor Unit Stand Wall Blacket	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand — 12" High Outdoor Unit Stand — 12" High Outdoor Unit Stand — 24" High Heavy Duty Wall Mounting Bracket — Coated Steel Heavy Duty Wall Mounting Bracket — 316 Series Stainless Steel 15' x 1/4" x 15' / 3/8" Lineset (Twin-Tube Insulation) 30' x 1/4" x 30' / 3/8" Lineset (Twin-Tube Insulation) 65' x 1/4" x 55' / 3/8" Lineset (Twin-Tube Insulation) 65' x 1/4" x 30' / 1/2" Lineset (Twin-Tube Insulation) 30' x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation) 50' x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation) 50' x 1/4" x 65' / 1/2" Lineset (Twin-Tube Insulation) 50' x 1/4" x 65' / 1/2" Lineset (Twin-Tube Insulation) 50' x 1/4" x 65' / 1/2" Lineset (Twin-Tube Insulation) 50' x 1/4" x 10' / 1/2" Lineset (Twin-Tube Insulation)	HG-A9 DSD-400P ULTRILITE1 ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1801M QSMS1801M QSMS1202M QSMS1802M QSMS2402M QSWB2000M-1 QSWB2000M-1 QSWB85 MLS143812T-15 MLS143812T-50 MLS143812T-50 MLS14212T-15 MLS14212T-15 MLS14212T-15	•	•	•	
Outdoor Unit Stand Wall Blacket	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand — 12" High Outdoor Unit Stand — 12" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 24" High Heavy Duty Wall Mounting Bracket — Coated Steel Heavy Duty Wall Mounting Bracket — 316 Series Stainless Steel 15' x 1/4" x 15' / 3/8" Lineset (Twin-Tube Insulation) 30' x 1/4" x 30' / 3/8" Lineset (Twin-Tube Insulation) 55' x 1/4" x 45' / 3/8" Lineset (Twin-Tube Insulation) 30' x 1/4" x 30' / 3/8" Lineset (Twin-Tube Insulation) 55' x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation) 50' x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation) 50' x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation) 50' x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation) 50' x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation) 50' x 1/4" x 10' / 1/2" Lineset (Twin-Tube Insulation) 10' x 1/4" x 10' / 1/2" Lineset (Twin-Tube Insulation)	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1201M QSMS2401M QSMS2401M QSMS2402M QSMS1802M QSMS2402M	•	•	•	
Outdoor Unit Stand Wall Blacket	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand — 12" High Outdoor Unit Stand — 18" High Ou	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1201M QSMS2401M QSMS2401M QSMS2402M QSMS2402M QSMS2402M QSWB2000M-1 QSWBS2000M-1 QSWBSS MLS143812T-15 MLS143812T-30 MLS143812T-65 MLS143812T-65 MLS141212T-15 MLS143812T-65 MLS141212T-15 MLS143812T-65 MLS141212T-10 MPLS385812T-10 MPLS385812T-10	•	•	•	
Outdoor Unit Stand Wall Blacket	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand — 12" High Outdoor Unit Stand — 12" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 12" High Outdoor Unit Stand — 24" High Heavy Duty Wall Mounting Bracket — 316 Series Stainless Steel 15" x 1/4" x 15' / 3/6" Lineset (Twin-Tube Insulation) 30" x 1/4" x 30' / 3/6" Lineset (Twin-Tube Insulation) 55" x 1/4" x 50' / 3/6" Lineset (Twin-Tube Insulation) 55" x 1/4" x 30' / 1/2" Lineset (Twin-Tube Insulation) 50" x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation) 50" x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation) 50" x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation) 50" x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation) 10" x 3/8" x 10" x 5/8" Lineset (Twin-Tube Insulation) 10" x 3/8" x 15' x 5/8" Lineset (Twin-Tube Insulation) 10" x 3/8" x 15' x 5/8" Lineset (Twin-Tube Insulation)	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1801M QSMS2401M QSMS2401M QSMS2401M QSMS2402M QSMS2402M QSMS2402M QSWB2000M-1 QSWB2000M-1 QSWB8S MLS143812T-15 MLS143812T-50 MLS143812T-50 MLS143812T-50 MLS143812T-50 MLS143812T-50 MLS143812T-50 MLS143812T-50 MLS141212T-10 MLS143812T-50 MLS141212T-10 MPLS385812T-10 MPLS385812T-10 MPLS385812T-10	•	•	•	
Outdoor Unit Stand Wall Blacket	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand — 12" High Outdoor Unit Stand — 18" High Ou	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1201M QSMS1201M QSMS2401M QSMS2401M QSMS2402M QSMS2402M QSMS2402M QSMS2402M QSWB2000M-1 QSWBSS MLS143812T-15 MLS143812T-30 MLS143812T-50 MLS143812T-65 MLS143812T-65 MLS143812T-65 MLS141212T-16 MLS141212T-10 MPLS385812T-10 MPLS385812T-10 MPLS385812T-10 MPLS385812T-50 MPLS385812T-50 MPLS385812T-50 MPLS385812T-50 MPLS385812T-50 MPLS385812T-50 MPLS385812T-50 MPLS385812T-50	•	•	•	
Outdoor Unit Stand Wall Blacket	Hail Guard Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic Condensing Unit Mounting Pad 16" x 36" x 3" Condensing Unit Mounting Pad 24" x 42" x 3" Outdoor Unit Stand — 12" High Outdoor Unit Stand — 12" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 24" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 18" High Outdoor Unit Stand — 18" High Heavy Duty Wall Mounting Bracket — Coated Steel Heavy Duty Wall Mounting Bracket — 316 Series Stainless Steel 15' x 1/4" x 15' / 3/8" Lineset (Twin-Tube Insulation) 30' x 1/4" x 30' / 3/8" Lineset (Twin-Tube Insulation) 50' x 1/4" x 50' / 3/8" Lineset (Twin-Tube Insulation) 55' x 1/4" x 15' / 1/2" Lineset (Twin-Tube Insulation) 50' x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation) 50' x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation) 50' x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation) 50' x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation) 50' x 1/4" x 50' / 5/8" Lineset (Twin-Tube Insulation) 50' x 3/8" x 10' x 5/8" Lineset (Twin-Tube Insulation) 50' x 3/8" x 10' x 5/8" Lineset (Twin-Tube Insulation) 50' x 3/8" x 50' x 5/8" Lineset (Twin-Tube Insulation) 50' x 3/8" x 50' x 5/8" Lineset (Twin-Tube Insulation) 50' x 3/8" x 50' x 5/8" Lineset (Twin-Tube Insulation) 50' x 3/8" x 50' x 5/8" Lineset (Twin-Tube Insulation)	HG-A9 DSD-400P ULTRILITE1 ULTRILITE2 QSMS1201M QSMS1201M QSMS1201M QSMS2401M QSMS1202M QSMS1202M QSMS2402M QSMS2402M QSMS2402M QSMS2402M QSMS2402M QSMS2402M QSWB22000M-1 QSWBS2 MLS143812T-15 MLS143812T-50 MLS143812T-50 MLS143812T-50 MLS141212T-15 MLS141212T-15 MLS141212T-50 MLS141212T-50 MLS141212T-50 MLS141212T-10 MPLS385812T-10 MPLS385812T-10 MPLS385812T-15 MPLS385812T-50 MPLS385812T-50 MPLS385812T-50	•	•	•	

	Sł	(S			Sh	(H	
18	24	30	36	09	12	15	18
					•*2		
				•	•	•	
•	•	•	•	-	-	_	•
				•	•	•	
	_	_					
•	•	•	•				•
				•	•	•	
				•	-		
•	•	•	•				•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
				•	•	•	
				•	•	•	
				•	•	•	
•							•
•							•
•							•
•							•
•		_					•
	•	•	•				
	•	•	•				
	•	•	•				
	•	•	•				
	•	•	•				

Optional Parts List for Outdoor [P-Series]

			1201647	18NKA7	PU 24NHA7	Y-A	36NKA7	42NIKA7	
			12NKA7 (-BS)	18NKA7 (-BS)	(-BS)	30NHA7 (-BS)	(-BS)	42NKA7 (-BS)	
Distribution pipe	Twinning Distribution Pipe (50:50)	MSDD-50TR-E	(50)	(50)	•	(50)	•	(50)	
Distribution pipe	Flare Connection	MSDD-50AR-E							
for Branch box	Brazed	MSDD-50BR-E							
	Port Adapter size: 3/8" x 5/8"	PAC-SG76RJ-E							
	Port Adapter size: 1/4" x 3/8"	PAC-493PI							
Port Adapter	Port Adapter size: 3/8" X 1/2"	MAC-A454JP-E							
1 of thaupter	Port Adapter size: 1/2" X 3/8"	MAC-A455JP-E							
	Port Adapter size: 1/2" X 5/8"	MAC-A456JP-E							
	Port Adapter size: 5/8" x 3/4"	ADP5834							
Branch Box	Branch Box	TAC-MKA52BC							
	Branch Box	TAC-MKA32BC							
anch Box Outer Cover		BBE-1							
	Air Outlet Guide	MAC-881SG							
	Air Outlet Guide	MAC-886SG-E							
Air Outlet Guide	Air Outlet Guide	MAC-856SG					+4	+4	
	Air Outlet Guide	PAC-SH96SG-E					•*1	•*1	
	Air Outlet Guide	PAC-SJ07SG-E	•	•	_	_			
	Air Outlet Guide Front Wind Baffle	PAC-SG59SG-E WB-PA3			•	•	•*1	-*4	
Front Wind Dofflo			_				• 1	•*1	
Front Wind Baffle	Front Wind Baffle	WB-PA4	•	•					
	Front Wind Baffle	WB-PA5	_		•	•			
Rear Advanced	Rear Advanced Wind Baffle	WB-RE4	•	•					
Rear Advanced Wind Baffle	Rear Advanced Wind Baffle Rear Advanced Wind Baffle	WB-RE5			•	•		_	
		WB-RE6					•	•	
Side Advanced	Side Advanced Wind Baffle	WB-SD4	•	•					
Wind Baffle	Side Advanced Wind Baffle	WB-SD5			•	•			
	Side Advanced Wind Baffle	WB-SD6					•	•	
	Drain Socket (1st-gen)	PAC-SF37DS-E							
	Drain Socket	PAC-SG60DS-E							
	Drain Socket	PAC-SG61DS-E			•	•	•	•	
Drain Socket	Drain Socket	MAC-860DS			1				
3.a 030NO	Drain Socket	MAC-811DS							
	Drain Socket	MAC-851DS							
	Drain Socket (6-gen)	PAC-SH71DS-E							
	Drain Socket	PAC-SJ08DS-E	•	•					
	Optional Defrost Heater	MAC-640BH-U							
	Optional Defrost Heater	MAC-641BH-U							
Optional Defrost Heater	Optional Defrost Heater	MAC-642BH-U1							
Defrost Heater	Optional Defrost Heater	PAC-645BH-E							
	Optional Defrost Heater	PAC-646BH-E							
	Optional Defrost Heater	PAC-SJ20BH-E							
041:1	Centralized Drain Pan	PAC-SH97DP-E					•	•	
Centralized Drain Pan	Centralized Drain Pan	PAC-SG63DP-E	•	•					
	Centralized Drain Pan	PAC-SG64DP-E			•	•			
	M-NET Converter	PAC-IF01MNT-E							
MAIST	M-NET Converter	PAC-SJ19MA-E	•	•					
M-NET Converter	M-NET Converter	PAC-SJ85MA-E			•	•	•	•	
0011101101	M-NET Converter	PAC-SJ96MA-E	•	•					
	M-NET Converter	PAC-SJ95MA-E			•	•	•	•	
Control/Service Tool	Control/Service Tool	PAC-SK52ST	•	•	•	•	•	•	
	Refrigeration Ball Valve-Flare/Schrader/Insulated — 1/2" size	BV12FFSI2							
Ball Valve	Refrigeration Ball Valve-Flare/Schrader/Insulated — 1/4" size	BV14FFSI2							
Dali valve	Refrigeration Ball Valve-Flare/Schrader/Insulated — 3/8" size	BV38FFSI2							
	Refrigeration Ball Valve-Flare/Schrader/Insulated — 5/8" size	BV58FFSI2							
	Hail Guard	HG-A1							
	Hail Guard	HG-A2					•	•	
	Hail Guard	HG-A3							
	Hail Guard	HG-B4							
Hail Guards	Hail Guard	HG-A5	•	•					
	Hail Guard	HG-A6			•	•			
	Hail Guard	HG-A7							
	Hail Guard	HG-A8							
	Hail Guard	HG-A9							
0.44 11.5	Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic	DSD-400P							
Outdoor Unit Mounting Pad	Condensing Unit Mounting Pad 16" x 36" x 3"	ULTRILITE1	•	•					
	Condensing Unit Mounting Pad 24" x 42" x 3"	ULTRILITE2			•	•	•	•	
	Outdoor Unit Stand—12" High	QSMS1201M	•	•	•	•			
	Outdoor Unit Stand—18" High	QSMS1801M	•	•	•	•			
Outdoor	Outdoor Unit Stand—24" High	QSMS2401M	•	•	•	•			
Unit Stand	Outdoor Unit Stand—12" High	QSMS1202M					•	•	
	Outdoor Unit Stand—18" High	QSMS1802M					•	•	
	Outdoor Unit Stand—24"High	QSMS2402M					•	•	
Mell Die 1 1	Heavy Duty Wall Mounting Bracket—Coated Steel	QSWB2000M-1	•	•	•	•	•	•	
Wall Blacket	Heavy Duty Wall Mounting Bracket—316 Series Stainless Steel	QSWBSS	•	•	•	•	•	•	
	15' x 1/4" x 15' / 3/8" Lineset (Twin-Tube Insulation)	MLS143812T-15							
	30' x 1/4" x 30' / 3/8" Lineset (Twin-Tube Insulation)	MLS143812T-30							
	50' x 1/4" x 50' / 3/8" Lineset (Twin-Tube Insulation)	MLS143812T-50			İ				
	65' x 1/4" x 65' / 3/8" Lineset (Twin-Tube Insulation)	MLS143812T-65							
	15' x 1/4" x 15' / 1/2" Lineset (Twin-Tube Insulation)	MLS141212T-15	•	•					
	30' x 1/4" x 30' / 1/2" Lineset (Twin-Tube Insulation)	MLS141212T-30	•	` _					
	50' x 1/4" x 50' / 1/2" Lineset (Twin-Tube Insulation)	MLS141212T-50	•	_ :					
	65' x 1/4" x 65' / 1/2" Lineset (Twin-Tube Insulation)	MLS141212T-65	•	•			-	+	
Lineset	100' x 1/4" x 100' / 1/2" Lineset (Twin-Tube Insulation)		•						
Lineset	100' x 1/4" x 100' / 1/2" Lineset (Twin-Tube Insulation)	MLS141212T-100	-	•	_		_		
		MPLS385812T-10			•	•	•	•	
	15' x 3/8" x 15' x 5/8" Lineset (Twin-Tube Insulation)	MPLS385812T-15	-		•	•	•	•	
	30' x 3/8" x 30' x 5/8" Lineset (Twin-Tube Insulation)	MPLS385812T-30	-		•	•	•	•	
	50' x 3/8" x 50' x 5/8" Lineset (Twin-Tube Insulation)	MPLS385812T-50			•	•	•	•	
	65' x 3/8" x 65' x 5/8" Lineset (Twin-Tube Insulation)	MPLS385812T-65			•	•	•	•	
	100' x 3/8" x 100' x 5/8" Lineset (Twin-Tube Insulation)	MPLS385812T-100			•	•	•	•	
	15' x 3/8" x 15' / 3/4" Lineset (Twin-Tube Insulation)	MPLS383412T-15							
	50' x 3/8" x 50' / 3/4" Lineset (Twin-Tube Insulation)	MPLS383412T-50							

^{*1 2} pieces required, *2 PEAD12/SUZ-KA12NAR1

		PH	Z-A				PHZ	Z-HA	
12NKA7(-BS)	18NKA7(-BS)	24NHA7(-BS)	30NHA7(-BS)	36NKA7(-BS)	42NKA7(-BS)	24NHA	30NHA5	36NHA5	42NKA
		•		•				•	
				•*1	•*1				•*1
•	•								
		•	•	•*1	•*1	•	•	•	-*4
•	•			• 1	• 1				•*1
		•	•			•	•	•	
		•	•	•	•	•	•	•	•
•	•								
				•	•				•
•	•				-		•	•	
		•	•			•			
	_								
•	•	•	•	•	•	•	•	•	•
•	•								
		•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•
				•	•				•
							•	•	_
•	•	•	•			•			
		•	•			•			
•	•								
		•	•	•	•	•	•	•	•
•	•	•	•			•			
•	•	•	•			•			
<u> </u>	•	•	•	•	•	•	•	•	•
				•	•		•	•	•
	_	_	_	•	•		•	•	•
•	•	•	•	•	•	•	•	•	•
						-			
•	•								
•	•								
•	•								
•	•								
•	•	•	•	•	•	•	•	•	•
 		•	•	•	•	•	•	•	•
		•	•	•	•	•	•	•	•
		•	•	•	•	•	•	•	•
		•	-	-					
		•	•	•	•	•	•	•	•

Optional Parts List for Controllers

_												
							Wall Mour	nt				
					WPH				MS	Z-EF		
			06	09	12	15	18	09NAW (B)(S)	12NAW (B)(S)	15NAW (B)(S)	18NAW (B)(S)	
	Wireless Signal Receiver	PAR-SA9CA-E										
	Wireless Signal Receiver	PAR-FA32MA-W										
Wireless	Wireless Signal Receiver	PAR-FA32MA-E										
Wireless Signal Receiver	Wireless Remote Receiver Panel	PAR-SF9FA-E										
	Wireless Remote Receiver Panel	PAR-SR3LA-E										
	Remote Controller Holder	U01A01083										
	Wireless Remote Controller	PAR-SL100A-E										
	Wireless Remote Controller	PAR-FL32MA-E										
Wireless Remote	Controller Kit (Sender & Receiver)	PAR-SL93B-E										
Controller	Controller Kit with i-see Sensor™	PAR-SA92MW-E										
	kumo touch™ Backlit, Wall-mounted, Wireless Controller	MHK2	•	•	•	•	•	•	•	•	•	
	Deluxe MA Remote Controller	AAR-40MAAU	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	
	Simple MA Controller	PAC-YT53CRAU-J	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	
	Touch MA Controller	PAR-CT01MAU-SB	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	
_Wired	Airzone ZBS Wired Blueface Principal Controller White	AZZBSBLUEFACECB										
Wired Remote Controller	Airzone ZBS Wired Think Controller White	AZZBSTHINKCB										
	Airzone ZBS Wireless Think Controller White	AZZBSTHINKRB										
	Airzone ZBS Wired Lite Controller White	AZZBSLITECB										
	Airzone ZBS Wireless Lite Controller White	AZZBSLITERB										
	Wired Remote Sensor	PAC-SE41TS-E										
Remote	Wired Remote Sensor	M21EAA307	•	•	•	•	•	•	•	•	•	
Sensor	Wireless Temperature and Humidity Sensor	PAC-USWHS003-TH-1	•	•	•	•	•	•	•	•	•	
	Flush Mount Remote Temperature Sensor	PAC-USSEN001-FM-1										
	System Control Interface	MAC-3334F-E	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	
	Wireless Interface 2	PAC-USWHS002-WF-2	•	•	•	•	•	•	•	•	•	
	Thermostat Interface	PAC-US444CN-1	•	•	•	•	•	•	•	•	•	
	kumo station®	PAC-WHS01HC-E	•	•	•	•	•	•	•	•	•	
	USNAP Interface	PAC-WHS01UP-E	•	•	•	•	•	•	•	•	•	
	IT Extender	PAC-WHS01IE-E	•	•	•	•	•	•	•	•	•	
lata da a a	BACnet® and MODBUS® Interface	PAC-UKPRC001-CN-1	•	•	•	•	•	•	•	•	•	
Interface	External Fan / Heater Control Relay Adapter	CN24RELAY-KIT-CM3	•	•	•	•	•					
	Wire for Remote on/off with CN32 connector	PAC-715AD										
	Connector and wire for Operation status/error using CN51	PAC-725AD										
	Connector cable for remote display	PAC-SA88HA-EP										
	Connector for CN32 (remote on/off)	PAC-SE55RA-E										
	Lockdown Bracket for Hand-held Remote Controllers	RCMKP1CB	•	•	•	•	•	•	•	•	•	
	Remote Operation Adapter	PAC-SF40RM-E										

^{*1 (}requires MAC-334IF-E),
*2 Unable to use with wireless remote controller
*3 Allows indoor units to connect to an MA controller

												Wall I	Mount												
			WST He	at Pump)				WST	Cooling	Only		WMT	115V		W	EL				WST	Cooling	Only		
06	09				24	30	36	09				24	00	12	00			24	09	12			24	30	26
06	09	12	15	18	24	30	36	09	12	15	18	24	09	12	09	12	18	24	09	12	15	18	24	30	36
								•		•	•	•			•		•	•							
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*
 •*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*
•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•*
								•			•	•		•	•				•	•	•			•	
				•	•	•	•	•	•		•		•	•	•		•	•	•		•	•		•	
•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•*
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
 •	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
 •	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•				•	•	•		•		•	•	•			•	•	•	•			•	•	•		

Optional Parts List for Controllers

				Floor	Mount			EZ FIT™	4	4-\	vay Ceili	ng Cass	ette	
				FI	KS			UKS			C	KS		
			09	12	15	18	09	12	18	09	12	15	18	
	Wireless Signal Receiver	PAR-SA9CA-E												
	Wireless Signal Receiver	PAR-FA32MA-W								•	•	•	•	
Wireless	Wireless Signal Receiver	PAR-FA32MA-E								•	•	•	•	
Wireless Signal Receiver	Wireless Remote Receiver Panel	PAR-SF9FA-E								•	•	•	•	
	Wireless Remote Receiver Panel	PAR-SR3LA-E												
	Remote Controller Holder	U01A01083												
	Wireless Remote Controller	PAR-SL100A-E								•	•	•	•	
	Wireless Remote Controller	PAR-FL32MA-E												
Wireless Remote Controller	Controller Kit (Sender & Receiver)	PAR-SL93B-E												
Controller	Controller Kit with i-see Sensor™	PAR-SA92MW-E												
	kumo touch™ Backlit, Wall-mounted, Wireless Controller	MHK2	•	•	•	•	•	•	•	•	•	•	•	
	Deluxe MA Remote Controller	AAR-40MAAU	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•	•	•	•	
	Simple MA Controller	PAC-YT53CRAU-J	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•	•	•	•	
	Touch MA Controller	PAR-CT01MAU-SB	•*1	•*1	•*1	•*1	•*1	•*1	•*1	•	•	•	•	
Wired	Airzone ZBS Wired Blueface Principal Controller White	AZZBSBLUEFACECB												
Remote Controller	Airzone ZBS Wired Think Controller White	AZZBSTHINKCB												
	Airzone ZBS Wireless Think Controller White	AZZBSTHINKRB												
	Airzone ZBS Wired Lite Controller White	AZZBSLITECB												
	Airzone ZBS Wireless Lite Controller White	AZZBSLITERB												
	Wired Remote Sensor	PAC-SE41TS-E								•	•	•	•	
Remote	Wired Remote Sensor	M21EAA307	•	•	•	•	•	•	•					
Sensor	Wireless Temperature and Humidity Sensor	PAC-USWHS003-TH-1	•		•	•	•	•	•	•	•	•		
	Flush Mount Remote Temperature Sensor	PAC-USSEN001-FM-1								•	•	•	•	
	System Control Interface	MAC-3334F-E	•*3	•*3	•*3	•*3	•*3	•*3	•*3	•	•	•	•	
	Wireless Interface 2	PAC-USWHS002-WF-2	•	•	•	•	•	•	•		•	•	•	
	Thermostat Interface	PAC-US444CN-1	•	•	•	•	•	•	•		•	•	•	
	kumo station®	PAC-WHS01HC-E	•	•	•	•	•	•	•		•	•	•	
	USNAP Interface	PAC-WHS01UP-E	•		•	•	•	•	•	•	•	•		
	IT Extender	PAC-WHS01IE-E	•		•	•	•	•	•	•	•	•		
	BACnet® and MODBUS® Interface	PAC-UKPRC001-CN-1	•	•	•	•	•	•	•		•	•	•	
Interface	External Fan / Heater Control Relay Adapter	CN24RELAY-KIT-CM3	•		•	•	•	•	•	•	•	•		
	Wire for Remote on/off with CN32 connector	PAC-715AD								•	•	•		
	Connector and wire for Operation status/error using CN51	PAC-725AD								•	•	•		
	Connector cable for remote display	PAC-SA88HA-EP								•	•			
	Connector for CN32 (remote on/off)	PAC-SE55RA-E								•	•		•	
	Lockdown Bracket for Hand-held Remote Controllers	RCMKP1CB	•	•	•	•	•	•	•					
	Remote Operation Adapter	PAC-SF40RM-E								•*2	•*2	•*2	•*2	

^{•*1 (}requires MAC-334IF-E),
•*2 Unable to use with wireless remote controller
•*3 Allows indoor units to connect to an MA contoller

I														0.11					
	Horizont	al-ducted			Multi-p	osition Air I	Handler				Wall Moun	t		Ceiling-suspended					
	D	KS				AMT			PKA					PCA-					
09	12	15	18	12	18	24	30	36	A12HA7	A18HA7	A24KA7	A30KA7	A36KA7	A24KA7	A30KA7	A36KA7	A42KA7		
•	•	•	•																
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•														
														•	•	•	•		
														•	•		•		
•	•	•	•	•	•		•	•	•	•	•	•	•	•	•		•		
•	•	•	•	•	•		•	•		•	•	•	•	•	•		•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•		•			•	•	•	•	•	•		•		
	•			•	•	•	•		<u> </u>	-		•	•		_				
				•	•	•	•	•											
				•	•	•	•	•											
				•	•	•	•	•											
				•	•	•	•	•											
 •	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•																
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
 •	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
 •	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•						•	•	•	•		
•	•	•	•																
•	•	•	•																
•	•	•	•	•	•	•	•	•											
•	•	•	•	•	•	•	•	•	•	•	•	•	•						
									•	•	•	•	•	•	•	•	•		
•*2	•*2	•*2	•*2	•*2	•*2	•*2	•*2	•*2											

Optional Parts List for Controllers

_					4-way Ceili	ng Cassette			
					Pl	_A-			
			A12EA7	A18EA7	A24EA7	A30EA7	A36EA7	A42EA7	
	Wireless Signal Receiver	PAR-SA9CA-E							
	Wireless Signal Receiver	PAR-FA32MA-W	•	•	•	•	•	•	
Wireless	Wireless Signal Receiver	PAR-FA32MA-E	•	•	•	•	•	•	
Wireless Signal Receiver	Wireless Remote Receiver Panel	PAR-SF9FA-E							
	Wireless Remote Receiver Panel	PAR-SR3LA-E	•	•	•	•	•	•	
	Remote Controller Holder	U01A01083							
	Wireless Remote Controller	PAR-SL100A-E							
	Wireless Remote Controller	PAR-FL32MA-E							
Wireless Remote Controller	Controller Kit (Sender & Receiver)	PAR-SL93B-E							
Controller	Controller Kit with i-see Sensor™	PAR-SA92MW-E							
	kumo touch™ Backlit, Wall-mounted, Wireless Controller	MHK2	•	•	•	•	•	•	
	Deluxe MA Remote Controller	AAR-40MAAU	•	•	•	•	•	•	
	Simple MA Controller	PAC-YT53CRAU-J	•	•	•	•	•	•	
	Touch MA Controller	PAR-CT01MAU-SB	•	•	•	•	•	•	
Wired	Airzone ZBS Wired Blueface Principal Controller White	AZZBSBLUEFACECB							
Wired Remote Controller	Airzone ZBS Wired Think Controller White	AZZBSTHINKCB							
	Airzone ZBS Wireless Think Controller White	AZZBSTHINKRB							
	Airzone ZBS Wired Lite Controller White	AZZBSLITECB							
	Airzone ZBS Wireless Lite Controller White	AZZBSLITERB							
	Wired Remote Sensor	PAC-SE41TS-E	•	•	•	•	•	•	
Remote	Wired Remote Sensor	M21EAA307							
Sensor	Wireless Temperature and Humidity Sensor	PAC-USWHS003-TH-1	•	•	•	•	•	•	
	Flush Mount Remote Temperature Sensor	PAC-USSEN001-FM-1	•	•	•	•	•	•	
	System Control Interface	MAC-3334F-E							
	Wireless Interface 2	PAC-USWHS002-WF-2	•	•	•	•	•	•	
	Thermostat Interface	PAC-US444CN-1	•	•	•	•	•	•	
	kumo station®	PAC-WHS01HC-E	•	•	•	•	•	•	
	USNAP Interface	PAC-WHS01UP-E	•	•	•	•	•	•	
	IT Extender	PAC-WHS01IE-E	•	•	•	•	•	•	
	BACnet® and MODBUS® Interface	PAC-UKPRC001-CN-1	•	•	•	•	•	•	
Interface	External Fan / Heater Control Relay Adapter	CN24RELAY-KIT-CM3	•	•	•	•	•	•	
	Wire for Remote on/off with CN32 connector	PAC-715AD							
	Connector and wire for Operation status/error using CN51	PAC-725AD							
	Connector cable for remote display	PAC-SA88HA-EP							
	Connector for CN32 (remote on/off)	PAC-SE55RA-E	•	•	•	•	•	•	
	Lockdown Bracket for Hand-held Remote Controllers	RCMKP1CB	•	•	•	•	•	•	
	Remote Operation Adapter	PAC-SF40RM-E	•*2	•*2	•*2	•*2	•*2	•*2	


^{•*1 (}requires MAC-334IF-E),
•*2 Unable to use with wireless remote controller
•*3 Allows indoor units to connect to an MA controller

			Ceiling-	conceald				Multi-position Air Handler							
			PE	AD-						P\	/A-				
A09AA7	A12AA7	A15AA7	A18AA7	A24AA7	A30AA7	A36AA7	A42AA7	A12AA7	A18AA7	A24AA7	A30AA7	A36AA7	A42AA7		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
			•	•	•	•	•		•						
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
 •	•	•	•	•	•	•	•	•	•	•	•	•	•		
 •	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
 •	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•		•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	•	•	•	•	•	•								
•*2	•*2	•*2	•*2	•*2	•*2	•*2	•*2	•*2	•*2	•*2	•*2	•*2	•*2		

Additional Nv-Series Information

Port Adapters Parts Numbers

Model Name	Diameter A	Diameter B
MAC-A454JP-E	3/8"	1/2"
MAC-A455JP-E	1/2"	3/8"
MAC-A456JP-E	1/2"	5/8"
PAC-SG76RJ-E	3/8"	5/8"
ADP5834	5/8"	3/4"
PAC-493PI	1/4"	3/8"

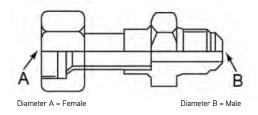

Multi-zone Efficiency Ratings

Model	Configuration	SEER	EER	HSPF
	Ducted	16.00	10.00	9.30
NAXMMX20A122A*	Mixed	18.00	11.35	9.65
	Non-Ducted	20.00	12.70	10.00
	Ducted	16.00	11.20	9.20
NAXMMX24A132A*	Mixed	18.00	12.40	9.50
	Non-Ducted	20.00	13.60	9.80
	Ducted	16.20	9.60	9.60
NAXMMX30A132A*	Mixed	17.60	10.10	10.10
	Non-Ducted	19.00	10.60	10.60
	Ducted	16.00	8.70	9.80
NAXMMX36A142A*	Mixed	17.60	9.05	10.40
	Non-Ducted	19.20	9.40	11.00
	Ducted	15.20	9.00	9.10
NAXMMX42A152A*	Mixed	17.45	9.10	9.70
	Non-Ducted	19.70	9.20	10.30
	Ducted	18.90	12.00	11.40
NAXMMX48A182A*	Mixed	16.80	10.75	10.75
	Non-Ducted	14.70	9.50	10.10
	Ducted	15.10	9.60	10.00
NAXMMX60A182A*	Mixed	16.25	11.05	10.25
	Non-Ducted	17.40	12.50	10.50
	Ducted	15.00	11.00	9.50
NAXMPH20A122A*	Mixed	16.00	12.25	9.65
	Non-Ducted	17.00	13.50	9.80
	Ducted	15.50	10.00	9.00
NAXMPH24A132A*	Mixed	17.25	11.75	9.50
	Non-Ducted	19.00	13.50	10.00
	Ducted	16.00	10.30	9.80
NAXMPH30A132A*	Mixed	17.00	11.40	10.40
	Non-Ducted	18.00	12.50	11.00
	Ducted	15.80	11.30	10.10
NAXMPH36A142A*	Mixed	17.45	12.65	10.70
	Non-Ducted	19.10	14.00	11.30
	Ducted	15.00	10.80	10.10
NAXMPH42A152A*	Mixed	17.00	12.10	10.55
	Non-Ducted	19.00	13.40	11.00
	Ducted	14.70	9.50	10.00
NAXMMX48A182A*	Mixed	16.80	10.75	10.50
	Non-Ducted	18.90	12.00	11.00

Model	Mode	Function	Airflow (CFM)	Coverage (FT)
NAXWPH06A112A*, NAXWPH09A112A*	HEAT	DRY	437	29.8
NAXVERUOATIZA , NAXVERUO9ATIZA	COOL	WET	328	22.5
NAXWPH12A112A*	HEAT	DRY	454	31.0
(1) (1) (1) (1) (1) (1) (1) (1) (1) (1)	COOL	WET	342	23.5
NAXWPH15A112A*	HEAT	DRY	497	33.8
	COOL	WET	354	24.1
NAXWPH18A112A*	HEAT	DRY	514	34.9
	COOL	WET DRY	395 406	27.0 29.5
NAXWST06/09/12A112A*, NAYWST06/09/12A112A*	COOL	WET	286	21.0
	HEAT	DRY	463	33.5
NAXWST15A112A*, NAYWST15A112A*	COOL	WET	385	28.0
	HEAT	DRY	646	44.0
NAXWST18A112A*, NAYWST18A112A*	COOL	WET	581	39.7
NAXWST24A112A*, NAYWST24A112A*	HEAT	DRY	738	36.9
NAWO124A112A , NAI WO124A112A	COOL	WET	661	33.2
NAXWST30/36A112A*, NAYWST30/36A112A*	HEAT	DRY	848	45.0
,	COOL	WET	763	40.7
NAXFKS09A112A*, NAXFKS12A112A*	HEAT	DRY	417	29.6
	COOL	WET	354	25.3
NAXFKS15A112A*	HEAT	DRY WET	470 366	33.3 26.2
	HEAT	DRY	470	33.3
NAXFKS18A112A*	COOL	WET	417	29.7
	HEAT	DRY	300	15.1
NAXCKS09A112A*	COOL	WET	270	13.7
	HEAT	DRY	336	16.9
NAXCKS12A112A*	COOL	WET	302	15.2
NAXCKS15A112A*	HEAT	DRY	405	20.3
VAXONO IDATIZA	COOL	WET	365	18.3
NAXCKS18A112A*	HEAT	DRY	475	23.7
	COOL	WET	429	21.4
MSZ-EF09NAW(B)(S)	HEAT	DRY	420	29.2
· · · · ·	COOL	WET	319	22.3
MSZ-EF12NAW(B)(S)	HEAT	DRY	448	31.1
	COOL	WET	319 448	22.3 31.1
MSZ-EF15NAW(B)(S)	COOL	WET	313	21.9
	HEAT	DRY	466	32.3
MSZ-EF18NAW(B)(S)	COOL	WET	334	23.4
	HEAT	DRY	406	29.5
NAXWMT09A112A*, NAXWMT12A112A*	COOL	WET	286	21.0
NIA VIAIAT1EA 112A*	HEAT	DRY	463	33.5
NAXWMT15A112A*	COOL	WET	385	28.0
NAXWMT18A112A*	HEAT	DRY	625	42.6
	COOL	WET	562	38.4
NAXWMT24A112A*	HEAT	DRY	702	47.7
	COOL	WET	632	43.1
NAXWMT09A111A*	HEAT	DRY	406	29.5
	COOL	WET	364 406	26.5 29.5
NAXWMT12A111A*	COOL	WET	364	29.5
	HEAT	DRY	406	29.5
NAXWEL09A112A*	COOL	WET	286	21.0
	HEAT	DRY	406	29.5
NAXWEL12A112A*	COOL	WET	286	21.0
IANIAITI 4004400+	HEAT	DRY	625	42.6
NAXWEL18A112A*	COOL	WET	562	38.4
NAXWEL24A112A*	HEAT	DRY	702	47.7
VVVIILLE ZANTIZA	COOL	WET	632	43.1
NAXUKS09A112A*	HEAT	DRY	311	20.7
S S C C C C C C C C C C C C C C C C C C	COOL	WET	325	21.7
NAXUKS12A112A*	HEAT	DRY	332	22.1
	COOL	WET	350	23.3
NAXUKS18A112A*	HEAT	DRY WET	403	26.7
	COOL		417	27.6

Heating Capacity

Outdoor Temperatur	pacity The Degrees (° F)	50	41.0	32.0	23.0	14.0	5.0	-4	-13
•	Heating Capacity (Btu/h)	8,700	8,700	8,700	8,700	8,700	8,700	7,650	6,430
NAXWPH06A112A*/NAXSPH06A112A*			100%	100%			100%	88%	74%
	Percentage of Rated Capacity	100%			100%	100%			
NAXWPH09A112A*/NAXSPH09A112A*	Heating Capacity (Btu/h)	10,900	10,900	10,900	10,900	10,900	10,900	9,260	7,630
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	85%	70%
NAXWPH12NA/NAXSPH12A112A*	Heating Capacity (Btu/h)	13,600	13,600	13,600	13,600	13,600	13,600	11,690	9,920
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	73%
NAXWPH15A112A*/NAXSPH15A112A*	Heating Capacity (Btu/h)	18,000	18,000	18,000	18,000	18,000	18,000	16,200	14,580
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	90%	81%
NAXWPH18A112A*/MUZ-FH18NA2	Heating Capacity (Btu/h)	20,300	20,300	20,300	20,300	20,300	20,300	17,250	14,210
NAXWPHIOATIZA /WUZ-FHIONAZ	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	85%	70%
	Heating Capacity (Btu/h)	8,700	8,700	8,700	8,700	8,700	8,700	7,650	6,430
NAXWPH06A112A*/NAXSPB06A112A*	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	88%	74%
	Heating Capacity (Btu/h)	10,900	10,900	10,900	10,900	10,900	10,900	9,370	7,950
NAXWPH09A112A*/NAXSPB09A112A*	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	73%
			13,600				13,600		9,920
NAXWPH12NA/NAXSPB12A112A*	Heating Capacity (Btu/h)	13,600		13,600	13,600	13,600		11,690	
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	73%
NAXWPH15A112A*/NAXSPB15A112A*	Heating Capacity (Btu/h)	18,000	18,000	18,000	18,000	18,000	18,000	16,200	14,580
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	90%	81%
NAXWPH18A112A*/MUZ-FH18NA2H	Heating Capacity (Btu/h)	20,300	20,300	20,300	20,300	20,300	20,300	17,250	14,210
NAXWETTOATTZA /WOZ-FITTONAZIT	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	85%	70%
	Heating Capacity (Btu/h)	10,900	10,900	10,900	10,460	9,480	8,170	6,860	-
NAXWST09A112A*/NAXSST09A112A*	Percentage of Rated Capacity	100%	100%	100%	96%	87%	75%	63%	0%
	Heating Capacity (Btu/h)	14,400	14,400	14,110	12,960	11,660	9,790	7,920	-
NAXWST12A112A*/NAXSST12A112A*	Percentage of Rated Capacity	100%	100%	98%	90%	81%	68%	55%	0%
		18,000	17,100	16,920	16,920	16,200	13,680	11,160	070
NAXWST15A112A*/NAXSST15A112A*	Heating Capacity (Btu/h)								00/
	Percentage of Rated Capacity	100%	95%	94%	94%	90%	76%	62%	0%
NAXWST18A112A*/NAXSST18A112A*	Heating Capacity (Btu/h)	21,600	21,600	21,600	19,440	17,060	14,900	12,520	-
	Percentage of Rated Capacity	100%	100%	100%	90%	79%	69%	58%	0%
NAXWST24A112A*/NAXSST24A112A*	Heating Capacity (Btu/h)	27,600	27,600	27,600	26,220	23,460	19,320	15,450	-
WWW.TZ#XTIZIXTWW.GGTZ#XTIZX	Percentage of Rated Capacity	100%	100%	100%	95%	85%	70%	56%	0%
NIA VANATAO A 440 A+/A IA VONTOO A 440 A+	Heating Capacity (Btu/h)	10,900	10,570	9,480	8,500	7,300	5,990	4,680	-
NAXWMT09A112A*/NAXSMT09A112A*	Percentage of Rated Capacity	100%	97%	87%	78%	67%	55%	43%	0%
	Heating Capacity (Btu/h)	12,200	12,200	11,220	10,120	9,020	7,440	5,850	-
NAXWMT12A112A*/NAXSMT12A112A*	Percentage of Rated Capacity	100%	100%	92%	83%	74%	61%	48%	0%
	Heating Capacity (Btu/h)	18,000	15,300	14,940	14,400	13,680	12,240	10,620	_
NAXWMT15A112A*/NAXSMT15A112A*		100%	85%	83%	80%	76%	68%	59%	0%
	Percentage of Rated Capacity								076
NAXWMT18A112A*/NAXSMT18A112A*	Heating Capacity (Btu/h)	18,000	18,000	18,000	16,560	14,580	12,780	10,980	-
	Percentage of Rated Capacity	100%	100%	100%	92%	81%	71%	61%	0%
NAXWMT24A112A*/NAXSMT24A112A*	Heating Capacity (Btu/h)	26,000	24,440	22,360	20,020	17,680	15,600	13,260	-
	Percentage of Rated Capacity	100%	94%	86%	77%	68%	60%	51%	0%
NIA VINICTONA 440A*/NIA VCCTONA 440A*	Heating Capacity (Btu/h)	32,600	28,030	25,420	22,820	19,880	-	-	-
NAXWST30A112A*/NAXSST30A112A*	Percentage of Rated Capacity	100%	86%	78%	70%	61%	0%	0%	0%
	Heating Capacity (Btu/h)	35,200	29,560	27,450	25,340	22,880	-	-	-
NAXWST36A112A*/NAXSST36A112A*	Percentage of Rated Capacity	100%	84%	78%	72%	65%	0%	0%	0%
	Heating Capacity (Btu/h)	10,900	10,570	9,480	8,500	7,300	5,990	4,680	-
NAXWMT09A111A*/NAXSMT09A111A*	Percentage of Rated Capacity	100%	97%	87%	78%	67%	55%	43%	0%
	Heating Capacity (Btu/h)	12,200	12,200	11,220	10,120	9,020	7,440	5,850	
NAXWMT12A111A*/NAXSMT12A111A*									00/
	Percentage of Rated Capacity	100%	100%	92%	83%	74%	61%	48%	0%
NAXWEL09A112A*/NAXSEL09A112A*	Heating Capacity (Btu/h)	10,900	10,570	9,480	8,500	7,300	5,990	-	-
	Percentage of Rated Capacity	100%	97%	87%	78%	67%	55%	0%	0%
NAXWEL12A112A*/NAXSEL12A112A*	Heating Capacity (Btu/h)	12,200	12,200	11,220	10,120	9,020	7,440	-	-
	Percentage of Rated Capacity	100%	100%	92%	83%	74%	61%	0%	0%
	Heating Capacity (Btu/h)	18,000	18,000	18,000	16,560	14,580	12,780	-	-
NAXWEL18A112A*/NAXSEL18A112A*	Percentage of Rated Capacity	100%	100%	100%	92%	81%	71%	0%	0%
	Heating Capacity (Btu/h)	26,000	24,440	22,360	20,020	17,680	15,600	-	-
NAXWEL24A112A*/NAXSEL24A112A*	Percentage of Rated Capacity	100%	94%	86%	77%	68%	60%	0%	0%
NAXFKS09A112A*/NAXSPF09A112A*	Heating Capacity (Btu/h)	11,000	11,000	11,000	11,000	11,000	11,000	9,130	7,260
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	83%	66%

Heating Capacity

Outdoor Temperatu	re Degrees (° F)	50	41.0	32.0	23.0	14.0	5.0	-4	-13
	Heating Capacity (Btu/h)	13,000	13,000	13,000	13,000	13,000	13,000	10,790	8,450
NAXFKS12A112A*/NAXSPF12A112A*	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	83%	65%
	Heating Capacity (Btu/h)	18,000	18,000	18,000	18,000	18,000	18,000	14,940	13,860
NAXFKS15A112A*/NAXSPF15A112A*	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	83%	77%
	Heating Capacity (Btu/h)	21,000	21,000	21,000	21,000	21,000	21,000	18,480	15,960
NAXFKS18A112A*/NAXSPF18A112A*	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	88%	76%
	Heating Capacity (Btu/h)	12,000	10,620	9,230	7,840	6,450	5,090	3,770	
NAXUKS09A112A*/NAXSKS09A112A*	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
	Heating Capacity (Btu/h)	15,400	13,630	11,850	10,060	8,280	6,540	4,840	
NAXUKS12A112A*/NAXSKS12A112A*	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
	Heating Capacity (Btu/h)	20,000	17,700	15,390	13,060	10,760	8,490	6,290	
NAXUKS18A112A*/NAXSKS18A112A*		100%	89%	77%	65%	54%	42%	31%	0%
	Percentage of Rated Capacity								U%
NAXCKS09A112A*/NAXSKS09A112A*	Heating Capacity (Btu/h)	11,000	9,730	8,460	7,180	5,920	4,670	3,460	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
NAXCKS12A112A*/NAXSKS12A112A*	Heating Capacity (Btu/h)	13,000	11,510	10,000	8,490	6,990	5,520	4,080	
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
NAXCKS15A112A*/NAXSKS15A112A*	Heating Capacity (Btu/h)	18,000	15,930	13,850	11,760	9,680	7,640	5,660	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
JAXCKS18A112A*/NAXSKS18A112A*	Heating Capacity (Btu/h)	19,700	17,440	15,150	12,870	10,600	8,370	6,190	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
NAXDKS09A112A*/NAXSKS09A112A*	Heating Capacity (Btu/h)	12,000	10,620	9,230	7,840	6,450	5,090	3,770	-
ANDROUGHTIZA MANGROUGHTIZA	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
JAXDKS12A112A*/NAXSKS12A112A*	Heating Capacity (Btu/h)	15,000	13,280	11,540	9,800	8,070	6,370	4,710	-
NAXUNS IZATIZA /NAXSNS IZATIZA	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
	Heating Capacity (Btu/h)	18,000	15,930	13,850	11,760	9,680	7,640	5,660	-
IAXDKS15A112A*/NAXSKS15A112A*	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
	Heating Capacity (Btu/h)	21,600	19,120	16,620	14,110	11,620	9,170	6,790	-
IAXDKS18A112A*/NAXSKS18A112A*	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
	Heating Capacity (Btu/h)	12,000	10,620	9,230	7,840	6,450	5,090	3,770	-
PEAD-A09AA7/NAXSKS09A112A*	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
	Heating Capacity (Btu/h)	15,000	13,280	11,540	9,800	8,070	6,370	4,710	
PEAD-A12AA7/NAXSKS12A112A*	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
	Heating Capacity (Btu/h)	18,000	15,930	13,850	11,760	9,680	7,640	5,660	0,0
PEAD-A15AA7/NAXSKS15A112A*									- 00/
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
PEAD-A18AA7/NAXSKS18A112A*	Heating Capacity (Btu/h)	21,600	19,120	16,620	14,110	11,620	9,170	6,790	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
PEAD-A24AA7/NAXSKS24A112A*	Heating Capacity (Btu/h)	25,000	22,130	19,230	16,330	13,450	-	-	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	0%	0%	0%
PEAD-A30AA7/NAXSKS30A112A*	Heating Capacity (Btu/h)	30,000	26,560	23,080	19,600	16,140	-	-	-
	Percentage of Rated Capacity	100%	89%	77%	65%	54%	0%	0%	0%
PEAD-A36AA7/NAXSKS36A112A*	Heating Capacity (Btu/h)	33,500	29,660	25,770	21,890	18,030	-	-	-
ETE / TOUR WITH WHO IT COUNTY I ET	Percentage of Rated Capacity	100%	89%	77%	65%	54%	0%	0%	0%
NAXAMT12A112A*/NAXSKS12A112A*	Heating Capacity (Btu/h)	15,000	13,280	11,540	9,800	8,070	6,370	4,710	-
ANAMI IZATIZA MANGKOTZATIZA	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
IAVANIT10A110A**NIAVOVO40A14C**	Heating Capacity (Btu/h)	21,600	19,120	16,620	14,110	11,620	9,170	6,790	-
IAXAMT18A112A*/NAXSKS18A112A*	Percentage of Rated Capacity	100%	89%	77%	65%	54%	42%	31%	0%
	Heating Capacity (Btu/h)	25,000	22,130	19,230	16,330	13,450	-	-	-
IAXAMT24A112A*/NAXSKS24A112A*	Percentage of Rated Capacity	100%	89%	77%	65%	54%	0%	0%	0%
	Heating Capacity (Btu/h)	30,000	26,560	23,080	19,600	16,140	-	-	-
AXAMT30A112A*/NAXSKS36A112A*	Percentage of Rated Capacity	100%	89%	77%	65%	54%	0%	0%	0%
	Heating Capacity (Btu/h)	33,500	29,660	25,770	21,890	18,030	-	-	-
AXAMT36A112A*/NAXSKS36A112A*	Percentage of Rated Capacity	100%	89%	77%	65%	54%	0%	0%	0%
								-	
AXMMX20A122A*	Heating Capacity (Btu/h)	22,000	22,000	18,920	15,840	12,980	9,900		- 00/
	Percentage of Rated Capacity	100%	100%	86%	72%	59%	45%	0%	0%
IAXMMX24A132A*	Heating Capacity (Btu/h)	25,000	25,000	24,000	20,750	17,250	13,250	-	-
	Percentage of Rated Capacity	100%	100%	96%	83%	69%	53%	0%	0%
IAXMMX30A132A*	Heating Capacity (Btu/h)	28,600	28,600	28,020	24,310	20,300	15,730	-	-
	Percentage of Rated Capacity	100%	100%	98%	85%	71%	55%	0%	0%

Heating Capacity

Outdoor Temperatu	re Degrees (° F)	50	41.0	32.0	23.0	14.0	5.0	-4	-13
	Heating Capacity (Btu/h)	36,000	36,000	33,480	29,160	24,120	18,720	-	-
NAXMMX36A142A*	Percentage of Rated Capacity	100%	100%	93%	81%	67%	52%	0%	0%
	Heating Capacity (Btu/h)	45,000	45,000	41,850	36,450	30,150	23,400	-	-
NAXMMX42A152A*	Percentage of Rated Capacity	100%	100%	93%	81%	67%	52%	0%	0%
	Heating Capacity (Btu/h)	54,000	54,000	52,920	44,820	36,180	32,400	28,620	-
NAXMMX48A182A*	Percentage of Rated Capacity	100%	100%	98%	83%	67%	60%	53%	0%
	Heating Capacity (Btu/h)	66,000	66,000	66,000	56,100	44,880	39,600	34,320	29,040
NAXMMX60A182A*	Percentage of Rated Capacity	100%	100%	100%	85%	68%	60%	52%	44%
	Heating Capacity (Btu/h)	22,000	22,000	22,000	22,000	22,000	22,000	21,120	20,460
NAXMPH20A122A*	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	96%	93%
	Heating Capacity (Btu/h)	25,000	25,000	25,000	25,000	25,000	25,000	23,750	22,500
NAXMPH24A132A*	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	95%	90%
	Heating Capacity (Btu/h)	28,600	28,600	28,600	28,600	28,600	28,600	26,880	25,160
NAXMPH30A132A*	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	94%	88%
		45,000	45,000	45,000	45,000	45,000	45,000	39,600	33,750
NAXMPH36A142A*	Heating Capacity (Btu/h)								
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	88%	75%
JAXMPH42A152A*	Heating Capacity (Btu/h)	48,000	48,000	48,000	48,000	48,000	48,000	42,240	36,000
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	88%	75%
NAXMPH48A182B*	Heating Capacity (Btu/h)	54,000	54,000	54,000	54,000	54,000	54,000	47,520	40,500
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	88%	75%
NAXUKS09A112A*/NAXSKH09A112A*	Heating Capacity (Btu/h)	12,000	12,000	12,000	12,000	12,000	12,000	10,320	9,120
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	76%
IAXUKS12A112A*/NAXSKH12A112A*	Heating Capacity (Btu/h)	15,000	15,000	15,000	15,000	15,000	15,000	12,900	11,400
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	76%
IAXUKS18A112A*/NAXSKH18A112A*	Heating Capacity (Btu/h)	18,600	18,600	18,600	18,600	18,600	18,600	15,996	14,136
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	76%
JAXCKS09A112A*/NAXSKH09A112A*	Heating Capacity (Btu/h)	11,000	11,000	11,000	11,000	11,000	11,000	9,460	8,360
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	76%
NAXCKS12A112A*/NAXSKH12A112A*	Heating Capacity (Btu/h)	13,800	13,800	13,800	13,800	13,800	13,800	11,868	10,488
V V C C C C C C C C C C C C C C C C C C	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	76%
IAXCKS15A112A*/NAXSKH15A112A*	Heating Capacity (Btu/h)	16,400	16,400	16,400	16,400	16,400	16,400	14,104	12,464
NAXORO IDA 112A MAXORI II DA 112A	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	76%
IA VC/C40 A 442 A */NIA VC/CI14 0 A 442 A *	Heating Capacity (Btu/h)	18,800	18,800	18,800	18,800	18,800	18,800	16,168	14,288
NAXCKS18A112A*/NAXSKH18A112A*	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	76%
	Heating Capacity (Btu/h)	12,500	12,500	12,500	12,500	12,500	12,500	10,750	9,500
NAXDKS09A112A*/NAXSKH09A112A*	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	76%
	Heating Capacity (Btu/h)	15,000	15,000	15,000	15,000	15,000	15,000	12,900	11,400
IAXDKS12A112A*/NAXSKH12A112A*	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	76%
	Heating Capacity (Btu/h)	18,000	18,000	18,000	18,000	18,000	18,000	15,480	13,680
IAXDKS15A112A*/NAXSKH15A112A*	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	76%
	Heating Capacity (Btu/h)	21,600	21,600	21,600	21,600	21,600	21,600	18,576	16,416
IAXDKS18A112A*/NAXSKH18A112A*	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	76%
	Heating Capacity (Btu/h)	12,000	12,000	12,000	12,000	12,000	12,000	10,320	9,120
PEAD-A09AA7/NAXSKH09A112A*	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	76%
	Heating Capacity (Btu/h)	15,000	15,000	15,000	15,000	15,000	15,000	12,900	11,400
EAD-A12AA7/NAXSKH12A112A*	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	76%
	Heating Capacity (Btu/h)	18,000	18,000	18,000	18,000	18,000	18,000	15,480	13,680
EAD-A15AA7/NAXSKH15A112A*	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	76%
		21,600	21,600	21,600	21,600	21,600	21,600	18,576	16,416
EAD-A18AA7/NAXSKH18A112A*	Heating Capacity (Btu/h)								
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	76%
IAXAMT12A112A*/NAXSKH12A112A*	Heating Capacity (Btu/h)	15,000	15,000	15,000	15,000	15,000	15,000	12,900	11,400
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	76%
NAXAMT18A112A*/NAXSKH18A112A*	Heating Capacity (Btu/h)	21,600	21,600	21,600	21,600	21,600	21,600	18,576	16,416
	Percentage of Rated Capacity	100%	100%	100%	100%	100%	100%	86%	76%



Additional P-Series Information


Outlet Air Speed and Coverage Range*


Model	AIRFLOW (CFM)	AIR SPEED (FT/SEC)	COVERAGE RANGE (FT)
PLA-A12EA7	530	7.8	13
PLA-A18EA7	600	8.8	14
PLA-A24EA7	810	11.9	19
PLA-A30EA7	880	12.9	21
PLA-A36EA7	1200	17.6	28
PLA-A42EA7	1200	17.6	28
PKA-A12HA7	425	20.0	35
PKA-A18HA7	425	20.0	35
PKA-A24KA7	775	19.7	47
PKA-A30KA7	775	19.7	47
PKA-A36KA7	920	22.3	53
PCA-A24KA7	670	10.2	32
PCA-A30KA7	705	10.5	33
PCA-A36KA7	990	11.8	41
PCA-A42KA7	1,025	12.1	42


^{*}Air coverage represents the distance with 0.8 ft/sec air speed when blowing out horizontally from the unit operating at the high fan speed. This is a general guideline; actual coverage depends on size and layout of the room.





Correction Factors:

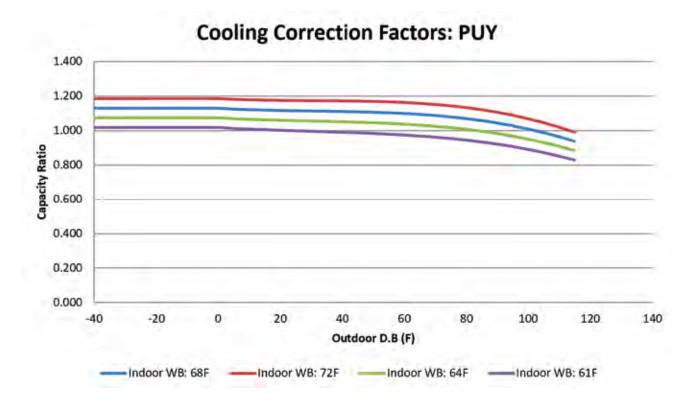

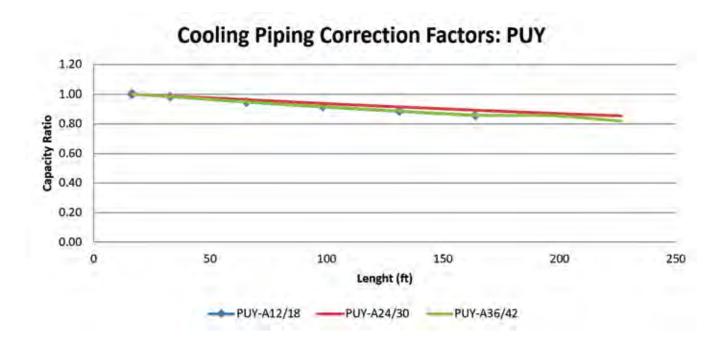


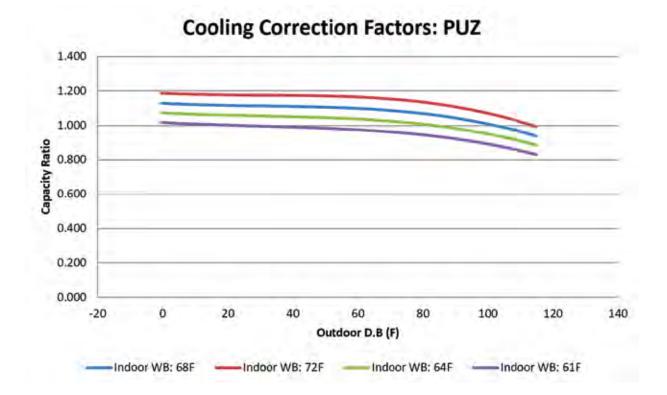





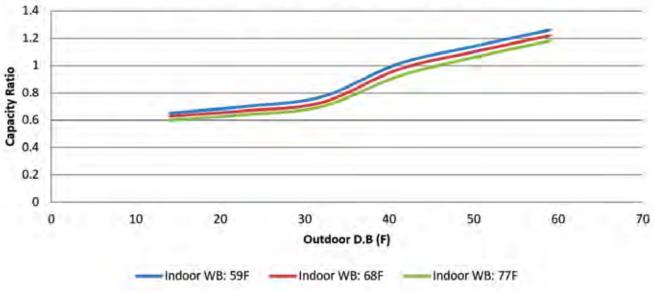


Correction Factors:




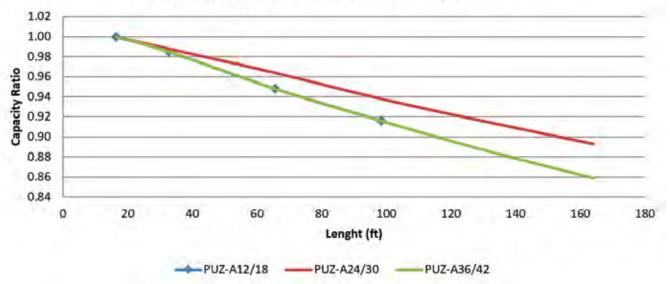



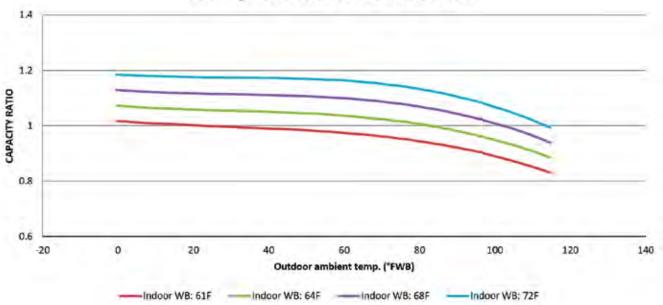


Heating Corrcetion Factors: PUZ-HA

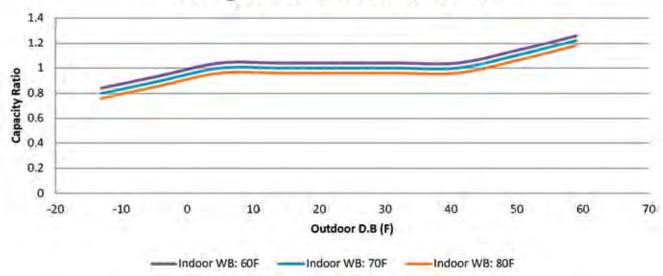


External Dimensions: Nv-Series

NAXWPH06A112AA, NAXWPH09A112AA, NAXWPH12A112AA, NAXWPH15A112AA, NAXWPH18A112AA, NAXWPH18A112AA INDOOR UNIT

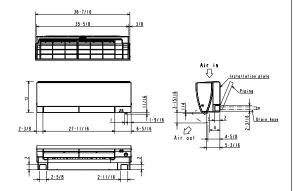

 $\begin{array}{ll} {\sf MSZ\text{-}EF09NA(W)(B)(S)} & {\sf MSZ\text{-}EF12NA(W)(B)(S)} \\ {\sf MSZ\text{-}EF15NA(W)(B)(S)} & {\sf MSZ\text{-}EF18NA(W)(B)(S)} \end{array}$


INDOOR UNIT

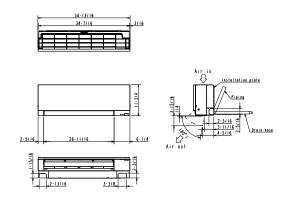

Unit: inch


NAXWST06A112AA NA(X/Y)WST09A112A* NA(X/Y)WST12A112A* NA(X/Y)WST15A112A*

INDOOR UNIT

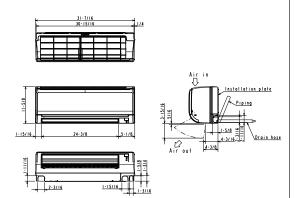


NAXWST18A112AA NAYWST18A112AA INDOOR UNIT


INDOOR UNIT

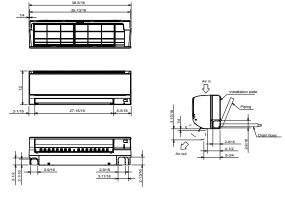

Unit: inch NA(X/Y)WST24A112A* NA(X/Y)WST(30/36)A112A* **INDOOR UNIT INDOOR UNIT** ∠ Air out NAXWMT18A112A* NAXWEL18A112A* NAXWMT24A112A* NAXWEL24A112A* NAXWEL09A112A* NAXWMT09A112A* NAXWMT09A111A* NAXWMT12A112A* NAXWMT12A111A* NAXWEL12A112A* NAXWMT15A112A* INDOOR UNIT INDOOR UNIT

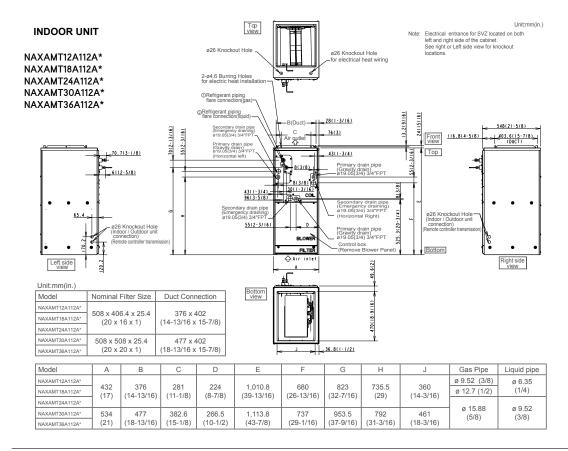


NAXUKS09A112A* NAXUKS12A112A* NAXUKS18A112A* INDOOR UNIT

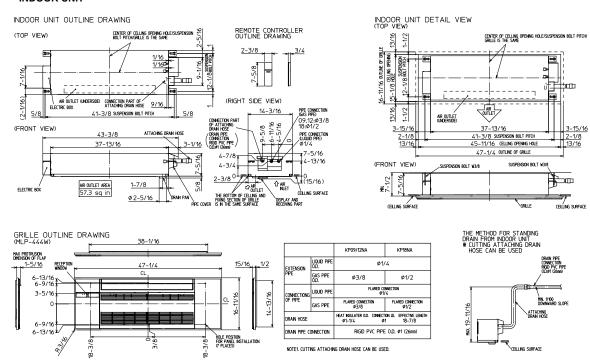

NAXFKS09A112A* NAXFKS12A112A* NAXFKS15A112A* NAXFKS18A112A*


INDOOR UNIT

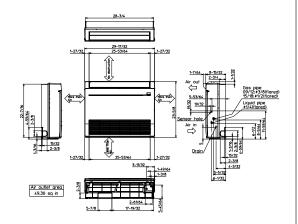

NAXSPH06A112A* NAXSST09A112A* NAXSPB06A112A* NAXSST12A112A* NAXSMT09A111A* NAXSST15A112A* NAXSMT12A111A* NAXSPH09A112A* NAYSST(09/12/15)A112A* NAXSPB09A112A* NAXSEL09A112A* NAXSPH12A112A* NAXSEL12A112A* NAYSST(12/15)A112A* NAXSEL18A112A* NAXSMT09A112A* NAXSMT12A112A*

Unit: inch

NAXSPF09A112A* NAXSPF12A112A*

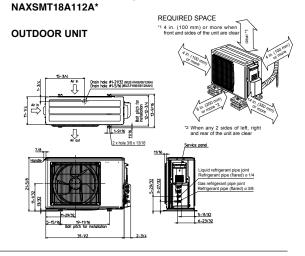


NAXSP(H/B)(15/18)A112A* NAXSPH18A112AA NAXSST18A112AA NAXSMT24A112AA NAXSPF15A112AA NAXSPB18A112AA NAXSEL24A112AA NAXSST18A112AA NAXSPF18A112AA


NA(X/Y)WST(30/36)A112A*

NAXSMT15A112A*

OUTDOOR UNIT

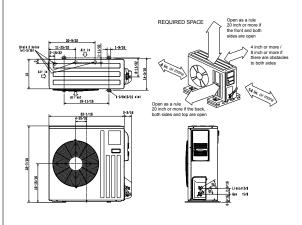


OUTDOOR UNIT

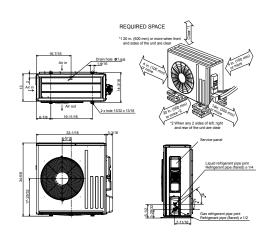


Unit: inch/cm

NAXCKS09A112AA NAXCKS12A112AA NAXCKS15A112AA NAXCKS18A112AA

INDOOR UNIT

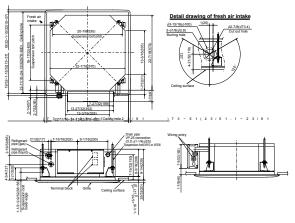




Models	Refrigerent pipe (liquid)	Refrigerent pipe (gas)
NAXCKS09A112AA	1/4 inch (φ 6.35mm) flared connection	3/8 inch (φ 9.52mm) flared connection
NAXCKS12A112AA	1/4 inch (\$ 6.35mm) flared connection	3/8 inch (ø 9.52mm) flared connection
NAXCKS15A112AA	1/4 inch (¢ 6.35mm) flared connection	1/2 inch (¢ 12.7mm) flared connection

NAXDKS09A112AA NAXDKS12A112AA NAXDKS15A112AA NAXDKS18A112AA

INDOOR UNIT

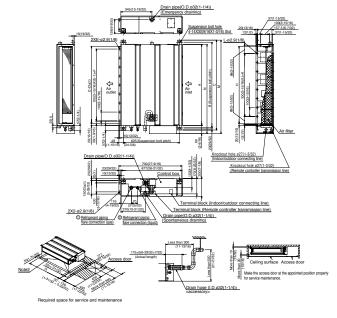


Model	A	В	С	D	ш	F	G	Н	7	K	L	M	N	① Gas pipe	②Liquid pipe
DKS09	27:00 (27:016)	752	798	660 (26)	7	600 (2008)	800	660 (26)	5	500	16	839	790 (31-18)	o9.52(3/8)	o6.35(1/4)
DKS12	900	952	998	860	9	80Q	1000	860	_	,700 (27 878)	20	1039	990	89.52(3/8)	
DKS15	(55-7116)	(27.12)	(39-5/18)	(33-7/8)	9	(5172)	(9536)	(878)	7	(27-8/16)	20	402522	(39)		
DKS18	1100	1152 (638)	1198	1060	11	1000	1200	1060	9	900	24	1239	1190	012.7(1/2)	

NAXDKS09A112A*,12A112A* models have 2 fans.
NAXDKS18A112A* models have 4 fans.
4.In case an inlet duct is used,remove the air filter (supply with the unit), then install the filter (fall expole) at surface order.


Unit: inch NAXSKS09A112A* NAXSKS18A112A* NAXSKH09A112A* NAXSKS12A112A* **OUTDOOR UNIT** NAXSKS24A112A* NAXSKH12A112A* **OUTDOOR UNIT** NAXSKS15A112A* NAXSKS30A112A* NAXSKH15A112A* NAXSKS36A112A* NAXSKH18A112A* REQUIRED SPACE REQUIRED SPACE *1 4 in. (100 mm) or more when front and sides of the unit are clear Drain hole \$1-21/32 (KA09/12/15NA) Drain hole \$1-5/16 (KA09/12/15NAH) *2 When any 2 sides of left, right and rear of the unit are clear 1-9/16 Air out 2-holes 3/8×13/16 Service panel 4-5/16 Refrigerant μιμο (για...)
Gas refrigerant pipe (flared) Ø 3/8 (KA09/12)
Ø 1/2 (KA15) 6-23/32 19-11/16 Bolt pitch for installation 31-1/2 2-3/4

External Dimensions: P-Series


PLA-A12EA7 PLA-A36EA7 PLA-A36EA7 PLA-A42EA7 INDOOR UNIT ***ASC ***CHARGE CONTROL OF THE PLANS O

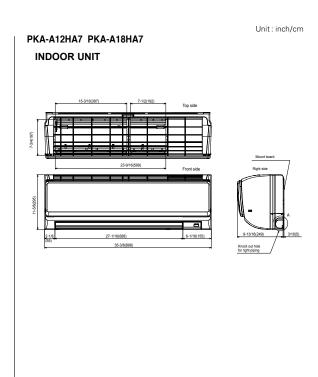

PKA-A24KA7 PKA-A30KA7 PKA-A36KA7 INDOOR UNIT

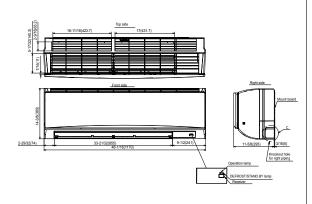


PCA-A24KA7 PCA-A30KA7 INDOOR UNIT

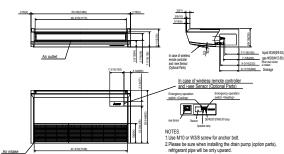


P-Series

PCA-A36KA7 PCA-A42KA7 **INDOOR UNIT**

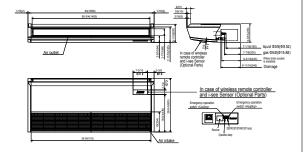


PEAD-A09AA7 PEAD-A12AA7 PEAD-A15AA7 PEAD-A18AA7 PEAD-A24AA7 PEAD-A30AA7 PEAD-A36AA7 PEAD-A42AA7

INDOOR UNIT

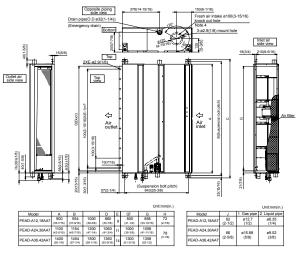

PVA-A12AA7 PVA-A18AA7 PVA-A24AA7 PVA-A30AA7 PVA-A36AA7 PVA-A42AA7 INDOOR UNIT

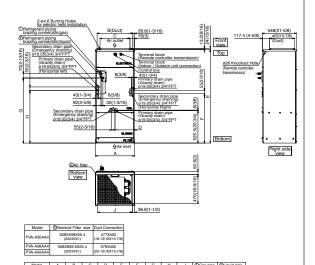


167

P-Series


PUZ-A12NKA7 PUZ-A12NKA7-BS PUZ-A18NKA7 PUZ-A18NKA7-BS PUY-A12NKA7 PUY-A12NKA7-BS PUY-A18NKA7 PUY-A18NKA7-BS

OUTDOOR UNIT

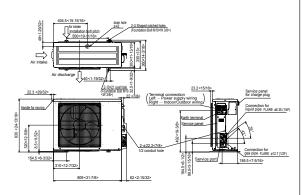


PUZ-A24NHA7 PUZ-A24NHA7-BS PUZ-HA24NHA
PUZ-A30NHA7 PUZ-A30NHA7-BS
PUY-A24NHA7 PUY-A24NHA7-BS
PUY-A30NHA7 PUY-A30NHA7-BS

OUTDOOR UNIT

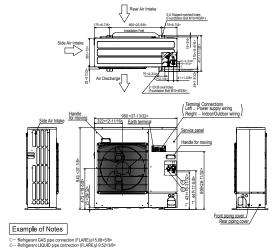


PUZ-A36NKA7 PUZ-A36NKA7-BS PUZ-A42NKA7 PUZ-A42NKA7-BS PUY-A36NKA7 PUY-A36NKA7-BS PUY-A42NKA7 PUY-A42NKA7-BS

OUTDOOR UNIT

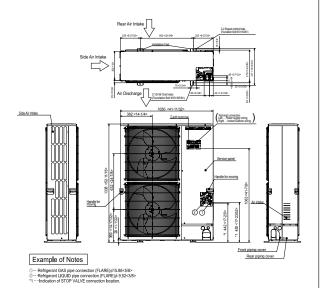

PUZ-HA30NHA5 PUZ-HA36NHA5


OUTDOOR UNIT

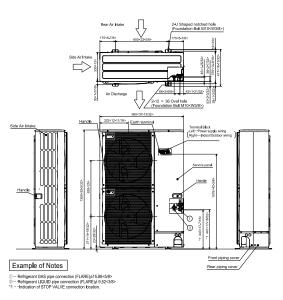

P-Series

PUZ-HA42NKA
OUTDOOR UNIT


Example of Notes

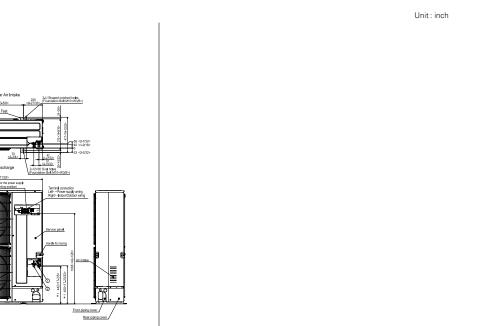


External Dimensions: MX Model

NAXMMX20A122A*

OUTDOOR UNIT

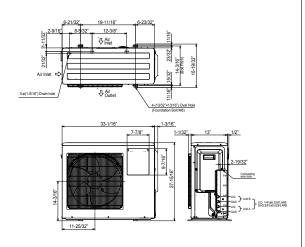


Unit: inch/cm NAXMMX24A132A* NAXMMX30A132A* NAXMMX36A142A* **OUTDOOR UNIT**

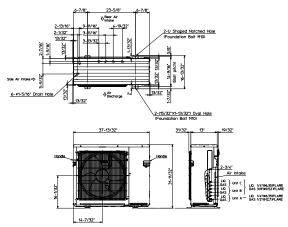


NAXMMX42A152A* NAXMPH20A122A* NAXMPH24A132A* NAXMPH30A132A*

OUTDOOR UNIT

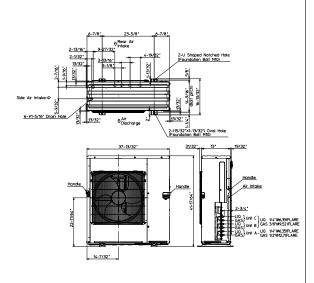


NAXMMX48A182A* NAXMMX60A182A* NAXMPH36A142B* NAXMPH42A152B* NAXMPH48A182B*

OUTDOOR UNIT

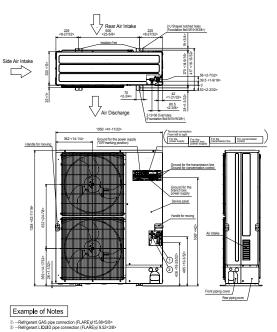

MX Model

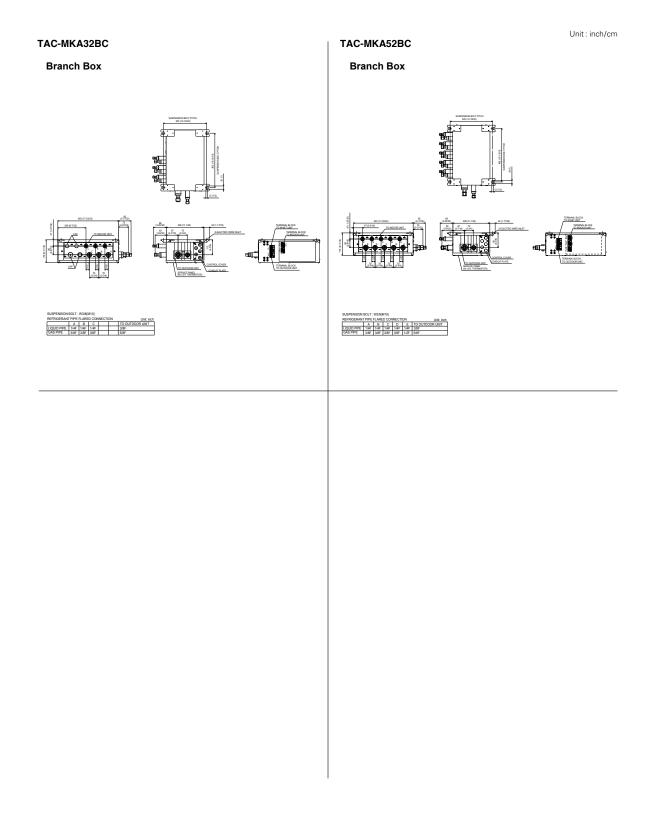

for a greener tomorrow



Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.

⚠ NOTICE

- Do not install indoor units in areas (e.g. mobile phone base stations) where the emission of VOCs such as phthalate compounds and formaldehyde is known to be high as this may result in a chemical reaction
- Our air-conditioning equipment and heat pumps contain a fluorinated greenhouse gas, R410A
- When installing or relocating or servicing our air-conditioning equipment, use only the specified refrigerant (R410A) to charge the refrigerant lines
- $\bullet\hspace{0.4mm}$ Do not mix it with any other refrigerant and do not allow air to remain in the lines
- If air is mixed with the refrigerant, then it can be the cause of abnormal high pressure in the refrigerant lines, and may result in an explosion and other hazards
- The use of any refrigerant other than that specified for the system will cause mechanical failure, system malfunction or unit breakdown. In the worst case, this could lead to a serious impediment to securing product safety

© 2020 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

Mitsubishi Electric, Lossnay, and the three-diamond logo are trademarks of Mitsubishi Electric Corporation. CITY MULTI, kumo cloud, kumo station and H2i are registered trademarks of Mitsubishi Electric US, Inc. Trane and American Standard are registered trademarks of Trane Technologies plc. All other product names mentioned herein are trademarks or registered trademarks of their respective owners.

ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the United States Environmental Protection Agency.

Use of the AHRI Certified® mark indicates a manufacturer's participation in the certification program. For verification of certification for individual products, go to www. ahridirectory.org.

Specifications shown in this brochure are subject to change without notice. See complete warranty for terms, conditions and limitations. A copy is available from Mitsubishi Electric Trane HVAC US LLC.

Printed in the USA

SKU: AS_RS_1058_02-20

















